

Potter Creek (upper) Executive Summary



CWCB STAFF INSTREAM FLOW RECOMMENDATION March 15-16, 2023

UPPER TERMINUS: USFS Property Boundary
UTM North: 4269972.26 UTM East: 216078.92

LOWER TERMINUS: confluence with Monitor Creek
UTM North: 4279535.32 UTM East: 220671.03

WATER DIVISION: 4

WATER DISTRICT: 40

COUNTY: Montrose

WATERSHED: Lower Gunnison

CWCB ID: 18/4/A-004

RECOMMENDER: Bureau of Land Management (BLM)

LENGTH: 8.1 miles

EXISTING ISF: 04CW0161, 4 cfs (4/1-6/15), 1.8 cfs (6/16-7/31), 1.4 cfs (8/1-2/29), 1.8 cfs (3/1-3/31)

INCREASE FLOW RECOMMENDATION: ISF protection initiates at 177 cfs and protects all unappropriated streamflow until flow rates recede to the existing ISF (see above) or until 9/30, whichever occurs first. The flow protection will only be in effect 4/1 - 9/30 if the 177 cfs threshold is reached.



COLORADO

**Colorado Water
Conservation Board**

Department of Natural Resources

INTRODUCTION

Colorado's General Assembly created the Instream Flow and Natural Lake Level Program in 1973, recognizing "the need to correlate the activities of mankind with some reasonable preservation of the natural environment" (see 37-92-102 (3), C.R.S.). The statute vests the Colorado Water Conservation Board (CWCB or Board) with the exclusive authority to appropriate and acquire instream flow (ISF) and natural lake level water rights (NLL). Before initiating a water right filing, the Board must determine that: 1) there is a natural environment that can be preserved to a reasonable degree with the Board's water right if granted, 2) the natural environment will be preserved to a reasonable degree by the water available for the appropriation to be made, and 3) such environment can exist without material injury to water rights.

The information contained in this Executive Summary and the associated supporting data and analyses form the basis for staff's ISF recommendation to be considered by the Board. This Executive Summary provides sufficient information to support the CWCB findings required by ISF Rule 5i on natural environment, water availability, and material injury. Additional supporting information is located at: <https://cwcb.colorado.gov/2023-isf-recommendations>.

RECOMMENDED ISF REACH

The BLM recommended that the CWCB appropriate an increase to an existing ISF water right on a reach of Potter Creek. Potter Creek is located within Montrose County (See Vicinity Map) and is approximately 11 miles southwest from City of Delta. The stream originates on the east side of the Uncompahgre Plateau and flows northeast until it reaches the confluence with Roubideau Creek which is a tributary to the Gunnison River. The existing ISF water right on Potter Creek was appropriated in 2004 for the following flow rates and times; 4 cfs (4/1-6/15), 1.8 cfs (6/16-7/31), 1.4 cfs (8/1-2/29), 1.8 cfs (3/1-3/31). The proposed reach extends from the U.S. Forest Service Property Boundary downstream to the confluence with Monitor Creek for a total of 8.1 miles. The entire proposed reach is on public land managed by the BLM (See Land Ownership Map).

BACKGROUND

The BLM found upper Potter Creek suitable for inclusion in the National Wild and Scenic Rivers System based in part on the presence of rare riparian communities that qualified as outstandingly remarkable values (ORVs; BLM, 2020). This finding was informed by surveys conducted by the Colorado Natural Heritage Program (CNHP)¹ that determined that Potter Creek contained rare plant communities that warranted conservation (Damm and Stevens, 2000; Stephens et al., 1999). On Potter Creek, CNHP identified five imperiled and vulnerable riparian populations that are rarely found in the same habitat.

Although BLM recognized that Potter Creek has some ISF protection, the suitability determination specifically noted that the current lack of flow protection for globally significant riparian values was a significant factor driving BLM's suitability determination. The Final

¹ The Colorado Natural Heritage Program is Colorado's only comprehensive source of information on the status and location of Colorado's rarest and most threatened species and plant communities. CNHP is a non-academic department of the Warner College of Natural Resources at Colorado State University. It is also a member of the NatureServe Network, "which is an international network of partners that use the same scientific methodology to enable scientists to monitor the status of species and natural plant communities from state, national, and global perspectives."

Resource Management Plan for BLM's Uncompahgre Field Office stated that if scientific studies conclude that alternative forms of flow protection are in place and are sufficient to fully protect the flow-related ORVs on Monitor and Potter Creeks, the BLM will determine it is unnecessary to quantify, assert, or adjudicate a federal reserved water right for these segments if they are ultimately designated into the National Wild and Scenic River System.

At the request of the CWCB, BLM developed a concept to preserve the riparian communities of these streams using the ISF program. The proposed ISF is based on protecting high-flow events and the falling limb of the hydrograph which create the conditions necessary for seedlings to survive and sustain the population of the riparian community. This ISF increase would only be active during the primary growing season and only when flows are sufficiently high to provide benefits to the riparian community. At other times, the existing ISF would continue to provide some flow protection for aquatic habitat.

OUTREACH

Stakeholder input is a valued part of the CWCB staff's analysis of ISF recommendations. Currently, more than 1,100 people subscribe to the ISF mailing list. Notice of the potential appropriation of an ISF water right on Potter Creek was sent to the mailing list in November 2022, March 2022, November 2021, March 2021, November 2020, March 2020, November 2019, March 2019, March 2018, and March 2017. No private landowners were identified as being adjacent to this reach of Potter Creek. A public notice about this recommendation was published in the Montrose Daily Press on January 8, 2022 and December 21, 2022.

Staff presented information about the ISF program and this recommendation to the Montrose County Board of County Commissioners on October 3, 2017, December 9, 2019, and November 21, 2022. In addition, staff spoke with State Engineer Kevin Rein on June 6, 2017, and with State Engineer Kevin Rein, and Deputy State Engineer Tracy Kosloff on October 9, 2020 regarding the administrability of this ISF recommendation. Staff also communicated with Bob Hurford, Division Four Engineer and Luke Reschke, Lead Water Commissioner regarding water rights and water use practices on Potter Creek.

NATURAL ENVIRONMENT

CWCB staff relies on the recommending entity to provide information about the natural environment. In addition, staff reviews information and conducts site visits for each recommended ISF appropriation. This information is used to provide the Board with a basis for determining that a natural environment exists. Please see BLM's letter of recommendation which includes more detailed information about the plant communities, riparian flow needs, and the importance of protecting the riparian communities.

Riparian Community

Potter Creek starts near Columbine Pass on the Uncompahgre Plateau, it descends through forested lands before carving a gradually deepening canyon. The valley floor contains a wide riparian corridor. CNHP surveys found that Potter Creek supports a healthy riparian plant community that is part of the Rocky Mountain Lower Montane-Foothills Riparian Woodland and Shrubland Ecological System (CNHP website).

Specifically, Potter Creek contains five rare, imperiled communities:

- A population of narrowleaf cottonwood, strapleaf willow, and silver buffaloberry (*Populus angustifolia*/*Salix ligulifolia*/*Shepherdia argentea*) riparian forest
- A population of narrowleaf cottonwood and skunkbush sumac (*Populus angustifolia*/*Rhus trilobata*) riparian forest
- A population of narrowleaf cottonwood and Douglas fir (*Populus angustifolia*/*Pseudotsuga menziesii*) riparian woodland
- A population of Douglas fir and red osier dogwood (*Pseudotsuga menziesii*/*Cornus sericea*) riparian woodland
- A population of narrowleaf cottonwood and red osier dogwood (*Populus angustifolia*/*Cornus sericea*) riparian woodland

Narrowleaf cottonwoods (Figure 1) are members of the willow family that can grow up to 80 feet in height. Strapleaf willows are deciduous shrubs that can grow up to six feet in height. Silver buffaloberry are deciduous, thicket-forming shrubs that are drought-hardy and can grow up to 20 feet in height. Skunkbush sumac is a deciduous, flowering shrub, averaging four feet in height. Douglas firs are evergreen pines that can grow to between 70 and 330 feet in height and can reach eight feet in diameter. Red osier dogwoods are woody deciduous shrub that can grow up to 20 feet in height.

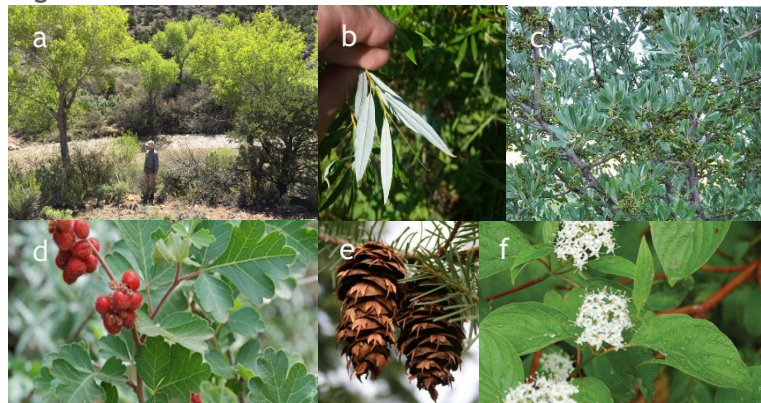


Figure 1. Images of species in the upper Potter Creek riparian area. a) narrowleaf cottonwood, b) strapleaf willow, c) silver buffaloberry, d) skunkbush sumac, e) Douglas fir, f) red osier dogwood

Potter Creek also includes extensive acreage of other non-imperiled riparian communities and species, that were noted by CNHP to be in very good condition such as Fremont cottonwood (*Populus deltoides ssp. Wislizenii*), thin leaf alder (*Alnus incana*), snowberry (*Symphoricarpos oreophilus*), Utah serviceberry (*Amelanchier utahensis*), and blue spruce (*Picea pungens*) (Damm and Stevens, 2000; Stephens et al., 1999).

The combination of narrowleaf cottonwood, strapleaf willow, and silver buffaloberry is rated by CNHP as both globally and state vulnerable, which is defined as being at moderate risk of extinction with 21 to 100 occurrences of these communities in the world (Damm and Stevens, 2000). The combination of narrowleaf cottonwood and skunkbush sumac is rated by CNHP as both globally and state vulnerable, which is defined as being at moderate risk of extinction with 21 to 100 occurrences of these communities in the world. The combination of narrowleaf

cottonwood and Douglas fir is rated by CNHP as state imperiled and globally vulnerable, which is defined as being at high risk of extinction with 6 to 20 occurrences of these communities statewide and being at moderate risk of extinction with 21 to 100 occurrences of these communities in the world. The combination of Douglas fir and red osier dogwood is rated by CNHP as state imperiled and globally apparently secure, which is defined as being high risk of extinction with 6 to 20 occurrences of these communities statewide and being quite rare in parts of its range with around 100 occurrences in the world. The combination of narrowleaf cottonwood and red osier dogwood is rated by CNHP as both globally and state apparently secure, which is defined as being quite rare in parts of its range with around 100 occurrences in the world. Even though populations of these collective species are widely distributed, these species are rarely found growing in the same location as communities because of their different habitat needs which are rarely met simultaneously.

CNHP included Potter Creek as one of 25 wetland and riparian sites within Ouray and eastern Montrose counties that most merit conservation efforts and as one of four areas of local significance based on its ecosystem functions and values (Stephens et al., 1999). Both CNHP and BLM found Potter Creek to have high biodiversity with the riparian community in good condition, few non-native species, and minimal anthropogenic disturbance. CNHP ranked Potter Creek biodiversity as having very high significance with one of the best examples of a community type, good occurrence of globally critically imperiled species, or an excellent occurrence of a globally imperiled or vulnerable species.

CNHP designated the Potter Creek watershed as part of the Roubideau Potential Conservation Area (PCA) because highly functioning riparian areas with an intact assemblage of historic native species are so rare in the Uncompahgre River basin. PCAs focus on capturing the ecological processes necessary for the continued existence of plants or plant communities with natural heritage significance. PCAs are meant to be used for conservation planning purposes but have no legal status. CHNP states that, “the Roubideau Creek Conservation PCA merits special status, such as designation as a BLM Area of Critical Environmental Concern (ACEC) or Research Natural Area” (Stephens et al., 1999).

Riparian communities are important because they provide many critical hydrologic, watershed, and ecosystem functions (Stephens et al., 1999). Hydrologically, riparian areas can help mitigate the impacts of floods by reducing water velocity and attenuating peak flows. They also stabilize streambanks and prevent erosion and unraveling of the channel during high-flow events. Heavily vegetated riparian corridors provide biogeochemical functions of filtering out sediment and toxins. Riparian communities directly support wildlife by providing diverse habitat types including forest, dense scrub, and shrub. In semi-arid regions of the western United States, an estimated 80% of mammals, birds, reptiles, and amphibians use riparian areas and wetlands for habitat throughout the year or as migratory rest stops (Somers and Floyd-Hanna, 1996). The riparian corridor also provides shade to reduce water temperatures and organic matter which provides habitat and food for the aquatic ecosystem.

Preserving the riparian corridor in Potter Creek is warranted to preserve a rare riparian community that provides important functions including maintaining overall system resiliency. This riparian community is uniquely adapted to the Uncompahgre Plateau which includes extremes of high and low streamflow conditions in a semi-arid region. These diverse riparian communities of native species are well adapted to their location and are better able to

withstand environmental stresses and catastrophic events. When a watershed is more resilient, it is better able to rebound following disturbances such as severe storms, flooding, landslides, mudslides, and wildfires. Resiliency also mitigates the impact of those disturbances on the surrounding communities, which improves outcomes for both people and ecosystems.

Native Fish

Although not the primary basis for the proposed ISF, Potter Creek also provides important habitat for the three-species: Flannelmouth Suckers (*Catostomus latipinnis*), Bluehead Suckers (*Catostomus discobolus*), and Roundtail Chub (*Gila robusta*). These species are identified by the state of Colorado as Species of Greatest Conservation Need and by the BLM as sensitive species. They are also subject to a multi-state conservation agreement designed to prevent a listing of the species under the Endangered Species Act (Utah DNR, 2006).

Colorado Parks and Wildlife (CPW) has conducted extensive research on in the Roubideau Creek basin including monitoring streamflow, fish sampling, and fish tracking to determine movement patterns and spawning site selection. CPW found that upwards of 25,000 fish use the Roubideau Creek drainage to spawn annually, with thousands of fish using tributaries such as Potter Creek. Individual fish have very high annual spawning tributary fidelity in this area, with up to 77% of individuals returning to the drainage multiple years in a row (Thompson and Hooley-Underwood, 2019).

High-flow events are also important for the three-species. These species are cued to spawn when streamflow in the tributaries increases during runoff. A gradual receding flow after the spring peak supports the development of eggs, hatching, larvae development, provides habitat for juvenile fish to grow and mature, and allows adult fish to move back into larger river systems before they become stranded. These findings highlight the importance of Potter Creek for the three-species, especially because few other accessible and flowing tributary networks remain.

ISF QUANTIFICATION

BLM staff, in conjunction with CWCB, evaluated the flow needs of the riparian communities and examined several methods to quantify the flow rates necessary to preserve the species.

Flow Needs of Riparian Communities

The BLM conducted a review of scientific literature to identify the flow regime needed to support the imperiled and vulnerable riparian communities of Potter Creek (See BLM's recommendation letter for additional details). Considerable research has been conducted on the hydrologic conditions necessary for establishment and persistence of cottonwood trees. Those studies conclude that the persistence of cottonwood trees as part of a riparian community is highly dependent on infrequent flood or high-flow events (Cooper et al., 1999). High-flow events create disturbed areas and wet sediment deposits where cottonwood can germinate by seed, root, or branch fragment propagation (Scott et al., 1997).

Like cottonwood trees, strappleaf willow, silver buffaloberry, skunkbush sumac, and red osier dogwood benefit from flood events. Strappleaf willow and silver buffaloberry seeds require disturbed areas and wet sediment deposits for germination and development. Skunkbush sumac and red osier dogwood also reproduce by seed and root sprouts. Sprouting occurs more frequently in response to large disturbance events such as floods. However, unlike cottonwood trees, skunkbush sumac, red osier dogwood, and silver buffaloberry need well-drained soils and

will not tolerate long-duration high-flow events or high-water tables for long durations. BLM believes that the sandstone-based soils along Potter Creek and the generally short duration of high-flow events allows these species to survive and grow collectively.

In addition to high-flow events, research also concludes that slowly receding flow rates after the event are important for maintaining water levels in the alluvial aquifer. This allows the roots of new seedlings to grow and remain in contact with the receding groundwater levels in riparian soils (Mahoney and Rood, 1998). Baseflows, which occur in later summer, fall, and winter, also maintain water levels in the alluvial aquifer, supporting deep-rooted cottonwoods and willows, which both require constant access to groundwater to prevent dieback of upper branches or mortality.

Because high-flow events are critical to long-term reproduction and success of the riparian community, BLM focused on identifying the flow rate that would start to inundate the riparian community. BLM identified that bankfull, which is typically the elevation where streams start to access the floodplain and riparian vegetation, was an appropriate threshold necessary to preserve the riparian community. When streamflow is at bankfull conditions or above, important processes required for the long-term survival of the plants can occur, including creating areas where wet sediment is deposited, dispersal of seeds and branches, depositing nutrients on the floodplain, and recharge of the alluvial aquifer.

Hydraulic Modeling

BLM staff explored using the U.S. Forest Service's WinXSPRO model to identify the flow rate necessary to preserve the riparian communities. After evaluating the model, BLM and CWCB staff determined that the U.S. Army Corps of Engineers (USACE) Hydrologic Engineering Center's River Analysis System (HEC-RAS) would produce more reliable results. HEC-RAS is widely used throughout the United States for hydraulic modeling of floods. This model uses multiple cross-sections to perform more advanced calculations than approaches that rely on single cross-sections. It is also capable of producing maps that illustrate the portions of the channel inundated at different flows. BLM and CWCB staff concluded that results from the HEC-RAS model were more appropriate and accurate for modeling high flows.

CWCB staff hired AECOM, an outside engineering firm, at the beginning of 2021 to collect detailed survey information and develop hydraulic models for the sites in each of the four proposed ISF reaches. CWCB Staff, BLM staff, and the AECOM surveyor selected a reach on upper Potter Creek about 0.4 miles upstream from the lower terminus. This site was selected based on the presence of the riparian species of interest and channel characteristics that were conducive to modeling efforts. In each selected site, AECOM surveyed cross-sections to measure channel geometry and floodplain topography. Bankfull indicators were identified by CWCB and BLM staff at each cross-section. In addition to elevation data, the AECOM surveyor also measured the location of debris piles deposited by exceptionally large and infrequent flow events. A total of five cross-sections were surveyed on the selected reach of upper Potter Creek.

AECOM then developed a hydraulic model for each reach using HEC-RAS version 5.0.7 (AECOM, 2021). Manning's *n* values were selected based on aerial imagery and photos collected during the field survey which showed the nature of the channel, bed material, and vegetation. These values were selected in accordance with Table 3-1 in the HEC-RAS 5.0.1 Reference Manual. On

Potter Creek, the Manning's n values value in the channel was set to 0.055, the values in the floodplain were set to between 0.06 and 0.07. Using an iterative process, discharge values were entered into the model to find the streamflow that best corresponded with the surveyed bankfull indicators and the lowest and highest elevation flood debris. The bankfull discharge minimized the difference between the modeled water surface elevation and the surveyed bankfull elevations.

On upper Potter Creek, AECOM determined that the surveyed bankfull indicators correspond to a flow of 177 cfs (Table 1). The lower elevation flood debris corresponds to a streamflow of 310 cfs and the maximum elevation of the debris corresponds to a streamflow of 753 cfs.

Table 1. HEC-RAS modeling results for upper Potter Creek.

Parameter	Discharge, cfs
Bankfull	177
Minimum elevation of flood debris	310
Maximum elevation of flood debris	753

ISF Recommendation

This recommended ISF water right is specifically structured to protect the high-flow component of the hydrologic regime that is critical to the persistence of riparian communities. This water right also protects the receding limb of the hydrograph. Protecting bankfull flows and the receding limbs of the hydrograph will provide the conditions necessary for the reproduction and maintenance of riparian communities. The BLM recommends the following flows based on modeling analyses and the biological needs of the riparian communities:

When the flow rate reaches 177 cfs (bankfull flow), all flow in the creek should be protected until the flow rate recedes to the existing instream flow water right appropriated in 2004.

BLM recommends that the proposed water rights be in effect only during the April 1 to September 30 period, if the flow rate threshold is met. This time frame corresponds to the portion of the year when the riparian community is actively growing and reproducing and when most high-flow events occur due to snowmelt runoff and monsoonal thunderstorms. During years in which streamflow does not reach the proposed threshold, this instream flow water right for high-flow events would not be in effect.

WATER AVAILABILITY

CWCB Staff conducts hydrologic analyses for each recommended ISF appropriation to provide the Board with a basis for making the determination that water is available.

Water Availability Methodology

Each recommended ISF reach has a unique flow regime that depends on variables such as the timing, magnitude, and location of water inputs (such as rain, snow, and snowmelt) and water losses (such as diversions, reservoirs, evaporation and transpiration, groundwater recharge, etc.). Although extensive and time-consuming investigations of all variables may be possible, Staff takes a pragmatic and cost-effective approach to analyzing water availability. This

approach focuses on streamflows and the influence of flow alterations, such as diversions, to understand how much water is physically available in the recommended reach.

Staff's hydrologic analysis is data-driven, meaning that Staff gathers and evaluates the best available data and uses the best available analysis method for that data. Whenever possible, long-term stream gage data (period of record 20 or more years) will be used to evaluate streamflow. Other streamflow information such as short-term gages, temporary gages, spot streamflow measurements, diversion records, and StreamStats will be used when long-term gage data is not available. StreamStats, a statistical hydrologic program, uses regression equations developed by the USGS to estimate a selected basin's streamflow statistics including flood discharge and frequency characteristics (Capesius and Stephens, 2009). Diversion records will also be used to evaluate the effect of surface water diversions when necessary. Interviews with water commissioners, landowners, and ditch or reservoir operators can provide additional information. A range of analytical techniques may be employed to extend gage records, estimate streamflow in ungaged locations, and estimate the effects of diversions. The goal is to obtain the most detailed and reliable estimate of hydrology using the most efficient analysis technique.

Unlike other ISF water rights, this ISF will only be in effect when the bankfull threshold is reached and only during a limited portion of the year. This proposed ISF is not structured to occur year-round and is not expected to occur every year or even in most years. Therefore, median flow is not assessed in this analysis because the high-flow events necessary for the riparian community are not anticipated to occur on a median basis. Instead, the water availability analysis for upper Potter Creek provides information about the known hydrology in the area, the available streamflow data in Potter Creek, and the potential characteristics of these high-flow events.

Basin Characteristics

The drainage basin of the proposed ISF on upper Potter Creek is 25.7 square miles, with an average elevation of 7,658 feet and average annual precipitation of 19.33 inches (See the Hydrologic Features Map). Hydrology throughout the Uncompahgre Plateau demonstrates a relatively early snowmelt runoff pattern that is also influenced by monsoon and late-season storms. This results in high-flow events that can occur between early spring and summer due to snowmelt and high-flow events that can occur between summer and late fall due to rain events. A gage on Roubideau Creek, located downstream from Cottonwood Creek, Monitor Creek, and Potter Creek (Roubideau Creek at mouth near Delta, CO gage, USGS 09150500, period of record 1939 to 1953 and 1976 to 1983) shows that most annual peaks occur in May but can occur as late as October (Figure 2).

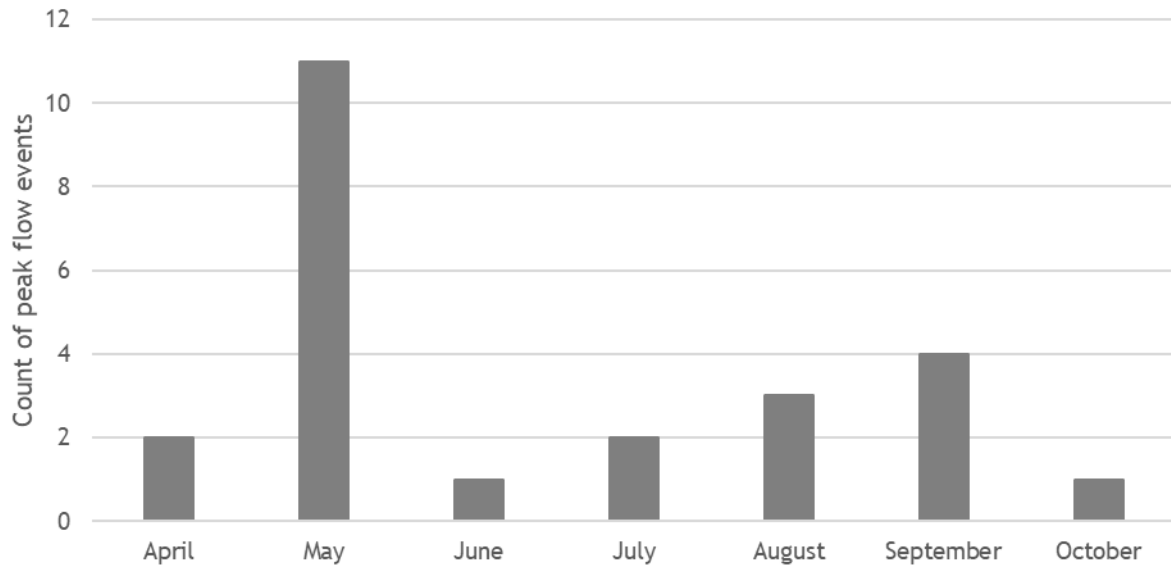


Figure 2. Number of times the peak occurred each month at the Roubideau Creek at mouth near Delta, CO peak flow gage data from 1939-1953 and 1976-1983.

Snowmelt runoff typically produces the high-flow event with the longest duration, which can last weeks to months. Rain events have the potential to produce very high flows but are typically short-duration events. Streamflow in this region can be highly variable, some years may have substantial flows while other years have little to no measurable flow.

Existing Water Uses

There are very few water rights in the basin tributary to the proposed ISF on Upper Potter Creek. There are four spring water rights for a total of 0.0638 cfs, one well, and 18 small reservoirs which have a total storage of 9.8 acre-feet. Two small springs are located within the proposed reach, but all other water rights are located upstream from the proposed reach. These water rights are unlikely to alter hydrology in the basin and streamflow is essentially natural.

Data Collection and Analysis

A number of different sources of information were used to assess hydrology in upper Potter Creek. Each source will be presented in subsections for clarity.

USGS Potter Creek gages

There are two historic USGS streamflow gages on Potter Creek. The Potter Creek near Olathe, CO gage (USGS 9149910, 1979-1981) was located approximately 2,000 ft upstream from the proposed lower terminus at the confluence with Monitor Creek. The Potter Creek near Columbine Pass gage (USGS 9149900, 1980-1981) was located above 5 miles upstream from the proposed reach. The Potter Creek near Olathe gage (termed USGS Potter gage here for simplicity) is more representative of the proposed ISF reach and is the only gage that was evaluated further.

The USGS Potter Creek gage, located near the lower terminus, has essentially the same drainage basin characteristics as the proposed lower terminus of this reach. It is also affected by the same limited water uses described above. These water uses have been in practice for some

time and are included in the gage data. Due to the short record, Staff evaluated the Roubideau Creek at mouth near Delta, CO gage (USGS 09150500 or DWR ROUDELCO) to evaluate the 1979-1981 time period. The Roubideau Creek gage has been operated from October 1938 to October 1954, May 1976 to October 1983, and February 2004 to August 2008 for a total of 29 to 31 years of data depending on the day of the year. This analysis finds that the average annual flow volume at the Roubideau gage for Water Year 1980 and 1981 was 128% and 69% respectively of the long-term average. Therefore, the two years of available USGS data likely represent a relatively wet and a relatively dry year.

All available data for the USGS Potter Creek gage is shown in the USGS Potter Creek gage Completed and Detailed Hydrographs which includes daily average values and the annual peak for each year. This shows that the riparian threshold of 177 cfs was exceeded on 6/4/1980 when flows reached 277 cfs. The threshold was not met in 1981.

CPW Potter Creek gage

CPW installs a temporary streamflow gage on Potter Creek annually to monitor spring flows in conjunction with research on spawning movements of native sucker species. This gage (termed the CPW Potter gage) is located about 600 ft upstream from the confluence with Roubideau Creek, which is approximately 1.7 miles downstream from the lower terminus of this proposed reach. The CPW Potter gage is operated seasonally, typically from early spring in March or April through June or early July when the spawning migration is completed, and flows drop. The gage has operated in most years from 2015 to 2022. However, streamflow was too low to develop a rating in 2018, no equipment was deployed in 2020 due to low flows, and equipment malfunctioned in 2021. This gage is not operated through late summer, fall, or winter and therefore does not record information from any flow events during those portions of the year. CWCB staff helped maintain the gage by making multiple streamflow measurements. Staff then used the available data to develop a rating curve to determine streamflow during the gaged portions of the years with data.

Unlike the upper Potter reach, the CPW Potter gage is affected by several water rights. These water rights occur in the Monitor Creek basin and include active surface water diversions that total 67.13 cfs (See the Hydrologic Features Map and Detailed map). The largest of these is the Big Monitor Ditch No 1 (WDID 4001426, 51.85 cfs, appropriated in 1918). There are also 412 acre-feet in active storage rights, 0.53 cfs for springs and pipelines, and 0.4 cfs for well water rights. In addition, there are some diversions that import or export water into the Monitor basin. The Everlasting Ditch (WDID 4001435, 27 cfs, appropriated in 1901 and 1964), which diverts from Cottonwood Creek, irrigates lands in the Monitor Creek basin and may contribute additional flow. The 25 Mesa Upper Little Monitor Ditch (WDID 4001319, 7 cfs, appropriated in 1904) diverts water from Little Monitor Creek, which is used for ponds in the Cottonwood basin and to irrigate lands in both the Monitor Creek and Cottonwood Creek basins.

Climate Conditions

The CPW Potter Creek gage record period (2015-2022) was compared to a longer-term climate record for context. The nearest climate station with a relatively long record is at Columbine Pass (USS0008L02S, 1986 to 2022) located in the headwaters of Potter Creek, approximately 18 miles southwest from the proposed lower terminus. Figure 3 shows cumulative snow water equivalent (SWE) totals for 2015-2022 in comparison to the 30-year average (downloaded from the Colorado River Basin Forecast Center on 2/9/2023). Peak SWE in 2018 was the lowest on

record, 2015, 2020 and 2021 were below average, 2016 was about average, and 2017, 2019, and 2022 were above average. This information demonstrates a range of precipitation in the area during the CPW Potter Creek gage record.

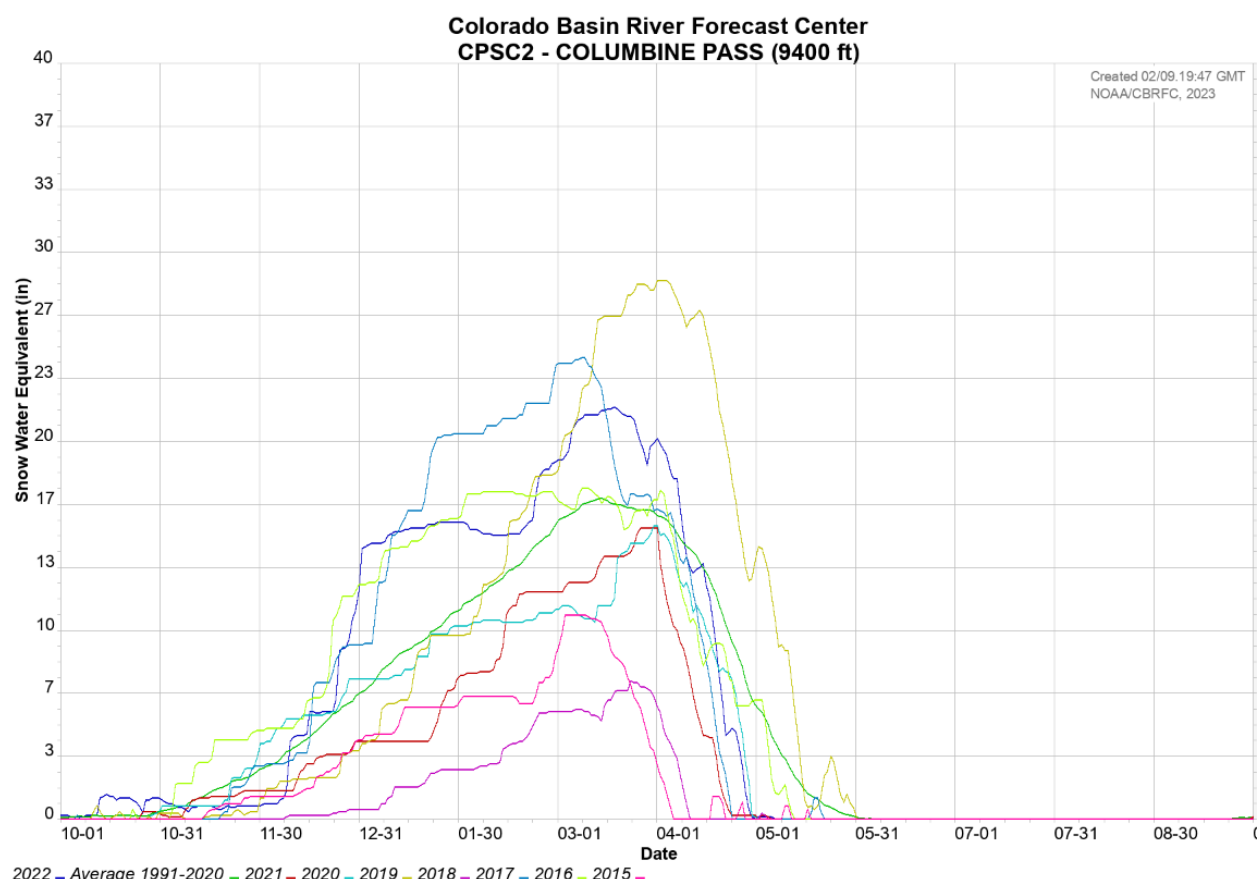


Figure 3. Cumulative SWE for 2015 to 2022 and average SWE from 1991 to 2020 downloaded from the Colorado River Basin Forecast Center on 2/9/2023.

Staff also evaluated streamflow gages to better understand potential streamflow given that persistent low soil moisture in recent years has impacted how much snowfall becomes streamflow. The Dallas Creek gage and San Miguel gages (USGS 09147000 Dallas Creek near Ridgway and USGS 0917700 San Miguel River at Uravan) were selected because they were reasonably close to the Uncompahgre Plateau. The gages are not impacted by large reservoirs; however, they are in different basins and have significant water uses. Years with complete data (provisional or approved data, filling missing data in 2022 with the long-term average) from 1992 to 2022 was used to calculate annual water volumes and basic percentiles. Data from these gages show that 2019 was very wet (greater than 75th percentile); 2015 was wet to dry (greater than 50th percentile for the San Miguel and greater than the 75th percentile for Dallas Creek, 2016 and 2017 was wet or wettest (greater than the 50th percentile for the San Miguel River and greater than 75th percentile for Dallas Creek); 2018, 2020, 2021, and 2022 were in the driest category (less than 25th percentile). 2018 and 2020 were exceptionally dry with annual water volumes less than the 10th percentile. Therefore, the CPW Potter Creek gage data

contains a range of year types, but many years in the record are likely to reflect dry or exceptionally dry conditions.

Based on the existing water use practices in the basin, the streamflow measured at the CPW Potter Creek gage does not reflect natural hydrology. This means that prorating the CPW Potter Creek gage data to the upper Potter Creek lower terminus (that does not have any diversions) may underestimate the amount of water in upper Potter Creek. Nevertheless, the CPW Potter Creek gage, which has a drainage basin that is 25.5 square miles and an average annual precipitation of 19.4 inches, was prorated to the upper Potter Creek lower terminus using a proration factor of 0.459 based on the precipitation-area weighted method.

The resulting estimated hydrology in upper Potter Creek shows a range in streamflow between 2015 and 2022. The highest flows occurred in 2019. There were clear snowmelt runoff events in 2022, 2017, and 2016. Flows were lower in 2015 and very low in 2018 and 2020. There is no data for 2021 due to equipment malfunctions. Based on the CPW Potter Creek gage estimates, the riparian threshold of 177 cfs did not occur between 2015 and 2022.

Direct Flow Measurements

CWCB and BLM staff made 13 flow measurements in the upper Potter Creek reach, as summarized in Table 2.

Table 2. Summary of streamflow measurements for upper Potter Creek.

Visit Date	Flow (cfs)	Collector
04/19/2017	94.80	CWCB
06/07/2017	1.59	CWCB
06/22/2017	0.01	CWCB
04/08/2019	1.98	CWCB
05/15/2019	83.60	CWCB
06/19/2019	5.16	CWCB
04/11/2019	3.26	CWCB
06/22/2022	0.01	CWCB
06/12/2014	0.55	BLM
04/08/2015	7.21	CWCB
04/08/2015	29.57	CWCB
04/13/2017	39.78	CPW
05/22/2017	23.60	BLM

High-Flow Characteristics

The ISF recommendation is based on the importance of high-flow events that help to maintain the rare riparian community on Potter Creek. Based on the available information from the USGS and CPW gages, riparian flows would have been achieved only one time out of the approximate 9 years of record (1980-1981, 2015-2021, and 2022). This event started on 6/4/1980 and would have ended on 6/30/1980 when streamflow dropped below the 2004 ISF flow rate of 1.8 cfs, lasting for a total of 26 days (Table 3).

Table 3. Duration and maximum streamflow for riparian flows in Potter Creek.

Start Date	End Date	Duration, days	Maximum flow, cfs	Data Source
6/4/1980	6/30/1980	26	277	USGS Potter Gage (9149910)

Although the CPW Potter Creek gage does not include data collected during later summer or fall, it is likely that monsoon events do occur in this system. These events have the potential to reach the riparian threshold. For example, the CWCB Monitor Creek gage located in the adjacent and similarly sized basin, measured two high-flow events later in the summer of 2017 and 2019 (see the Monitor Creek March 2023 Executive Summary for more information). These events, if prorated to the Upper Potter Creek basin, were above the 177 cfs riparian threshold.

The USGS StreamStats model estimates different peak flow statistics based on regional regression analysis (Table 4). These estimates provide some information about the potential frequency of high-flow events, but the estimates may have high uncertainty in this area due to the lack of streamflow gages in the region that can be used to inform the models. Nevertheless, these estimates suggest that the riparian threshold of 177 could occur at the frequency of about a 2-year peak flood event.

Table 4. StreamStats estimates of area-averaged high-flow events on upper Potter Creek.

Peak Flow Statistic	Estimated Flow, cfs
2 Year Peak Flood	174
5 Year Peak Flood	326
10 Year Peak Flood	454
25 Year Peak Flood	663
100 Year Peak Flood	1020

High-Flow Event Estimates

AECOM also surveyed the location of large piles of woody debris deposited by previous very infrequent high-flow events on the floodplain of the modeled stream site. The HEC-RAS model was used to estimate the flow necessary to reach the locations of the debris piles. This modeling work estimated that a flow of 310 cfs would reach the minimum elevation of the debris and a flow of 753 cfs would reach the high elevation of the debris. The observation of large piles of debris on the floodplain demonstrates that very high-flow events do occur and that these events can inundate large portions of the floodplain. The StreamStats peak flow statistics estimate that an event capable of reaching the lower elevation flood debris could occur on a 5-year frequency.

Water Availability Summary

The USGS and CPW Potter Creek gages, the AECOM high-flow estimates from flood debris, and StreamStats estimates of peak flow events provide an estimate of the range of streamflow conditions on Potter Creek. These data demonstrate that a high-flow event above the bankfull threshold of 177 cfs occurred in 1980 and that other events may have occurred more recently based on woody debris on the floodplain. In addition, it is likely that rain events later in the summer also reach the riparian threshold based on measured high-flows in the adjacent Monitor Creek basin. Staff has concluded that water is available for ISF appropriation as structured.

MATERIAL INJURY

The proposed ISF on upper Potter Creek can exist without material injury to other water rights because it is a new junior water right. Under the provisions of section 37-92-102(3)(b), C.R.S., the CWCB will recognize any uses or exchanges of water in existence on the date this ISF water right is appropriated.

ADDITIONAL INFORMATION

Citations

AECOM, 2021, Cottonwood, Monitor, and Potter Creek's survey and hydraulics. Memo to CWCB.

Bureau of Land Management, 2020, Record of decision and approved resource management plan for Uncompahgre Field Office, 2020.

Capesius, J.P. and V.C. Stephens, 2009, Regional regression equations for estimation of natural streamflow statistics in Colorado. Scientific Investigations Report 2009-5136.

Colorado Natural Heritage Program, Rocky Mountain lower montane-foothills riparian woodland and shrubland. <https://cnhp.colostate.edu/projects/ecological-systems-of-colorado/details/?elementID=365200>

Cooper D.J., Merritt, D.M., Anderson, D.C. and Chimner, R.A, 1999, Factors controlling the establishment of Fremont cottonwood seedlings on the Upper Green River, USA. Regulated Rivers: Research and Management, 15:419-440.

Damm, M., and J. Stevens, 2000, Assessment of riparian vegetation and wildlife habitat structure: North Fork of the Gunnison tributaries and lower Gunnison tributaries. Colorado Natural Heritage Program.

Mahoney, J.M. and S.B. Rood, 1998, Streamflow requirements for cottonwood seedling recruitment- an integrative model. Wetlands, 18; 634-645.

Scott, M.L., Auble, G.T., and Friedman, J.M., 1997, Flood dependency of cottonwood establishment along the Missouri River, Montana, USA. Ecological Applications, 7:677-690.

Somers, P. and L. Floyd-Hanna, 1996, Wetlands and riparian habitats, and rivers. In Blair, R., ed. pp. 175-192. The western San Juan Mountains: their geology, ecology, and human history. University Press of Colorado, Niwot, CO.

Stephens, T., D. Culver, J. Zoern, and P. Lyon, 1999, A natural heritage assessment of wetlands and riparian areas in Uncompahgre River basin: Eastern Montrose and Ouray Counties Volume II. Colorado Natural Heritage Program.

Thompson, K.G., and Z.E. Hooley-Underwood, 2019, Present distribution of three Colorado River basin native non-game fishes, and their use of tributaries. Technical publication No. 52, Colorado Parks and Wildlife Aquatic Research Section.


Utah Department of Natural Resources, Division of Wildlife Resources, 2006, Range-wide conservation agreement and strategy for Roundtail Chub *Gila robusta*, Bluehead Sucker *Catostomus discobolus*, and Flannelmouth Sucker *Catostomus latipinnis*.

Metadata Descriptions


The UTM locations for the upstream and downstream termini were derived from CWCB GIS using the National Hydrography Dataset (NHD).

Projected Coordinate System: NAD 1983 UTM Zone 13N.


VICINITY MAP

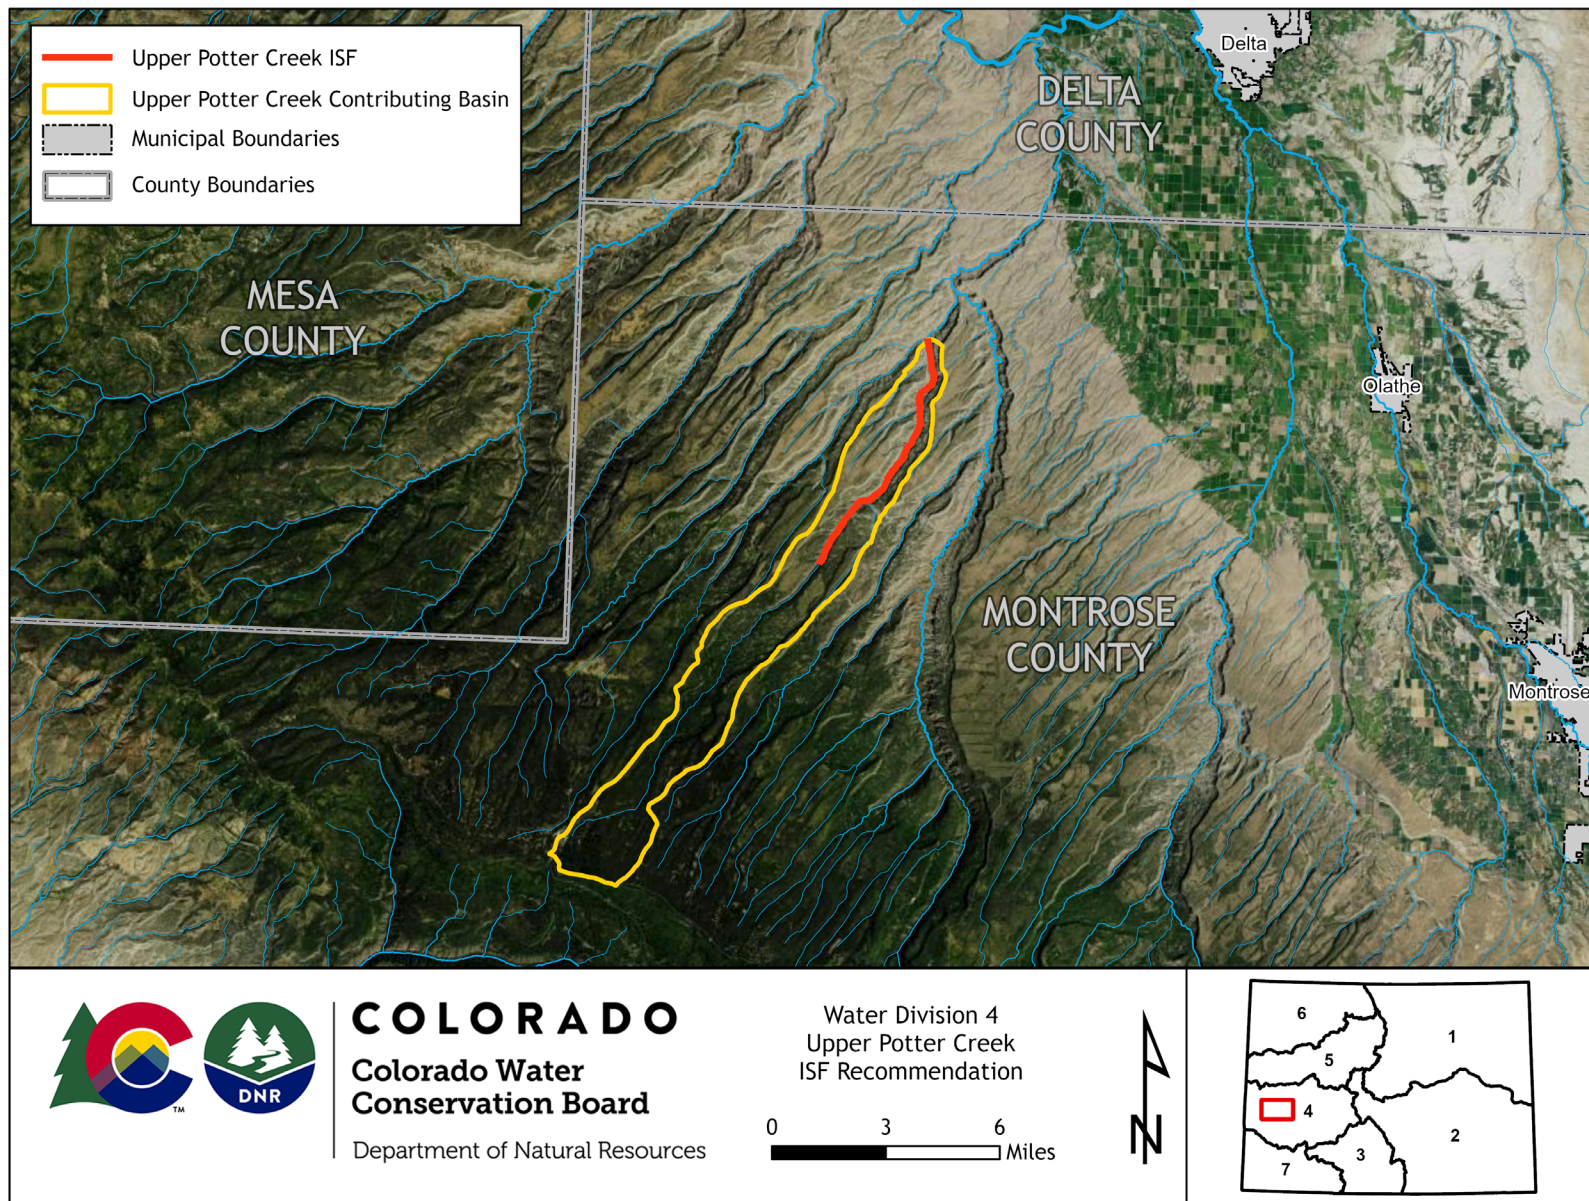


LAND OWNERSHIP MAP

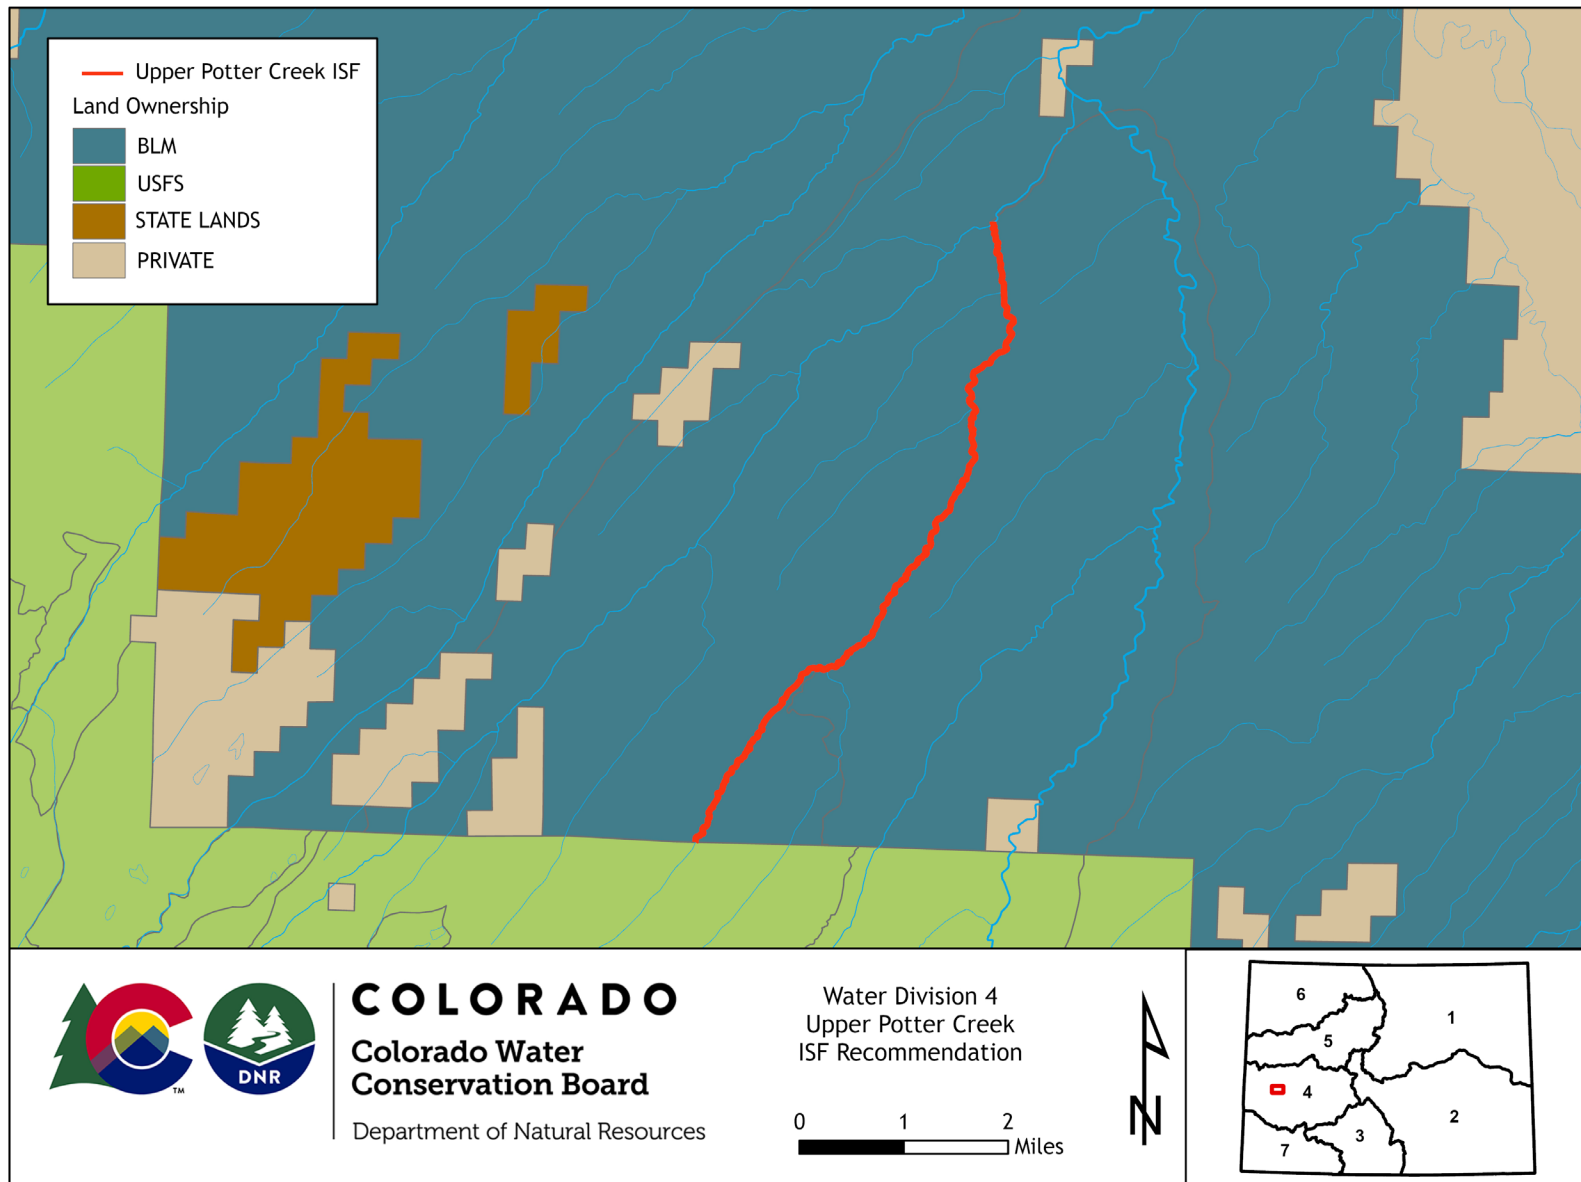


HYDROLOGIC FEATURES MAP

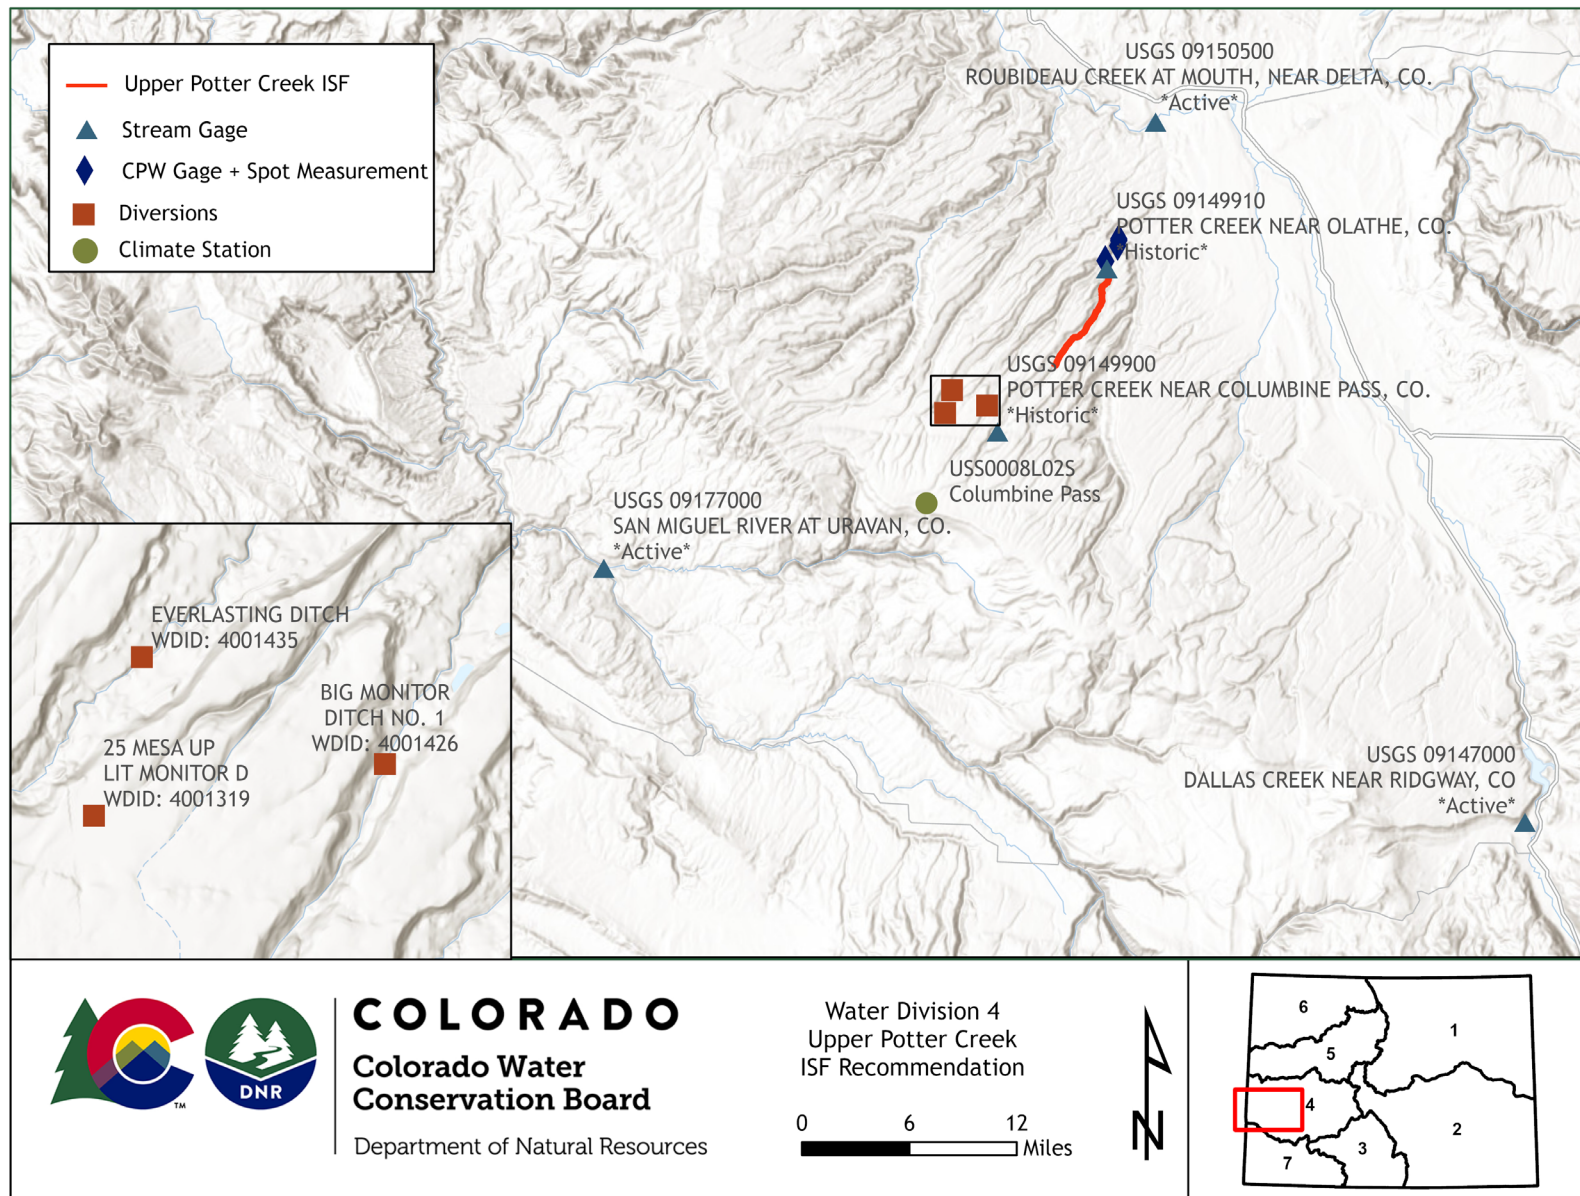

USGS POTTER CREEK GAGE COMPLETE HYDROGRAPH

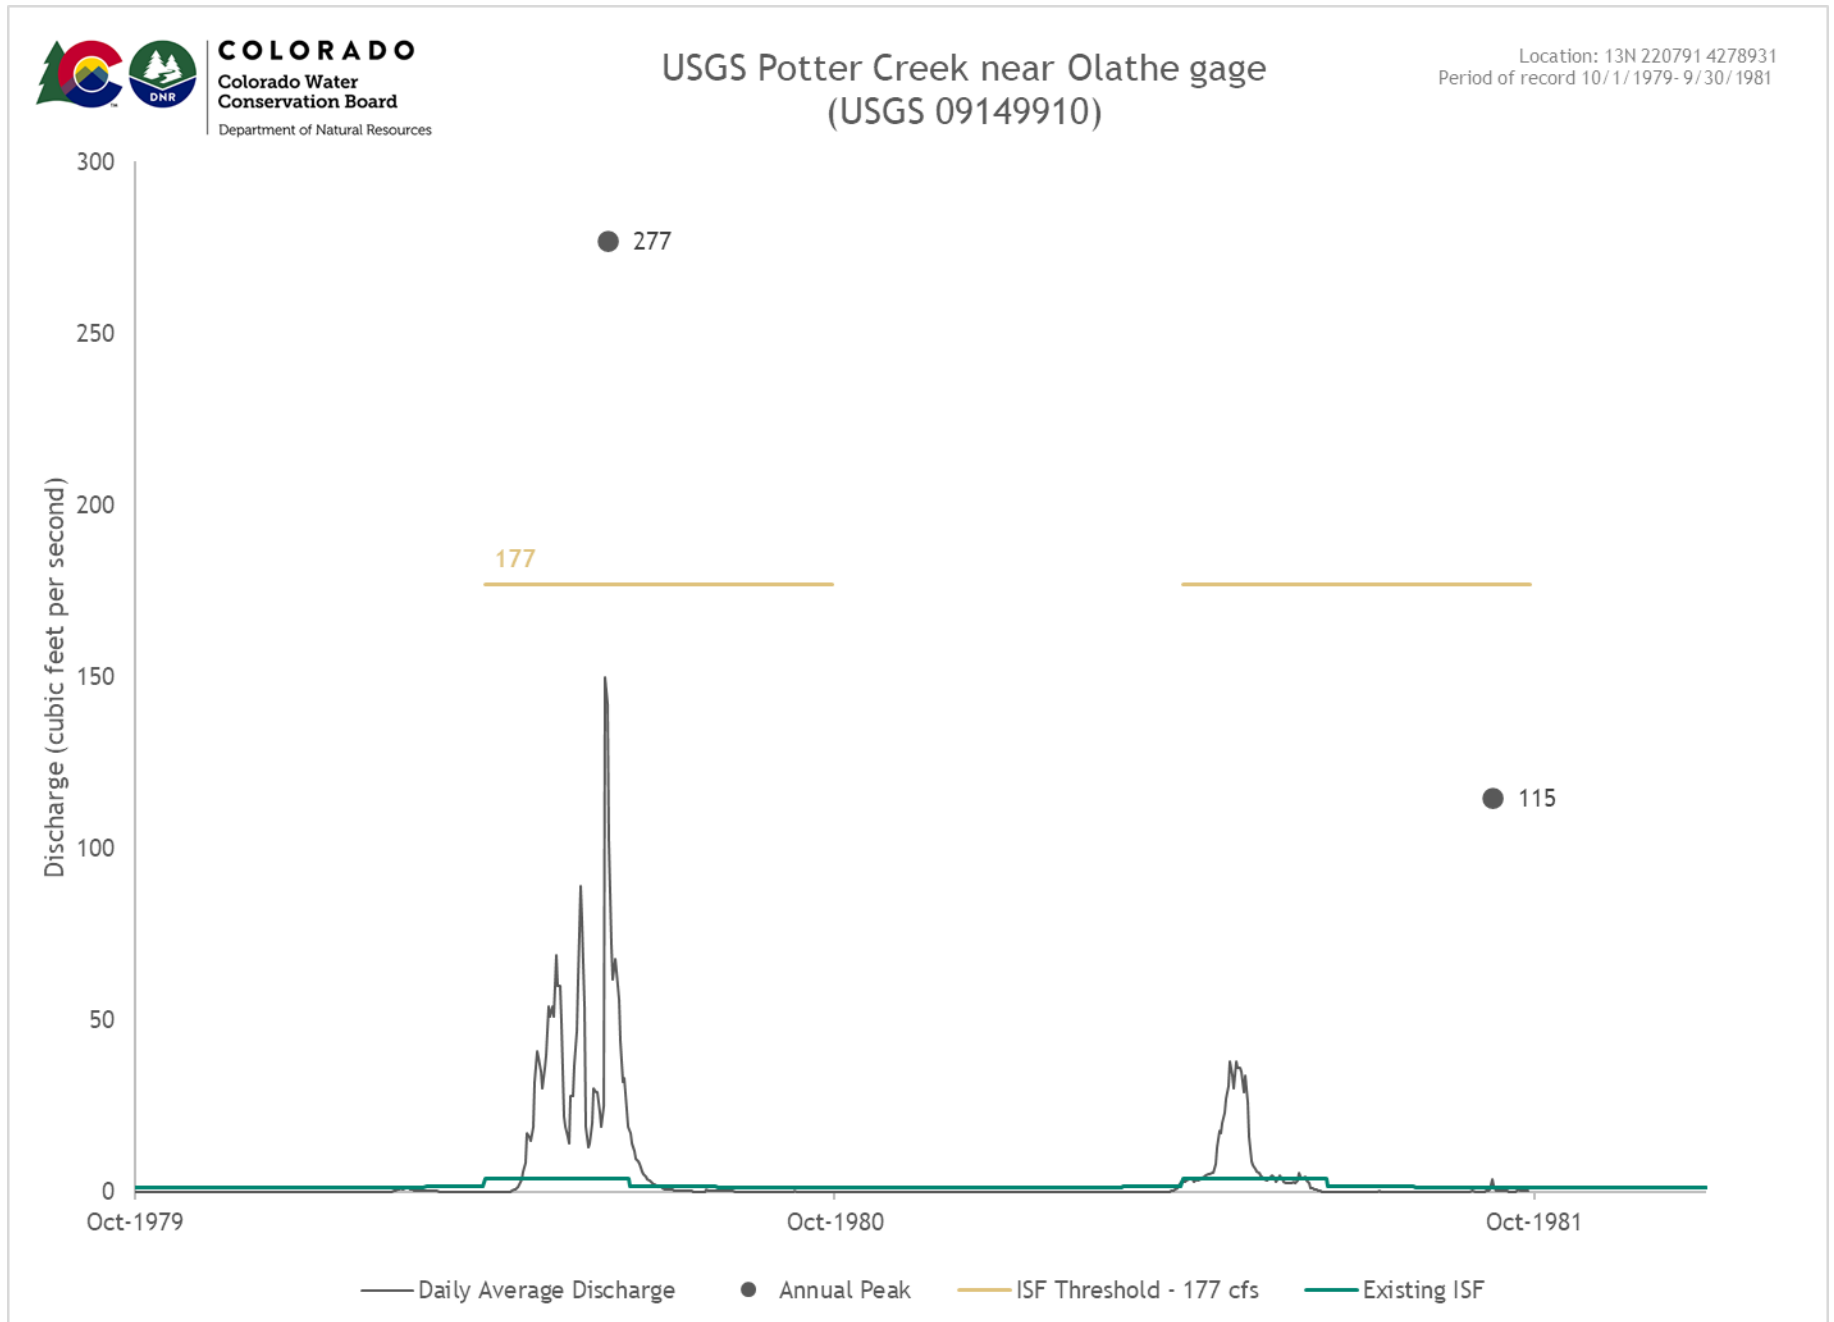

USGS POTTER CREEK GAGE DETAILED HYDROGRAPH

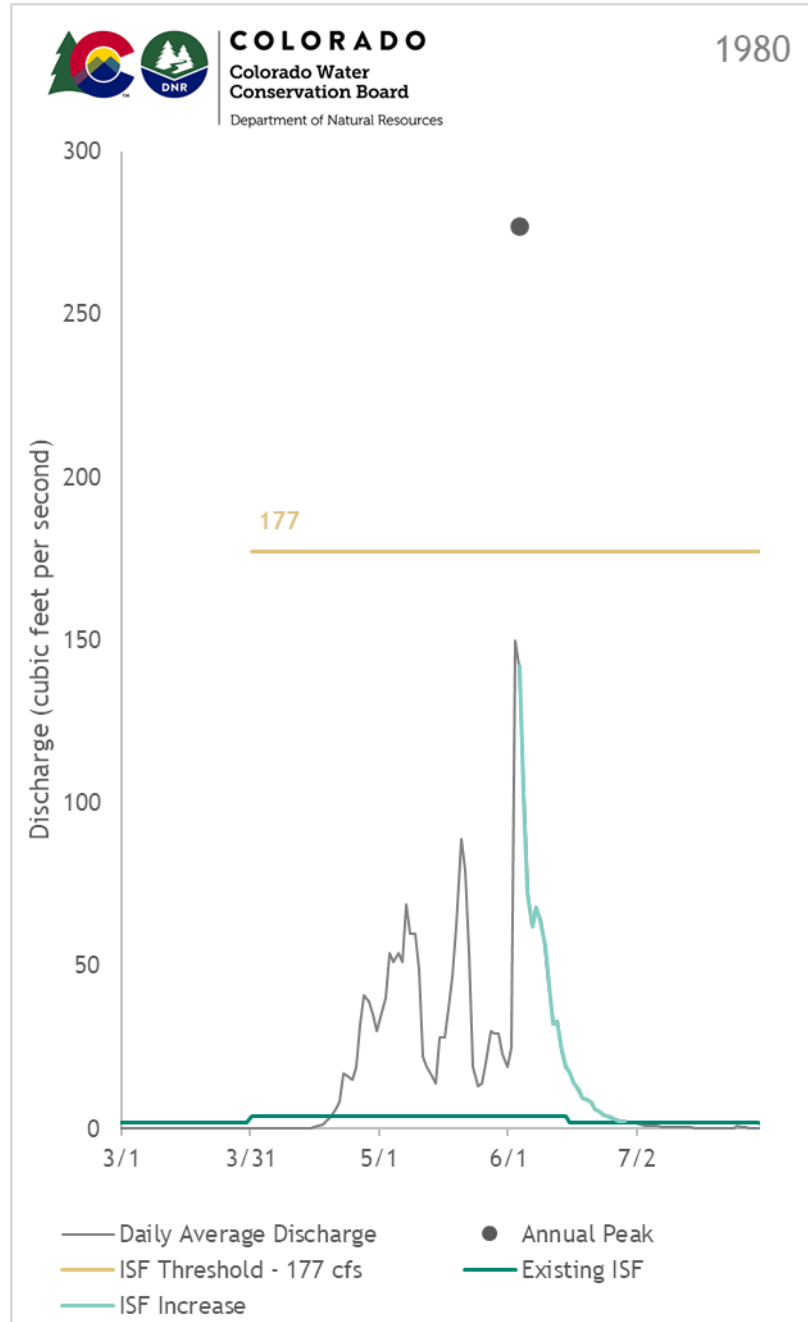

CPW POTTER CREEK GAGE COMPLETE HYDROGRAPH

