

J. E. STOVER & ASSOCIATES, INC.

2352 NORTH 7TH STREET, UNIT B GRAND JUNCTION, COLORADO 81501 PHONE: (970) 245-4101, FAX: (970) 242-7908

MINE ENGINEERING CIVIL ENGINEERING
MINE RECLAMATION CONST. MANAGEMENT

August 18, 2020

Rob Zuber
Division of Reclamation, Mining and Safety
1313 Sherman Street, Room 215
Denver, CO 80203

Re: 2019 Annual Hydrology Report

Adequacy Review #1

Bowie Resources, LLC, Bowie No. 2 Mine

Permit No. C-1996-083

Dear Mr. Zuber:

On behalf of Bowie Resources, LLC, below are the responses to DRMS' adequacy review letter dated August 10, 2020;

1. **DRMS:** It appears that requirements were not met for frequency of sampling at the two surface water sites. Table 2 in the AHR lists the frequency of measuring laboratory data as quarterly, and this agrees with page 119 of the PAP. If that is correct, BRL is not performing these analyses as often as required for SW-05 and SW-06. Furthermore, for SW-06 (Figure 18), only three quarters of data are listed for 2019, and no laboratory data is recorded. Please explain

BRL: Other than the first quarter, the 2019 water year overall was very dry and water was not available to obtain a sample for each required quarter. The **AHR text portion** of the report has been revised with additional detail about the flows listed for SW-05 and SW-06. For SW-05, lab data was obtained on May 8, but inadvertently listed for the March 28, 2019 sample date, and there was not enough water to obtain a sample for the March sampling date. Please see revised **Figure 16** (SW-05). A laboratory sample was obtained for SW-06 but inadvertently left off of excel spreadsheet. Please see revised **Figure 18** (SW-06).

2. <u>DRMS:</u> Regarding wells and springs, it is not clear why there are fewer than four quarters of data for some sites (e.g. S1010 and S1404), yet the sampling plan indicates that sampling be done quarterly. Please explain.

BRL: Page 4 of the AHR states in the third sentence of the "Surface Water Monitoring Stations – SPRINGS" that S1010 was dry during the reporting period. For S1404, the site was not accessible during the first quarter due to snow, and the other three quarters show either a flow, damp, or no visible flow.

On Table 1, in the comments section it is stated "no winter monitoring/access" for Springs, Spring & Ponds and Surface water monitoring locations. So, if the site is inaccessible, no samples/monitoring are required. However, if the site is accessible, the Operator will get field parameters and try to obtain a sample for laboratory testing. Only sites MW-1, 2, 3 & SW-05 were accessible during the 1Q of 2019, there was either too much snow or other inclement weather conditions to prevent access the other monitoring locations.

Going forward on each Table it will be noted if a site was not accessible due to snow or other inclement weather conditions.

Sincerely,

Tamme Bishop


Tamme Bishop, P.E. Project Engineer

2019 ANNUAL HYDROLOGIC REPORT



BOWIE RESOURCES, LLC
BOWIE NO. 1 MINE
P.O. BOX 483
PAONIA, COLORADO 81428
PERMIT C-1981-038

PREPARED BY:

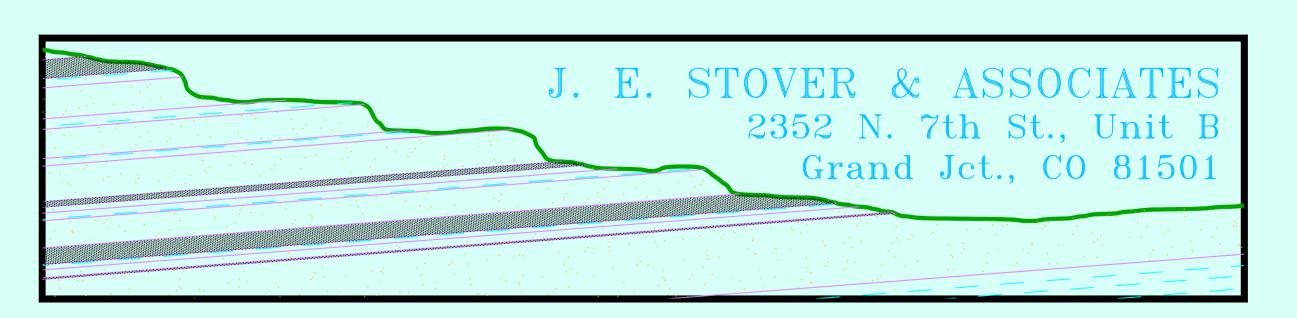

Bowie Resources, LLC Bowie No. 1 Mine 2019 Annual Report Table of Contents

Annual Hydrology Report


| Narrative | |
|---|-----------|
| Introduction | 1 |
| OVEM Groundwater Monitoring Wells | 2 |
| OVWM Groundwater Monitoring Wells | |
| North Fork Alluvium Groundwater Monitoring Wells | |
| East Roatcap Creek Colluvium Groundwater Monitoring Wells | |
| Steven's Gulch Colluvium Groundwater Monitoring Wells | |
| Surface Water Monitoring Stations-SPRINGS | |
| Surface Water Monitoring Stations-STREAMS & DITCHES | |
| Surface Water Monitoring Stations-SMALL AREA EXEMPTIONS | |
| Coal Member of Mesaverde | |
| Surface Water Monitoring Stations-PONDS | 3 |
| CDPS Monitoring Points | |
| Conclusion | |
| | |
| Table 1 - Summary of Hydrology Monitoring Stations | T1-1 |
| Table 2 - Parameter Lists | |
| Table 3 - Precipitation Values | |
| Table 4 - Undermined Point | |
| Table 5 - Angle of Draw Points | |
| Table 6 - Monitoring Point Reports - Table of Contents | |
| , and g | |
| Monitoring Point Figures and ChartsFigu | ıres 1-23 |
| g. cant iga co and charteninininininininininininininining | |
| | |
| Annual Mine Inflow Report | |
| | |
| Narrative | 1 |
| | |
| | |
| Annual Subsidence Report | |
| F | |
| Narrative | 1 |
| | |
| Maps | |
| 4-1 Hydrologic Reconnaissance, Springs, Ponds, Drill Holes and Stream | Gauges |
| 8-1 Reclamation Map | |
| 8-3 Coal Storage and Loadout Area | |

2019 ANNUAL HYDROLOGIC REPORT



BOWIE RESOURCES, LLC
BOWIE NO. 1 MINE
P.O. BOX 483
PAONIA, COLORADO 81428
PERMIT C-1981-038

PREPARED BY:

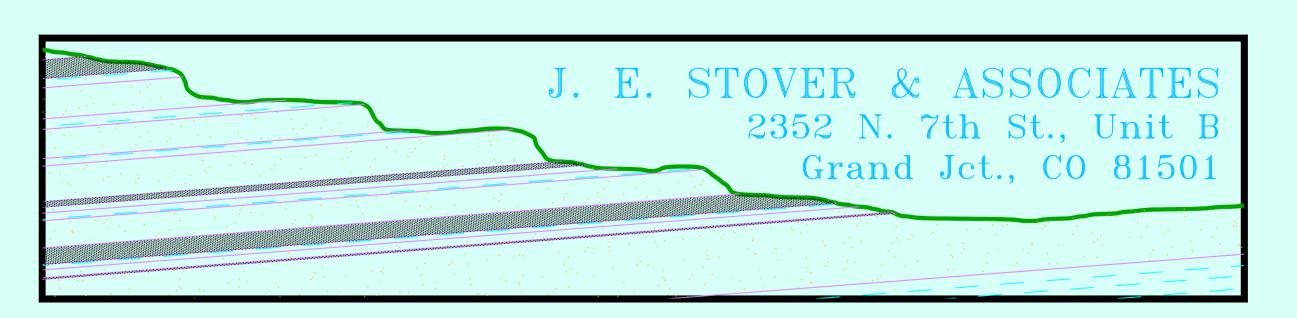

ANNUAL HYDROLOGY REPORT

<u>2019</u>

Revised August 2020

Bowie No. 1 Mine

Bowie Resources, LLC

Paonia, Colorado

Introduction

Bowie Resources Limited acquired the Orchard Valley Mine from the Cyprus Orchard Valley Coal Corporation in December 1994. Bowie Resources Limited was acquired by Bowie Resources, LLC in December 2003. The underground coal mine (renamed the Bowie No. 1 Mine) is approximately two miles north of Paonia, Colorado. The Bowie No. 1 East Mine has not operated since it was sealed in June 1986, following a mine fire. The areal extent of the East Mine workings was 1,156 acres at that time. During July 1993, rehabilitation efforts at the portal area of the East mine were completed and the mine workings of the East and West mines were connected. Only the first fifteen crosscuts of the East mine were reopened with the rest of the mine remaining sealed and inactive. Mining ceased at the Bowie No. 1 Mine on December 4, 1997.

The coal mined from both the East and West mine is in the "**B**" seam of the Mesaverde Coal Member. Hydrologic monitoring began at the mine in 1983. The area affected by mining was reduced to 2,714 acres with the approval of permit revision no. 4 since some of the East mine workings are incorporated into the Bowie No. 2 Mine permit boundary. This report presents monitoring results from the 2019 monitoring season.

The Bowie No. 1 Mine has been idle for more than 20 complete monitoring seasons (1998 - 2019). Several monitoring points are no longer available for monitoring due to a mechanical collapse of drill holes. Bowie No. 1 received permission through a revision to the permit document (TR-34) to eliminate these holes from the monitoring schedule.

The approval of permit revision no. 4 transferred a number of monitoring points from the Bowie No. 1 Mine to the Bowie No. 2 Mine. Terror Creek Monitoring stations SW-1, SW-2, SW-4 and SW-10 were transferred. Stevens Gulch ponds 81, 7-2, 7-7, 7-11, 12-1, 12-2, 12-9, 12-10, 12-11, 18-4, 82, 1-4 and 1-6 were transferred. Terror Creek ponds 1-11, 6-2, 6-5, and 8-4 were transferred. Coal Gulch ponds 17-1, 18-1 and 83 were transferred. Stevens Gulch Springs 19, 23, 7-4, 7-5 and 12-4 were transferred. Terror Creek Springs 16, 17, 18, 20, 21, 22, 1-3, 1-5, 5-1, 6-1, 6-4, 6-6, 7-1, 7-9, 7-10 and 8-5 were transferred. Groundwater monitoring wells CWI DH-58 and DH-60 were also transferred. All of the stations transferred except SW-10 and spring 20 were inactive monitoring points for the Bowie No. 1 mine

The following 2019 Annual Hydrology Report narrative is divided into ten parts. Discussion is presented by each monitoring category identified in Table 1 - Summary of Hydrologic Monitoring Stations - Required Monitoring for Annual Hydrology Report.

Table 1 (immediately following this narrative) defines the monitoring points by type and sample frequency, field parameter sampling schedule. Several monitoring points have been removed from the surveillance schedule and are noted on this table as such. B04 was removed as a monitoring point by technical revision number 55. Twenty-four monitoring points were permanently suspended with the approval of TR-61 (approved September 1, 2016), those points are shown on Table 1.

Table 2 contains a listing of the laboratory parameters for surface and ground water to be tested in accordance with the mining permit application. Laboratory analyses are performed by SGS Accutest Mountain States, 4036 Youngfield St., Wheat Ridge, CO 80033-3862 or by Enviro-Chem Analytical, Inc., 2493 Hwy 6 & 50, Unit 7, Grand Junction, CO 81505.

Table 3 contains local precipitation data. This data is available from the internet at www.wrcc.dri.edu/summary/Climsmco.html select Paonia 1 SW (056306), however, data is no longer being recorded at that site. The average precipitation for the period of record (1893 through 2016) was 15.39 inches. No

Precipitation data was collected during 2019. Data recorded at the Bowie no. 2 mine site through September 19, 2019 is 4.51 inches, and that number does not necessarily reflect the total snowfall received at the mine, which was not a lot during the 2019 water year.

Table 4 contains a listing of all monitoring points that have been undermined by the Bowie No. 1 Mine, the date of mining, and the panel or section that undermined them.

Table 5 contains a listing of all monitoring points that are potentially impacted by the angle of draw of the underground workings of the Bowie No. 1 Mine. Since the mine has been reclaimed, no prediction of potential monitoring point impacts is presented.

Table 6 contains a listing of all actively monitored points, with descriptions of their locations and a reference to the Monitoring Point Figure that contains this year's monitoring data.

Ponds were sampled for water quality when discharging or inflows/outflows were occurring. Ponds in the permit area are typically spring-fed or seep-fed and exhibit diffuse non-concentrated areas of inflow. Often the pond outlets present the only point of concentrated flow at which flow measurements and field parameters can be obtained. Where possible, quality measurements are obtained at the pond inlet. Stagnant water in ponds is not sampled since water quality results would show the effects of evaporation and stock use and could not be used to evaluate potential mine affects. The six remaining ponds at the East Mine were reclaimed during the fall of 2019.

This report includes data collected specifically to meet requirements of the Division of Reclamation, Mining and Safety (DRMS). At the request of the DRMS, minimum, maximum and average baseline data are now presented on each monitoring point listing as well as minimum, maximum and average values for the operational period of the monitoring point and baseline periods where applicable. The baseline values are taken from all recorded sampling events until affected by the mining operation, with operational values reflecting the period following the baseline period.

OVEM Groundwater Monitoring Wells:

Wells B05, B06 and B08 were removed from the monitoring schedule by TR-61 and will no longer be monitored. Groundwater monitoring wells B01, B02, and B04 are near the East Mine facilities (see Map No. 8-1). Well B01 was destroyed by a dozer doing maintenance work during 2002 so it is no longer monitored. Well B02 was destroyed by a dozer doing reclamation work during 2008 so it is no longer monitored. Well B03 is blocked and can no longer be monitored for field parameters or water quality. It was removed from the sampling regime by TR-34. Well B04 was destroyed by construction activities late in 2012. Well B04 was removed from the monitoring schedule by TR-55. Borehole B-7, also referred to as Node 22, is located below sedimentation pond #4 and is periodically monitored for water quality to ascertain potential groundwater contamination attributable to the East Mine facilities area. Water level in B07 was lower than normal range so there wasn't enough water to obtain a sample.

OVWM Groundwater Monitoring Wells:

One piezometer (OVWM) was installed in the fill at the Orchard Valley West Mine. This well was destroyed during mine reclamation so it is no longer monitored.

North Fork Alluvium Groundwater Monitoring Wells:

Three (3) wells, MW-1, MW-2 and MW-3 (see Map No. 8-3) are completed in the North Fork of the Gunnison alluvium. During the year, the wells were monitored quarterly for water levels and showed typical seasonal

fluctuations within previously established ranges. MW-1 and MW-3 were monitored quarterly for quality during the year, if water was available, to monitor potential groundwater effects stemming from the coal stockpile and load out facilities in the North Fork Valley. Well MW-3 is southwest of the coal stockpile area in a location that should see the full impact of any potential groundwater degradation. The 2019 data continues to show that the stockpile and load-out are not degrading the water in the alluvium.

East Roatcap Creek Colluvium Groundwater Monitoring Wells:

Wells SM-05, 06, 07,10 and 11 were permanently suspended with the approval of TR-61 and will no longer be part of the monitoring program.

Steven's Gulch Colluvium Groundwater Monitoring Wells:

The wells (SM-1 and SM-9) have been permanently suspended with the approval of TR-61 and will no longer be part of the monitoring program.

Surface Water Monitoring Stations - SPRINGS

East Roatcap Creek - Two springs were monitored in the East Roatcap Creek drainage (refer to Table 1 and Map No. 4-1) during the year. Spring 30 had flow during May and was dry the remainder of the year. Spring 30 was first undermined in April 1983. Spring 10-10 was dry all three quarters. Spring 10-10 was encompassed by the angle-of-draw of Panel Y during October 1993. Subsidence impacts were not apparent at either of these locations during 2019.

West Roatcap Creek - Spring 32 has been permanently suspended with the approval of TR-61 and will no longer be part of the monitoring program. Two springs were monitored in the West Roatcap Creek drainage (refer to Table 1 and Map No. 4-1) during the year. Spring 14-4 was monitored quarterly and had flow during May and June, but did not have enough water available to obtain a sample. The Spring was dry the remainder of the year. No mining occurred during the year in the Spring14-4 watershed.

Stevens Gulch - One spring was monitored within the Stevens Gulch drainage (refer to Table 1 and Map No. 4-1) during the year. Spring 25 lies below an area of the East mine inactive since 1982. This site had no measurable flows during the year. Spring 25 has been identified as an adjudicated water right within the permit area.

Two springs with ponds in the Stevens Gulch drainage, Spring and Pond 13-5, Spring and Pond 13-6 were monitored quarterly during the year. Spring and Pond 13-5 was undermined during the last half of 1992. Spring and Pond 13-6 was undermined during the end of 1988. Springs 13-5 and 13-6 were dry during the year.

Surface Water Monitoring Stations: STREAMS AND DITCHES

Overall, adverse impacts attributable to mining were not evident at any of the monitored surface water stations (refer to Table 1 and Map No. 4-1). Stations SW-5 (Stevens Gulch) had below average flow 3 of the four quarters, a sample was obtained in May, but water was not available during the third quarter. SW-6 (East Roatcap Creek) was not accessible during the 1Q, and had below average flow for the remaining three quarters and not enough water was available to obtain a sample during the second or third quarters. No evidence of subsidence impacts in these drainages was apparent. Mining occurred in the Stevens Gulch drainage upstream of site SW-5 during 1993 in Panel C. Panel C mining was designed and conducted to prevent the development of subsidence to protect the waterway and certain structures in the vicinity. Data collected during the year shows these protective measures were successful.

Surface Water Monitoring Stations: SMALL AREA EXEMPTIONS

The west side of the east mine fan level is defined as a small area exemption since drainage from this area is not conveyed to a sediment pond. One sample point is defined at this location and sampled for conformance with the NPDES discharge alternative limitations requirements associated with discharges occurring because of precipitation events of less than the 10-year and 24-hour magnitude. In these instances, settable solids and pH limitation must be met. No samples were collected during 2019 from this SAE point.

Coal Member of Mesaverde:

All previously monitored drill holes have now collapsed and are no longer monitored. The removal of these monitoring points is explained in TR-34.

Surface Water Monitoring Stations: PONDS

East Roatcap Creek - Ponds 1001, 1002, 1003, 1004, 1007, 1009, 1014, 1501, 8700, 8800 and 8900 were permanently suspended with the approval of TR-61 and will no longer be part of the monitoring program.

Stevens Gulch -. Ponds 1307 and 8500 were permanently suspended with the approval of TR-61 and will no longer be part of the monitoring program.

CDPS Monitoring Points

DMRs are submitted quarterly to the Colorado Department of Public Health and Environment with copies to the Division of Reclamation, Mining and Safety and are included herein by reference.

Conclusion

Hydrologic monitoring was extended into the northern portion of the East Roatcap Creek drainage during 1993 to fit newly acquired lease areas and revised mine plans. Mining operations were suspended during December 1997 and have not resumed. Hydrologic monitoring conducted during 2019 did not show mine related impacts to the local hydrology were occurring. Water quality remains good overall and no physical impacts have been noted at any of the monitored locations that would suggest adverse effects associated with the historical mining operations of the Bowie No. 1 Mine.

4

Summary of Hydrology Monitoring Stations

| Station | | Elevation | Depth | Frequency of I | Measurements | Report | Report | Format | |
|-----------------|------------------------------------|------------|-------|----------------|---------------|-----------|--------|--------|--|
| Number | Station Name | (ft.) | (ft.) | Field Par. | Lab. Par. | Frequency | AHR | DMR | Comments |
| OVEM Gro | undwater Monitoring Wells | | | | | | | | |
| B05 | Borehole 5 | 6883 | 32.5 | N/A | N/A | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| B06 | Borehole 6 | 6781 | 93.8 | N/A | N/A | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| B07 | Borehole 7 | 6602 | 95.3 | Semi-Annually | Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| B08 | Borehole 8 | 6790 | 38.8 | N/A | N/A | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| North Fork | Alluvium Groundwater Monitoring | Wells | | | | | | | |
| MW01 | Monitoring Well 1 | 5716 | 25 | Quarterly | Quarterly | Annually | Yes | No | Monitored for water level quarterly (Volume 7, pg 2.04-41) |
| MW02 | Monitoring Well 2 | 5737 | 41.8 | Quarterly | N/A | Annually | Yes | No | Monitored for water level quarterly (Volume 7, pg 2.04-41) |
| MW03 | Monitoring Well 3 | 5727 | 31.9 | Quarterly | Quarterly | Annually | Yes | No | Monitored for water level quarterly (Volume 7, pg 2.04-41) |
| Steven's G | ulch Colluvium Groundwater Moni | toring Wel | ls | | | | | | |
| SM01 | Monitoring Well SM-1 | 7590 | 55 | Semi-Annually | Semi-Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| SM05 | Monitoring Well SM-5 | 7520 | 40 | Semi-Annually | Semi-Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| SM06 | Monitoring Well SM-6 | 7480 | 50 | Semi-Annually | Semi-Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| SM07 | Monitoring Well SM-7 | 7800 | 55 | Semi-Annually | Semi-Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| SM09 | Monitoring Well SM-9 | 7520 | 40 | Semi-Annually | Semi-Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| SM10 | Monitoring Well SM-10 | 7250 | 48.7 | Semi-Annually | Semi-Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| SM11 | Monitoring Well SM-11 | 7243 | 46.5 | Semi-Annually | Semi-Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| Surface W | ater Monitoring Stations - SPRINGS | 3 | | | | | | | |
| S1010 | East Roatcap Creek-Spring 10-10 | 8650 | N/A | Quarterly | Annually | Annually | Yes | No | No winter monitoring/access |
| S1404 | West Roatcap Creek-Spring 14-4 | 7480 | N/A | Quarterly | Annually | Annually | Yes | No | No winter monitoring/access |
| S2500 | Steven's Gulch-Spring 25 | 7160 | N/A | Quarterly | Annually | Annually | Yes | No | No winter monitoring/access |
| S3000 | East Roatcap Creek-Spring 30 | 7840 | N/A | Quarterly | Annually | Annually | Yes | No | No winter monitoring/access |
| S3200 | West Roatcap Creek-Spring 32 | 7900 | N/A | Monthly | Quarterly | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |

Summary of Hydrology Monitoring Stations (Continued)

| Station | | Elevation | Depth | Frequency of I | Measurements | Report | Report | Format | |
|-----------|------------------------------------|------------|-------|----------------|--------------|-----------|--------|--------|---|
| Number | Station Name | (ft.) | (ft.) | Field Par. | Lab. Par. | Frequency | AHR | DMR | Comments |
| Surface W | ater Monitoring Stations - STREAMS | S AND DITO | CHES | | | | | | |
| SW05 | Steven's Gulch | 6600 | N/A | Quarterly | Quarterly | Annually | Yes | No | No winter monitoring/access |
| SW06 | East Roatcap Creek-Downstream | 6740 | N/A | Quarterly | Quarterly | Annually | Yes | No | No winter monitoring/access |
| Surface W | ater Monitoring Stations - PONDS | | | | | | | | |
| P1001 | East Roatcap Creek-Pond 10-1 | 8520 | 5 | Quarterly | Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| P1002 | East Roatcap Creek-Pond 10-2 | 8630 | 3 | Quarterly | Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| P1003 | East Roatcap Creek-Pond 10-3 | 8680 | 3 | Quarterly | Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| P1004 | East Roatcap Creek-Pond 10-4 | 8780 | 3 | Quarterly | Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| P1007 | East Roatcap Creek-Pond 10-7 | 8350 | 4 | Quarterly | Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| P1009 | East Roatcap Creek-Pond 10-9 | 8395 | 3 | Quarterly | Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| P1014 | East Roatcap Creek-Pond 10-14 | 8795 | 3 | Quarterly | Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| P1307 | Steven's Gulch-Pond 13-7 | 8875 | 5 | Quarterly | Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| P1501 | East Roatcap Creek-Pond 15-1 | 8055 | 4 | Quarterly | Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| P8500 | Steven's Gulch-Pond 85 | 7580 | 4 | Quarterly | Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| P8700 | East Roatcap Creek-Pond 87 | 7990 | 4 | Quarterly | Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| P8800 | East Roatcap Creek-Pond 88 | 7790 | 5 | Quarterly | Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| P8900 | East Roatcap Creek-Pond 89 | 7490 | 4.5 | Quarterly | Annually | Annually | Yes | No | PERMANENTLY SUSPENDED (TR-61) |
| Surface W | ater Monitoring Stations - SPRINGS | WITH PON | DS | | | | | | |
| SP1305 | Steven's Gulch-Spring & Pond 13-5 | 7860 | 4 | Quarterly | Annually | Annually | Yes | No | Monitor if spring is discharging. No winter monitoring/access |
| SP1306 | Steven's Gulch-Spring & Pond 13-6 | 7590 | 4 | Quarterly | Annually | Annually | Yes | No | Monitor if spring is discharging. No winter monitoring/access |

PARAMETER LISTS

LAB PARAMETERS

| Wet Chemistry |
|--|
| Alkalinity as CaCO (mg/l) |
| Bicarbonate as CaCO (mg/l) |
| Carbonate as CaCO (mg/l) |
| Chloride (mg/l) |
| Conductivity (umhos/cm) |
| pH (Lab Units) |
| Hardness as CaCO (mg/l) |
| Residue, Filterable (TDS) @ 180 C (mg/l) |
| Residue, NonFilterable (TSS) (mg/l) |
| Sodium Absorption Ratio in Water |
| Sulfate (mg/l) |
| Acidity (mg/l) |


| Metals |
|-----------------------------|
| Calcium, dissolved (mg/l) |
| Magnesium, dissolved (mg/l) |
| Sodium, dissolved (mg/l) |
| Iron, dissolved (mg/l) |
| Iron, total (mg/l) |
| Manganese, total (mg/l) |

FIELD PARAMETERS

| Parameter | Unit | Wells | Ponds | Streams | Springs |
|--------------|----------|-------|-------|---------|---------|
| | | | | | |
| Conductivity | umhos/cm | Yes | Yes | Yes | Yes |
| Flow Rate | CFS | No | No | Yes | Yes |
| рН | Standard | Yes | Yes | Yes | Yes |
| Temperature | С | Yes | Yes | Yes | Yes |
| Water Level | Feet | Yes | Yes | No | No |

Monthly Precipitation Values

| Month | 1998 | 1999 | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 | 2013 | 2014 | 2015 | 2016 |
|-----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| January | 1.13 | 1.08 | 1.93 | 0.73 | 0.55 | 0.26 | 1.31 | 2.05 | 0.81 | 0.68 | 1.67 | 0.91 | 0.42 | 0.49 | 1.22 | 1.73 | 0.66 | 1.02 | 0.9 |
| February | 0.83 | 0.38 | 1.27 | 1.06 | 0.11 | 1.35 | 1.46 | 1.38 | 0.28 | 0.92 | 1.1 | 1.00 | 1.66 | 0.87 | 1.41 | 0.89 | 2.16 | 1.00 | 0.85 |
| March | 1.43 | 0.42 | 1.03 | 0.42 | 1.03 | 1.17 | 0.14 | 1.93 | 1.58 | 1.39 | 0.54 | 0.89 | 1.2 | 1.22 | 0.3 | 1.14 | 0.77 | 0.76 | 0.3 |
| April | 1.43 | 2.54 | 0.42 | 0.57 | 0.61 | 0.49 | 3.3 | 1.37 | 0.83 | 1.2 | 0.77 | 1.09 | 0.51 | 1.68 | 0.62 | 1.3 | 1.31 | 1.75 | 1.21 * |
| May | 0.16 | 1.00 | 0.67 | 1.75 | 0.28 | 1.81 | 0 | 1.22 | 0.17 | 1.18 | 0.64 | 2.73 | 1.68 | 0.83 | 0.09 | 1.24 | 1.71 | 3.86 | 1.33 |
| June | 0.47 | 0.94 | 0.86 | 0.39 | 0.04 | 0.48 | 0.34 | 1.64 | 0.5 | 0.99 | 0.67 | 0.63 | 0.55 | 0.32 | 0.05 | 0 | 0.21 | 1.05 | 0.51 |
| July | 0.66 | 2.7 | 0.89 | 1.31 | 0.28 | 0.76 | 0.02 | 0.4 | 3.06 | 0.85 | 0.24 | 0.27 | 1.44 | 1.74 | 1.26 | 1.32 | 1.11 | 2.43 | 0.8 |
| August | 1.18 | 1.42 | 1.27 | 2.35 | 0.66 | 0.46 | 0.48 | 1.71 | 0.87 | 1.16 | 2.07 | 0.33 | 2.09 | 0.46 | 2.35 | 0.78 | 2.13 | 1.96 | 1.81 |
| September | 0.75 | 1.16 | 1.27 | 0.34 | 2.43 | 1.93 | 2.85 | 2.84 | 2.32 | 3.2 | 0.62 | 0.32 | 1.15 | 1.2 | 0.92 | 3.28 | 2.96 | 1.20 | 1.07 |
| October | 1.88 | 0.05 | 0.75 | 0.84 | 2.53 | 0.46 | 1.37 | 2.11 | 5.08 | 1.37 | 0.74 | 0.58 | 1.84 | 1.55 | 0.64 | 2.12 | 1.17 | 1.94 | 0.49 |
| November | 1.87 | 0.07 | 0.73 | 1.85 | 0.9 | 1.74 | 1.72 | 0.84 | 1.39 | 0 | 0.91 | 0.77 | 0.58 | 0.96 | 0.61 | 0.90 | 0.65 | 1.48 | 0.16 |
| December | 1.00 | 0.57 | 0.78 | 0.99 | 0.71 | 1.03 | 1.26 | 1.47 | 0.65 | 4.20 | 1.55 | 1.36 | 1.91 | 1.01 | 1.41 | 0.69 | 1.56 | 2.70 | 2.18 |
| | | | | | | | | | | | | | | | | | | | |
| Minimum | 0.16 | 0.05 | 0.42 | 0.34 | 0.04 | 0.26 | 0 | 0.4 | 0.17 | 0 | 0.24 | 0.27 | 0.42 | 0.32 | 0.05 | 0.00 | 0.21 | 0.76 | 0.16 |
| Average | 1.07 | 1.03 | 0.99 | 1.05 | 0.84 | 1.00 | 1.19 | 1.58 | 1.46 | 1.43 | 0.96 | 0.91 | 1.25 | 1.03 | 0.91 | 1.28 | 1.37 | 1.76 | 0.97 |
| Maximum | 1.88 | 2.7 | 1.93 | 2.35 | 2.53 | 1.93 | 3.3 | 2.84 | 5.08 | 4.2 | 2.07 | 2.73 | 2.09 | 1.74 | 2.35 | 3.28 | 2.96 | 3.86 | 2.18 |
| Total | 12.79 | 12.33 | 11.87 | 12.60 | 10.13 | 11.94 | 14.25 | 18.96 | 17.54 | 17.14 | 11.52 | 10.88 | 15.03 | 12.33 | 10.88 | 15.39 | 16.40 | 21.15 | 11.61 |

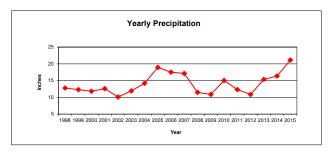

This data is obtained from the internet at www.wrcc.dri.edu/summary/Climsmco.htm leect Paonia 1 SW (056306).

^{* 26} or more days missing from data, therefore deemed not complete. 0.97 is the average of years 1998-2016
** No data recorded during the 2017-2019 water years

Undermined Monitoring Points Previously Mined Areas

| ID | Panel | Advance | Advance Date | Retreat | Retreat Date | Overburden | Begin Monitoring | End Monitoring |
|--------|------------------|---------|-----------------|---------|-----------------|------------|---------------------|-------------------|
| | | | | | | | Date | Date |
| DUISON | 4.147 | | 40/4/4005 | | 4/4/4000 | 1000 | 4/4/4000 | 4/4/4000 |
| DH580 | 1 West | X | 12/1/1995 | | 1/1/1986 | 1600 | 1/1/1983 | 4/1/1992 |
| DH600 | Panel H | X | 1/1/1990 | Х | 1/1/1990 | 1100 | 7/1/1983 | 11/1/1998 |
| DH700 | 8 North | Χ | 2/1/1984 | | | 700 | 1/1/1983 | 11/26/2006 |
| P0707 | 1 North | Χ | 10/1/1983 | | 2/1/1985 | 1500 | 7/1/1983 | 4/1/1992 |
| P0711 | 1 North | Χ | 10/1/1983 | Χ | 2/1/1985 | 1500 | 10/1/1983 | 4/1/1992 |
| P1004 | 1 West | X | 11/1/1993 | | | 2050 | 10/1/1991 | Note 3 |
| P1014 | 1 West | Х | 1/1/1994 | | | 2200 | 10/1/1991 | Note 3 |
| P1202 | N. Mains | Х | 1/1/1984 | | | 1300 | 7/1/1983 | 10/1/1997 |
| P1401 | III West Mains | Х | 10/1/1997 | Χ | 10/1/1997 | 950 | 6/1/1992 | 11/10/2006 |
| P1404 | II South | Х | 6/1/1987 | | | 400 | 6/1/1992 | Unknown |
| P1701 | 8 North | Х | 1/1/1984 | | | 350 | 8/1/1983 | 5/4/1990 |
| P1804 | N. Mains | Х | 9/1/1982 | | | 1450 | 7/1/1983 | Note 2 |
| P1901 | 2 South | Х | 12/1/1982 | Χ | 1/1/1983 | 100 | 7/1/1983 | 4/1/1992 |
| P2401 | 2 1/2 West | Х | 5/1/1983 | Χ | 9/1/1983 | 650 | 7/1/1985 | 4/1/1992 |
| P8100 | 9E | Х | 5/1/1983 | | | 1700 | 6/1/1983 | 4/1/1992 |
| P8300 | 5 North | Х | 6/1/1984 | | | 900 | 1/1/1983 | 10/5/1990 |
| P8500 | Panel B | Х | 12/1/1992 | Х | 12/1/1992 | 650 | 2/1/1983 | Note 3 |
| P8700 | 2 1/2 Right | Х | 10/1/1995 | Χ | 10/1/1995 | 1250 | 6/1/1983 | Note 3 |
| S3000 | Panel Y | Х | 4/1/1983 | Х | 10/1/1997 | 900 | 5/1/1983 | Note 1 |
| SP1105 | 1 North | Х | 2/1/1996 | | | 1700 | Unknown | Unknown |
| SP1502 | II West Submains | Х | 2/1/1992 | | | 700 | 6/1/1992 | Unknown |
| SP2300 | 1 East Mains | Х | 7/1/1984 | | | 1650 | 6/1/1983 | Note 2 |
| SW08 | Farmer's Mine | Х | | | | 0 | 2/1/1983 | 10/5/1990 |
| | | | | | | | | |

Note 1 Currently Monitored

Note 2 Transferred to the Bowie No. 2 Mine

Note 3 Permanently suspened with TR-61, July 22, 2016

Angle of Draw Monitoring Points Previously Mined Areas

| ID | Panel | Advance | Advance Date | Retreat | Retreat Date | Overburden | Begin Monitoring | End Monitoring |
|--------|------------------|---------|-----------------|---------|-----------------|------------|---------------------|-------------------|
| | | | | | | | Date | Date |
| DH650 | 1 East Mains | Х | 4/1/1994 | | | 1350 | 7/1/1993 | 8/1/1996 |
| P1001 | Panel Z | X | 2/1/1994 | Х | 9/1/1994 | 1600 | 10/1/1991 | Note3 |
| P1002 | Panel Y | Х | 10/1/1993 | | | 1800 | 10/1/1991 | Note3 |
| P1003 | Panel Y | Х | 11/1/1993 | | | 1950 | 10/1/1991 | Note3 |
| P1007 | 2 Right | Х | 2/1/1996 | | | 1500 | 10/1/1991 | Note3 |
| P1009 | 2 1/2 Right | Х | 9/1/1995 | | | 1650 | 10/1/1992 | Note3 |
| P1307 | Panel A+ | Х | 4/1/1992 | Χ | 4/1/1992 | 950 | 7/1/1983 | 10/11/1990 |
| P1308 | 5 East | Х | 11/1/1980 | Х | 6/1/1981 | 900 | 10/1/1983 | 4/1/1992 |
| P1402 | Panel I | Х | 10/1/1997 | Х | 10/1/1997 | 1100 | 6/1/1992 | 11/10/2006 |
| P1501 | 1 East Mains | Х | 8/1/1994 | Х | 8/1/1984 | 1150 | 6/1/1992 | Note 1 |
| P8800 | III West Mains | Х | 10/1/1997 | Х | 10/1/1997 | 850 | 6/1/1983 | Note3 |
| S0704 | N. Mains | Х | 3/1/1983 | | | 1400 | 7/1/1983 | 5/1/1997 |
| S0705 | N. Mains | Х | 2/1/1983 | | | 1500 | 7/1/1983 | Note 2 |
| S1010 | Panel Y | Х | 10/1/1993 | | | 1950 | 6/1/1992 | Note 1 |
| S1805 | 7 East | Х | 12/1/1981 | Х | 12/1/1981 | 250 | Unknown | Unknown |
| SM07 | III West Mains | Х | 10/1/1997 | Х | 10/1/1997 | 900 | 8/1/1985 | Note3 |
| SM09 | Panel C | Х | 2/1/1993 | Χ | 3/1/1993 | 600 | 8/1/1985 | Note3 |
| SP1305 | Panel B | Х | 12/1/1992 | Х | 12/1/1992 | 750 | 7/1/1983 | Note 1 |
| SP1306 | II West Submains | Х | 1/1/1988 | | | 600 | 1/1/1983 | Note 1 |

Note 1 Currently Monitored

Note 2 Transferred to the Bowie No. 2 Mine

Note 3 Permanently suspened with TR-61, July 22, 2016

B07 Borehole 7 Depth - 95.3' Elevation - 6602'

| Initiated | 9/1/1981 | 9/1/1981 | 9/1/1981 |
|-----------|------------|-----------|-----------|
| Activated | 9/1/1981 | 9/1/1981 | 9/1/1981 |
| Date | 10/25/2019 | 9/17/2019 | 5/13/2019 |


| | _ | Summa | ary Infor | mation | | | | | | |
|--------------------------|----------|---------|-----------|--------|--|--------|--------|--------|--------|--------|
| Field | | Baselir | ie | | Operation | on | | | | |
| Parameters | UNITS | Min | Ave | Max | Min | Ave | Max | | | |
| Static Water Level | Feet | | | | 69.40 | 87.33 | 95.90 | 95.2 | 95.2 | 95.2 |
| Water Elevation | Feet | | | | 6506 | 6515 | 6533 | 6506.8 | 6506.8 | 6506.8 |
| Temperature | Celsius | | | | 7.0 | 13.7 | 19.6 | | | |
| Conductivity | umhos/cm | | | | 152 | 1345 | 2190 | | | |
| pН | su | | | | 5.8 | 7.5 | 8.9 | | | |
| Field Comments | | | | | | | | Dry | Dry | Dry |
| Lab | | | | | | | | | | |
| Parameters | UNITS | | | | | | | | | |
| Bicarbonate | mg/L | | | | 226.00 | 423.3 | 601.0 | | | |
| Carbonate | mg/L | | | | <mdl< td=""><td>0.3</td><td>7</td><td></td><td></td><td></td></mdl<> | 0.3 | 7 | | | |
| Chloride | mg/L | | | | 21.80 | 80.36 | 420.00 | | | |
| Conductivity | umhos/cm | | | | 600 | 1390 | 2190 | | | |
| Hardness | mg/L | | | | 237.0 | 670.4 | 1170.5 | | | |
| Acidity | mg/L | | | | 20.0 | 23.7 | 27.0 | | | |
| pН | su | | | | 6.9 | 7.6 | 8.4 | | | |
| ResidueFilterable-TDS | mg/L | | | | 244 | 977 | 1900 | | | |
| ResidueNonFilterable-TSS | mg/L | | | | <mdl< td=""><td>219</td><td>824</td><td></td><td></td><td></td></mdl<> | 219 | 824 | | | |
| SAR | | | | | 0.62 | 1.33 | 2.96 | | | |
| Sulfate | mg/L | | | | 2.41 | 325.14 | 731.00 | | | |
| Calcium (Dissolved) | mg/L | | | | 1.9 | 141.3 | 269.0 | | | |
| Iron (Dissolved) | mg/L | | | | 0.02 | 0.06 | 0.12 | | | |
| Iron (Total) | mg/L | | | | 1.02 | 10.19 | 18.64 | _ | | |
| Magnesium (Dissolved) | mg/L | | | | 23.0 | 73.5 | 171.0 | | | |
| Manganese (Total) | mg/L | | | | <mdl< td=""><td>0.574</td><td>0.763</td><td></td><td></td><td></td></mdl<> | 0.574 | 0.763 | | | |
| Sodium (Dissolved) | mg/L | | | | 22.0 | 86.7 | 408.0 | _ | | |
| TDS Ratio (grav./calc.) | % | | | | 0.56 | 0.98 | 1.15 | | | |

The area of concern for monitoring point B07 was affected by the mining operation before its establishment. Therefore, all recorded monitoring events are considered Operational.

Borehole B-7, also referred to as Node 22, is located below sedimentation pond #4 and is periodically monitored for water quality to ascertain potential groundwater contamination attributable to the East Mine facilities area.

^{*}Not Enough Water for Parameters

Plot of Conductivity and Water Level

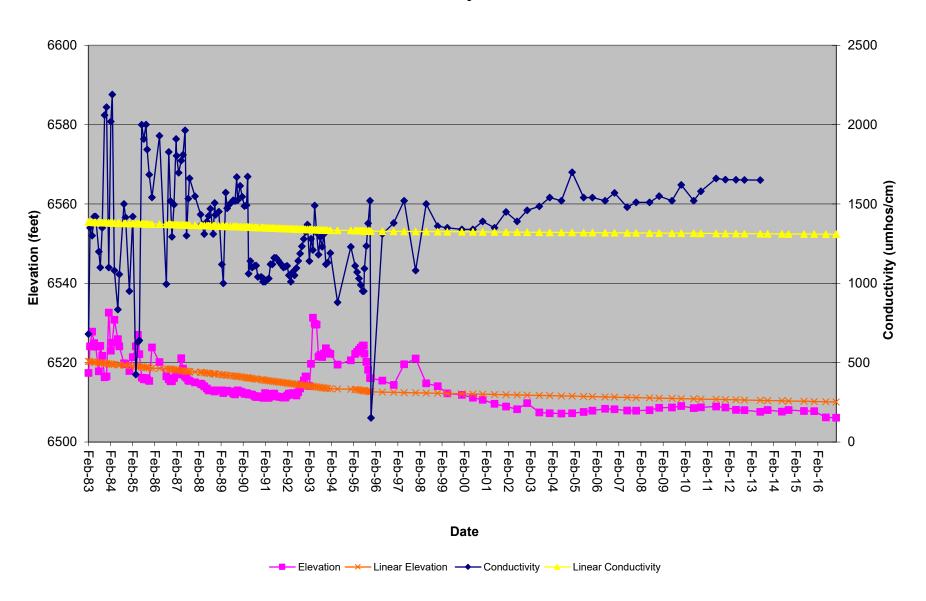

MW01 Monitoring Well 1 Depth - 25' Elevation - 5716.15'


| | | | | | | Initiated | | 9/1/1982 | 9/1/1982 | 9/1/1982 | 9/1/1982 |
|--------------------------|----------|---------|------------|--------|---|-----------|--------|------------|-----------|-----------|---------------------|
| | | | | | | Activate | d | 9/1/1982 | 9/1/1982 | 9/1/1982 | 9/1/1982 |
| | | | | | | Date | | 10/28/2019 | 9/17/2019 | 5/13/2019 | 3/25/2019 |
| | _ | Summa | ary Inform | mation | | | | | | | |
| Field | | Baselir | ie | | Operation | on | | | | | |
| Parameters | UNITS | Min | Ave | Max | Min | Ave | Max | | | | |
| Static Water Level | Feet | | | | 4.95 | 12.79 | 25.00 | 15.1 | 13.7 | 11.4 | 14.7 |
| Water Elevation | Feet | | | | 5691.1 | 5703.4 | 5711.2 | 5701.05 | 5702.45 | 5704.75 | 5701.45 |
| Temperature | Celsius | | | | 7.4 | 13.0 | 18.5 | 14.3 | 17.3 | 13 | 11 |
| Conductivity | umhos/cm | | | | 220 | 749 | 1820 | 510 | 455 | 934 | 682 |
| pH | su | | | | 6.3 | 7.7 | 8.4 | 8.21 | 7.82 | 7.73 | 7.89 |
| Field Comments | | | | | | | | | | | |
| Lab | | | | | | | | | | | |
| Parameters | UNITS | | | | | | | | | | |
| Bicarbonate | mg/L | | | | 98.5 | 184.4 | 329.4 | | | | 228 |
| Carbonate | mg/L | | | | <mdl< td=""><td>6.7</td><td>179.0</td><td></td><td></td><td></td><td><mdl< td=""></mdl<></td></mdl<> | 6.7 | 179.0 | | | | <mdl< td=""></mdl<> |
| Chloride | mg/L | | | | <mdl< td=""><td>19.0</td><td>233.0</td><td></td><td></td><td></td><td>7</td></mdl<> | 19.0 | 233.0 | | | | 7 |
| Conductivity | umhos/cm | | | | 222 | 690 | 1850 | | | | 837 |
| Hardness | mg/L | | | | 107 | 354 | 1054 | | | | 434 |
| Acidity | mg/L | | | | <mdl< td=""><td>-65.97</td><td>49.84</td><td></td><td></td><td></td><td>-228</td></mdl<> | -65.97 | 49.84 | | | | -228 |
| pH | su | | | | 6.70 | 7.64 | 8.41 | | | | 7.66 |
| ResidueFilterable-TDS | mg/L | | | | 15 | 566 | 5122 | | | | 622 |
| ResidueNonFilterable-TSS | mg/L | | | | <mdl< td=""><td>46</td><td>540</td><td></td><td></td><td></td><td>36.9</td></mdl<> | 46 | 540 | | | | 36.9 |
| SAR | | | | | 0.25 | 0.61 | 1.97 | | | | 0.573 |
| Sulfate | mg/L | | | | 5.8 | 193.0 | 880.0 | | | | 240 |
| Calcium (Dissolved) | mg/L | | | | 1.9 | 91.9 | 273.0 | | | | 122 |
| Iron (Dissolved) | mg/L | | | | <mdl< td=""><td>0.55</td><td>10.50</td><td></td><td></td><td></td><td><mdl< td=""></mdl<></td></mdl<> | 0.55 | 10.50 | | | | <mdl< td=""></mdl<> |
| Iron (Total) | mg/L | | | | 0.02 | 0.49 | 2.35 | | | İ | 0.795 |
| Magnesium (Dissolved) | mg/L | | | | 7.20 | 27.54 | 137.10 | | | İ | 31.5 |
| Manganese (Total) | mg/L | | | | <mdl< td=""><td>0.045</td><td>0.193</td><td></td><td></td><td>İ</td><td>0.0517</td></mdl<> | 0.045 | 0.193 | | | İ | 0.0517 |
| Sodium (Dissolved) | mg/L | | İ | | 0.5 | 25.3 | 102.0 | | | | 24.8 |
| | | | • | • | | | | | | | |

The area of concern for monitoring point MW01 was affected by the mining operation before its establishment. Therefore, all recorded monitoring events are considered Operational.

Negative acidity value indicates equivalent value of alkalinity

Monitoring Wells MW-1, MW-2 and MW-3 are located at the coal stockpile/truck dump/train loadout area and were drilled during September 1982 to determine the essential hydrologic functions of the North Fork alluvial valley floor. Two of the wells, MW-2 and MW-3, have since been determined to be installed in areas which are no longer classified as alluvial valley floor. (TR-13, See Volume 7, for AVF Map)

Plot of Conductivity and Water Level

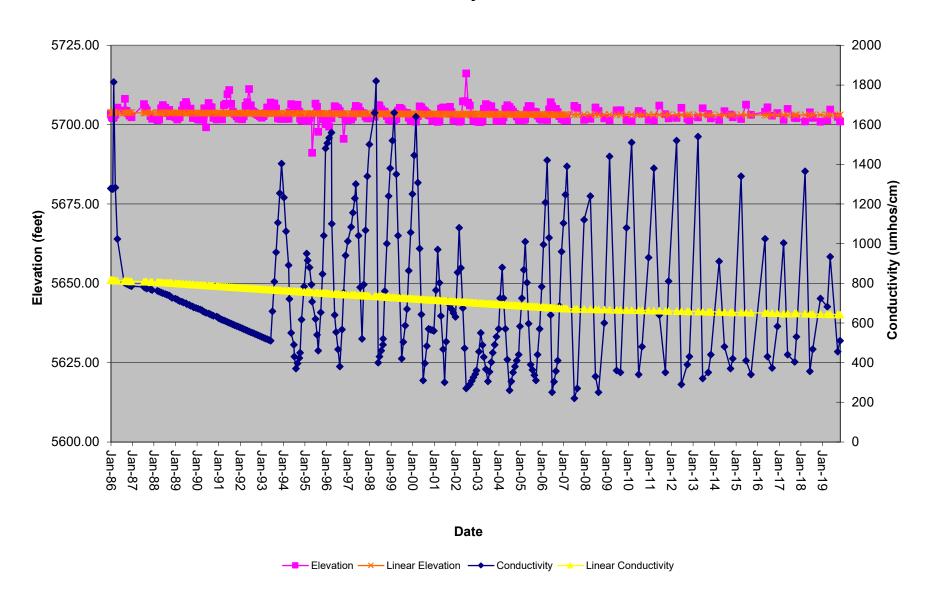


MW02 Monitoring Well 2 Depth - 41.8' Elevation - 5737.4'

| | | | | | | Initiated | | 9/1/1982 | 9/1/1982 | 9/1/1982 | 9/1/1982 |
|--------------------------|----------|---------|-----------|--------|--|-----------|--------|------------|-----------|-----------|-----------|
| | | | | | | Activate | ed . | 9/1/1982 | 9/1/1982 | 9/1/1982 | 9/1/1982 |
| | | | | | | Date | | 10/28/2019 | 9/17/2019 | 5/13/2019 | 3/25/2019 |
| | _ | Summa | ry Inform | nation | | | | | | | |
| Field | Ĭ | Baselin | е | | Operation | on | | | | | |
| Parameters | UNITS | Min | Ave | Max | Min | Ave | Max | | | | |
| Static Water Level | Feet | | | | 10.00 | 21 | 32.50 | 32.4 | 16.2 | 25.3 | 26.9 |
| Water Elevation | Feet | | | | 5704.9 | 5716.6 | 5727.4 | 5705.00 | 5721.20 | 5712.10 | 5710.50 |
| Temperature | Celsius | | | | 9.9 | 13.5 | 17.0 | | 16.1 | 14.5 | 14.2 |
| Conductivity | umhos/cm | | | | 470 | 663 | 1225 | | 735 | 675 | 675 |
| pН | su | | | | 6.7 | 7.6 | 8.3 | | 7.69 | 7.68 | 7.68 |
| Field Comments | | | | | | | | Dry | | | |
| Lab | | | | | | | | | | | |
| Parameters | UNITS | | | | | | | | | | |
| Bicarbonate | mg/L | | | | 287.00 | 301 | 314.00 | | | | |
| Carbonate | mg/L | | | | <mdl< td=""><td>305</td><td>305.00</td><td></td><td></td><td></td><td></td></mdl<> | 305 | 305.00 | | | | |
| Chloride | mg/L | | | | 4.20 | 5 | 5.80 | | | | |
| Conductivity | umhos/cm | | | | 508.00 | 572 | 623.00 | | | | |
| Hardness | mg/L | | | | 253.00 | 283 | 303.00 | | | | |
| Acidity | | | | | ###### | -289 | ###### | | | | |
| pH | su | | | | 7.52 | 8 | 8.15 | | | | |
| ResidueFilterable-TDS | mg/L | | | | 359.00 | 404 | 690.00 | | | | |
| ResidueNonFilterable-TSS | mg/L | | | | <mdl< td=""><td>20</td><td>59.20</td><td></td><td></td><td></td><td></td></mdl<> | 20 | 59.20 | | | | |
| SAR | | | | | 0.57 | 1 | 0.66 | | | | |
| Sulfate | mg/L | | | | 0.59 | 29 | 33.40 | | | | |
| Calcium (Dissolved) | mg/L | | | | 52.70 | 59 | 68.70 | | | | |
| Iron (Dissolved) | | | | | <mdl< td=""><td>30</td><td>61.30</td><td></td><td></td><td></td><td></td></mdl<> | 30 | 61.30 | | | | |
| Iron (Total) | | | | | 0.02 | 0 | 0.64 | | | | |
| Magnesium (Dissolved) | mg/L | | | | 29.50 | 34 | 39.20 | | | İ | |
| Manganese (Total) | | | | | <mdl< td=""><td>0</td><td>0.13</td><td></td><td></td><td>İ</td><td></td></mdl<> | 0 | 0.13 | | | İ | |
| Sodium (Dissolved) | mg/L | | | | 20.80 | 24 | 29.50 | | | | |

The area of concern for monitoring point MW02 was affected by the mining operation before its establishment. Therefore, all recorded monitoring events are considered Operational.

Monitoring Wells MW-1, MW-2 and MW-3 are located at the coal stockpile/truck dump/train loadout area and were drilled during September 1982 to determine the essential hydrologic functions of the North Fork alluvial valley floor. Two of the wells, MW-2 and MW-3, have since been determined to be installed in areas which are no longer classified as alluvial valley floor. (TR-13, See Volume 7, for AVF Map)

Plot of Conductivity and Water Level

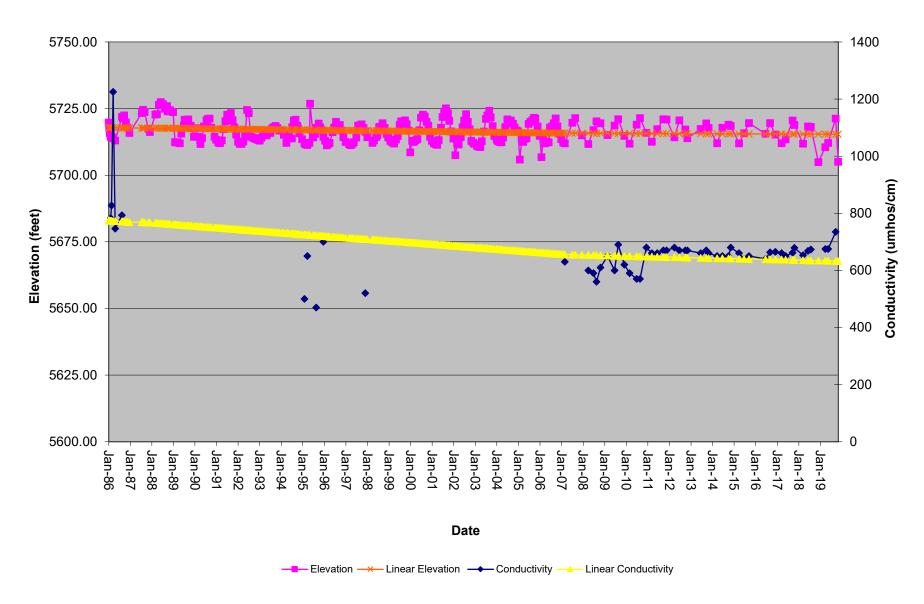

MW03 Monitoring Well 3 Depth - 31.9' Elevation - 5726.94'

| | | | | | | Initiated | | 0/4/4000 | 9/1/1982 | 0/4/4000 | 0/4/4000 |
|--------------------------|----------|---------|------------|--------|--|-----------|--------|------------|-----------|-----------|-----------|
| | | | | | | | | 9/1/1982 | | 9/1/1982 | 9/1/1982 |
| | | | | | | Activate | d | 9/1/1982 | 9/1/1982 | 9/1/1982 | 9/1/1982 |
| | | _ | | | | Date | | 10/28/2019 | 9/17/2019 | 5/13/2019 | 3/25/2019 |
| | ľ | | ary Inforr | nation | | | | | | | |
| Field | | Baselin | - | | Operation | | | | | | |
| Parameters | UNITS | Min | Ave | Max | | | Max | | | | |
| Static Water Level | Feet | | | | 4.60 | | 35.50 | 16.1 | 16.2 | 32.5 | 32.5 |
| Water Elevation | Feet | | | | 5691.4 | 5704.6 | 5726.9 | 5710.84 | 5710.74 | 5694.44 | 5694.44 |
| Temperature | Celsius | | | | 8.8 | 14.4 | 19.8 | 14.3 | 16.1 | | |
| Conductivity | umhos/cm | | | | 340 | 604 | 750 | 720 | 735 | | |
| pH | su | | | | 6.7 | 7.8 | 8.4 | 8.3 | 7.69 | | |
| Field Comments | | | | | | | | Dry | | Dry | Dry |
| Lab | | | | | | | | | | | _ |
| Parameters | UNITS | | | | | | | | | | |
| Bicarbonate | mg/L | | | | 88.8 | 309.1 | 421.0 | | | | |
| Carbonate | mg/L | | | | <mdl< td=""><td>1.3</td><td>14.0</td><td></td><td></td><td></td><td></td></mdl<> | 1.3 | 14.0 | | | | |
| Chloride | mg/L | | | | <mdl< td=""><td>32.3</td><td>303.1</td><td></td><td></td><td></td><td></td></mdl<> | 32.3 | 303.1 | | | | |
| Conductivity | umhos/cm | | | | 366 | 621 | 1440 | | | | |
| Hardness | mg/L | | | | 159.68 | 291.97 | 550.46 | | | | |
| Acidity | mg/L | | | | -334 | -97 | 39 | | | | |
| pН | su | | | | 6.9 | 7.8 | 8.6 | | | | |
| ResidueFilterable-TDS | mg/L | | | | 200 | 416 | 1046 | | | | |
| ResidueNonFilterable-TSS | mg/L | | | | <mdl< td=""><td>31</td><td>280</td><td></td><td></td><td></td><td></td></mdl<> | 31 | 280 | | | | |
| SAR | | | | | <mdl< td=""><td>0.60</td><td>1.90</td><td></td><td></td><td></td><td></td></mdl<> | 0.60 | 1.90 | | | | |
| Sulfate | mg/L | | | | <mdl< td=""><td>29.51</td><td>181.43</td><td></td><td></td><td></td><td></td></mdl<> | 29.51 | 181.43 | | | | |
| Calcium (Dissolved) | mg/L | | | | 1.9 | 41.7 | 200.0 | | | | |
| Iron (Dissolved) | mg/L | | | | <mdl< td=""><td>0.10</td><td>0.66</td><td></td><td></td><td></td><td></td></mdl<> | 0.10 | 0.66 | | | | |
| Iron (Total) | mg/L | | | | 0.01 | 0.29 | 1.07 | | | | |
| Magnesium (Dissolved) | mg/L | | | | 12.4 | 52.2 | 503.0 | | | | |
| Manganese (Total) | mg/L | | | | <mdl< td=""><td>0.070</td><td>0.235</td><td></td><td></td><td></td><td></td></mdl<> | 0.070 | 0.235 | | | | |
| Sodium (Dissolved) | mg/L | | 1 | | 9.0 | 24.8 | 92.0 | | | | |


The area of concern for monitoring point MW03 was affected by the mining operation before its establishment. Therefore, all recorded monitoring events are considered Operational.

Monitoring Wells MW-1, MW-2 and MW-3 are located at the coal stockpile/truck dump/train loadout area and were drilled during September 1982 to determine the essential hydrologic functions of the North Fork alluvial valley floor. Two of the wells, MW-2 and MW-3, have since been determined to be installed in areas which are no longer classified as alluvial valley floor. (TR-13, See Volume 7, for AVF Map)

Negative value of acidity indicates equivalent value of acidity

^{*}Not enough water for parameters - no sample.

Plot of Conductivity and Water Level

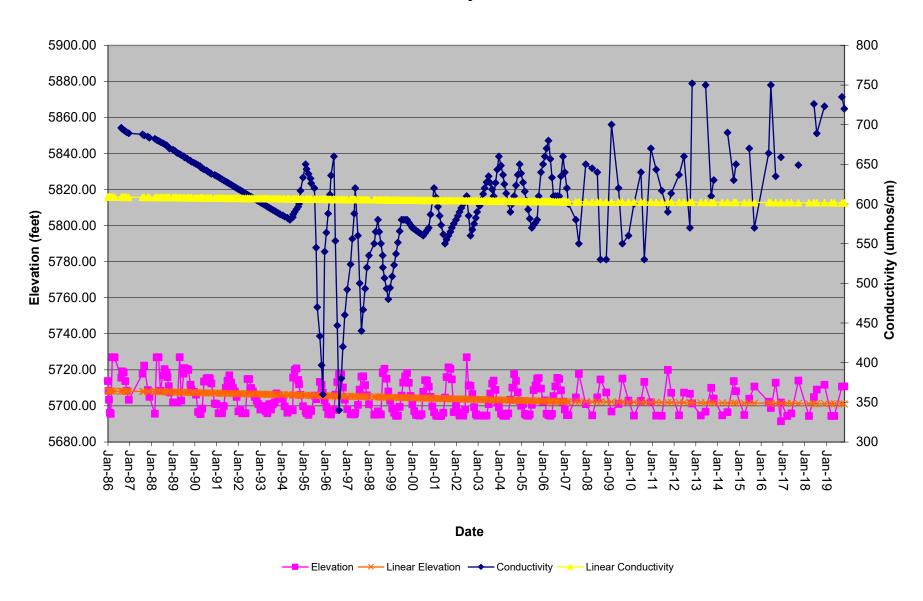

S1010 East Roatcap Creek - Spring 10-10 Elevation - 8650

| Initiated | 6/1/1992 | 6/1/1992 | 6/1/1992 |
|-----------|------------|-----------|-----------|
| Activated | 10/1/1993 | 10/1/1993 | 10/1/1993 |
| Date | 10/30/2019 | 8/12/2019 | 6/15/2019 |

| | - | Summary Information | | | • | | | | | |
|--------------------------|----------|---------------------|------|------|--|--|--|-----|-----|------|
| Field | | Baseline | • | | Operation | on | | | | |
| Parameters | UNITS | Min | Ave | Max | Min | Ave | Max | | | |
| Flow | GPM | 0.0449 | 0.20 | 0.45 | 0 | 0.62 | 18.80 | | | |
| Temperature | Celsius | | | | 5.0 | 14.4 | 23.2 | | | |
| Conductivity | umhos/cm | 160 | 188 | 215 | 70 | 224 | 470 | | | |
| рН | su | | | | 6.8 | 7.94 | 9.10 | | | |
| Field Comments | | | | | | | | Dry | Dry | Damp |
| Lab | | | | | | | | | | |
| Parameters | UNITS | | | | | | | | | |
| Bicarbonate | mg/L | | | | 45 | 78 | 110 | | | |
| Carbonate | mg/L | | | | <mdl< td=""><td><mdl< td=""><td><mdl< td=""><td></td><td></td><td></td></mdl<></td></mdl<></td></mdl<> | <mdl< td=""><td><mdl< td=""><td></td><td></td><td></td></mdl<></td></mdl<> | <mdl< td=""><td></td><td></td><td></td></mdl<> | | | |
| Chloride | mg/L | | | | 2 | 2 | 2 | | | |
| Conductivity | umhos/cm | | | | 87 | 149 | 210 | | | |
| Hardness | mg/L | | | | 43 | 71 | 99 | | | |
| рН | su | | | | 7.8 | 7.9 | 8.0 | | | |
| ResidueFilterable-TDS | mg/L | | | | 80 | 92 | 104 | | | |
| ResidueNonFilterable-TSS | mg/L | | | | 18 | 18 | 18 | | | |
| SAR | | | | | 0.19 | 0.20 | 0.22 | | | |
| Sulfate | mg/L | | | | 6 | 6 | 6 | | | |
| Calcium (Dissolved) | mg/L | | | | 10.8 | 16.9 | 23.0 | | | |
| Magnesium (Dissolved) | mg/L | | | | 3.8 | 6.9 | 10.0 | | | |
| Sodium (Dissolved) | mg/L | | | | 2.9 | 4.0 | 5.0 | | | |
| TDS Ratio (grav./calc.) | | | | | | | | | | |

Spring 10-10 is located in the NW1/4SE1/4 of Section 10, T13S, R92W. This spring was not observed to be developed.

"A small seep occurs along the jeep trail between Ponds 10-2 and Pond 10-3 at an elevation of approximately 8560 feet. Flow was observed but too low to measure or sample. Vegetation consisted of green mosses and grasses." (Simon Hydro Search, 92)

TDS Ratio (grav./calc.)

S2500 Steven's Gulch - Spring 25 Elevation - 7160

| | | | | | | Initiate | ed | 4/14/1983 | 4/14/1983 | 4/14/1983 |
|--------------------------|----------|---|---|---|--------|----------|-----|-----------|-----------|-----------|
| | | | | | | Activa | ted | | | |
| | | | | | | Date | | 10/5/2019 | 8/7/2019 | 6/19/2019 |
| | _ | Summa | ry Inform | nation | | - | | | | |
| Field | | Baseline | • | | Operat | ion | | | | |
| Parameters | UNITS | Min | Ave | Max | Min | Ave | Max | | | |
| Flow | GPM | 0 | 0.40 | 7.49 | | | | 0 | 0 | 0 |
| Temperature | Celsius | 5.0 | 14.1 | 27.9 | | | | | | |
| Conductivity | umhos/cm | 1960 | 2992 | 4470 | | | | | | |
| рН | su | 6.9 | 7.9 | 9.1 | | | | | | |
| Field Comments | | | | | | | | Dry | Dry | Dry |
| Lab | | | | | | | | | | |
| Parameters | UNITS | | | | | | | | | |
| Bicarbonate | mg/L | 483 | 846 | 1040 | | | | | | |
| Carbonate | mg/L | <mdl< td=""><td><mdl< td=""><td><mdl< td=""><td></td><td></td><td></td><td></td><td></td><td></td></mdl<></td></mdl<></td></mdl<> | <mdl< td=""><td><mdl< td=""><td></td><td></td><td></td><td></td><td></td><td></td></mdl<></td></mdl<> | <mdl< td=""><td></td><td></td><td></td><td></td><td></td><td></td></mdl<> | | | | | | |
| Chloride | mg/L | 22 | 43 | 58 | | | | | | |
| Conductivity | umhos/cm | 1650 | 3062 | 3780 | | | | | | |
| Hardness | mg/L | 679 | 1387 | 1894 | | | | | | |
| рН | su | 7.4 | 8.02 | 8.4 | | | | | | |
| ResidueFilterable-TDS | mg/L | 1036 | 2450 | 3398 | | | | | | |
| ResidueNonFilterable-TSS | mg/L | 8 | 92 | 492 | | | | | | |
| SAR | | 0.98 | 3.84 | 4.76 | | | | | | |
| Sulfate | mg/L | 811 | 1311 | 1827 | | | | | | |
| Calcium (Dissolved) | mg/L | 73 | 140 | 208 | | | | - | | |
| Magnesium (Dissolved) | mg/L | 121 | 252 | 346 | | | | | | |
| Sodium (Dissolved) | mg/L | 192 | 339 | 396 | | | | - | | |
| Potassium | mg/L | <mdl< td=""><td>3.07</td><td>9.2</td><td></td><td></td><td></td><td></td><td></td><td></td></mdl<> | 3.07 | 9.2 | | | | | | |
| 1 | | | | | | | | | | |


The area of concern for monitoring point S2500 has not been affected by the mining operation. Therefore, all recorded monitoring events are considered Baseline.

1.01

1.01

1.01

Plot of Flow and Conductivity

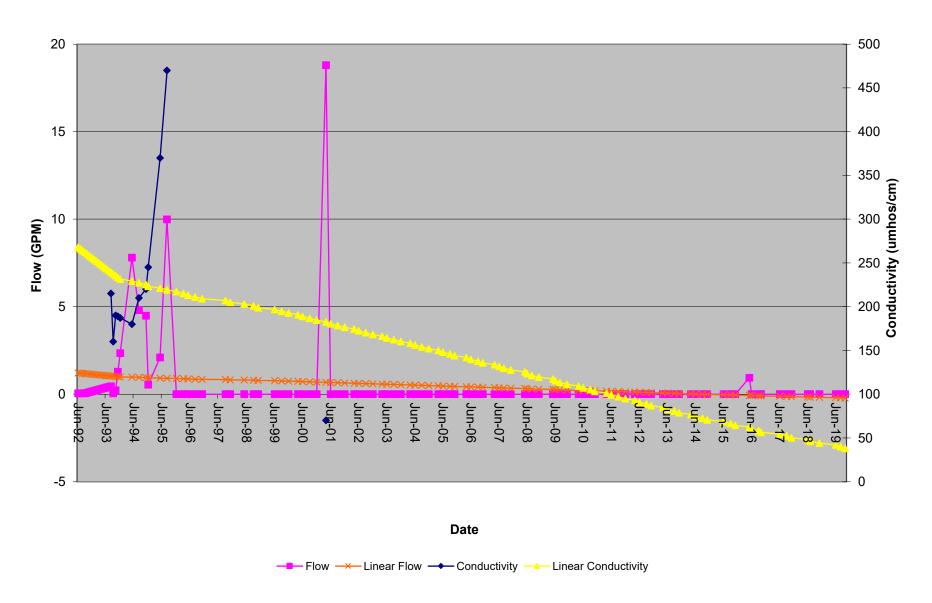

S1404 West Roatcap Creek - Spring 14-4 Elevation - 7480


| Initiated | 12/2/1996 | 12/2/1996 | 12/2/1996 |
|-----------|------------|------------|------------|
| Activated | 11/22/1998 | 11/22/1998 | 11/22/1998 |
| Date | 10/30/2019 | 8/7/2019 | 5/13/2019 |

| | | | | | | Date | | 10/30/2019 | 8/7/2019 | 5/13/2019 |
|--------------------------|----------|--|--|--|--|--|--|------------|-----------------|-----------|
| | | Summa | ry Inform | ation | | | | | | |
| Field | | Baseline |) | | Operation | n | | | | |
| Parameters | UNITS | Min | Ave | Max | Min | Ave | Max | | | |
| Flow | GPM | 0 | 1.51 | 5.00 | 0 | 0.26 | 3.00 | Damp | | 0.018 |
| Temperature | Celsius | 4.4 | 8.7 | 12.4 | 0.5 | 9.7 | 21.2 | | 13.6 | 7.1 |
| Conductivity | umhos/cm | 760 | 883 | 1000 | 655 | 838 | 980 | | 841 | 669 |
| рН | su | 6.8 | 7.3 | 7.6 | 7.0 | 7.4 | 8.21 | | 7.8 | 7.64 |
| Field Comments | | | | | | | | 1 | No visible flow | |
| Lab | | | | | | | | | | |
| Parameters | UNITS | | | | | | | | | |
| Bicarbonate | mg/L | 352 | 354 | 355 | 289.1 | 354 | 402 | | | 349 |
| Carbonate | mg/L | <mdl< td=""><td><mdl< td=""><td><mdl< td=""><td><mdl< td=""><td><mdl< td=""><td><mdl< td=""><td></td><td></td><td></td></mdl<></td></mdl<></td></mdl<></td></mdl<></td></mdl<></td></mdl<> | <mdl< td=""><td><mdl< td=""><td><mdl< td=""><td><mdl< td=""><td><mdl< td=""><td></td><td></td><td></td></mdl<></td></mdl<></td></mdl<></td></mdl<></td></mdl<> | <mdl< td=""><td><mdl< td=""><td><mdl< td=""><td><mdl< td=""><td></td><td></td><td></td></mdl<></td></mdl<></td></mdl<></td></mdl<> | <mdl< td=""><td><mdl< td=""><td><mdl< td=""><td></td><td></td><td></td></mdl<></td></mdl<></td></mdl<> | <mdl< td=""><td><mdl< td=""><td></td><td></td><td></td></mdl<></td></mdl<> | <mdl< td=""><td></td><td></td><td></td></mdl<> | | | |
| Chloride | mg/L | 19 | 20 | 21 | 3.66 | 43 | 136.48 | | | 9.2 |
| Conductivity | umhos/cm | 780 | 800 | 819 | 311 | 801 | 999 | | | 552 |
| Hardness | mg/L | 398 | 401 | 404 | 31.73 | 312 | 455 | | | 284 |
| Acidity | mg/L | | | | -265 | -34 | 30 | | | -265 |
| рН | su | 8.0 | 8.0 | 8.0 | 6.77 | 7.7 | 8.9 | | | 7.7 |
| ResidueFilterable-TDS | mg/L | 480 | 490 | 500 | 190 | 548 | 688 | | | 389 |
| ResidueNonFilterable-TSS | mg/L | 6 | 7 | 8 | <mdl< td=""><td>27</td><td>66</td><td></td><td></td><td>36.5</td></mdl<> | 27 | 66 | | | 36.5 |
| SAR | | 0.93 | 0.96 | 0.98 | 0.396 | 1.05 | 1.677 | | | 0.869 |
| Sulfate | mg/L | 80 | 80 | 80 | 30 | 71 | 130 | | | 35.6 |
| Calcium (Dissolved) | mg/L | 101 | 104.0 | 107 | 7 | 73.7 | 114 | | | 79.8 |
| Iron (Dissolved) | mg/L | | | | 0.01 | 0.04 | 0.08 | | | 0.01 |
| Iron (Total) | mg/L | | | | 0.08 | 0.40 | 0.79 | | | 0.6 |
| Magnesium (Dissolved) | mg/L | 33.3 | 34.4 | 35.4 | 3.46 | 31.5 | 45.8 | | | 26.5 |
| Manganese (Total) | mg/L | | | | 0.01 | 0.08 | 0.37 | | | 0.0126 |
| Sodium (Dissolved) | mg/L | 42.5 | 43.6 | 44.7 | 5.2 | 42.9 | 71.4 | | | 31.8 |

^{*} No visible flow

This spring is a marshlike area of about 20' x 20'. (Hanna, 99)

Plot of Flow and Conductivity

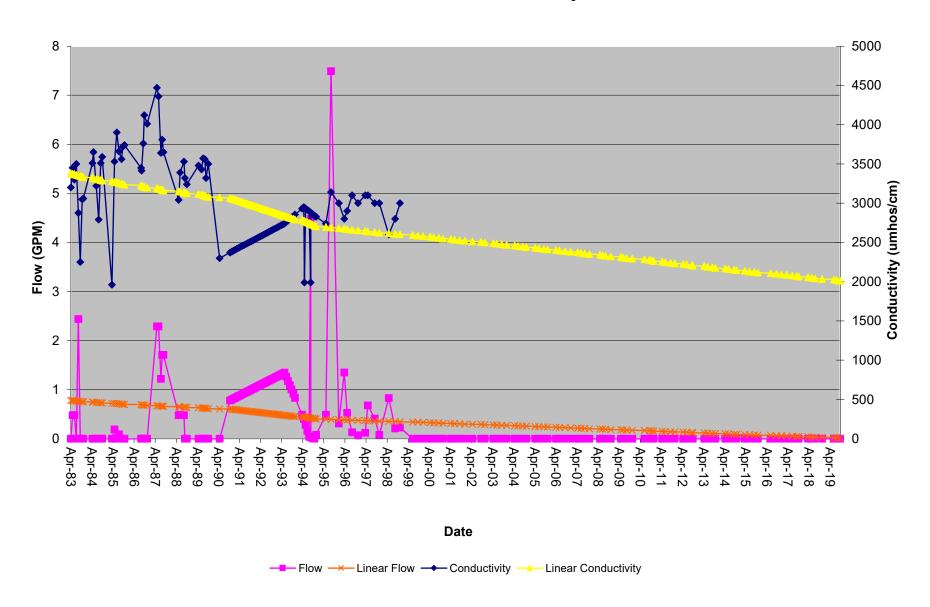

S3000 East Roatcap Creek - Spring 30 Elevation - 7840

| | | | | | | Initiate | ed | 5/16/1983 | 5/16/1983 | 5/16/1983 |
|--------------------------|----------|--|--|--|--------|----------|-----|------------|-----------|---------------------|
| | | | | | | Activa | ted | | | |
| | | | | | | Date | | 10/30/2019 | 8/7/2019 | 5/13/2019 |
| | _ | Summa | ry Inform | ation | | | | | | |
| Field | | Baseline | Э | | Operat | ion | | | | |
| Parameters | UNITS | Min | Ave | Max | Min | Ave | Max | | | |
| Flow | GPM | 0 | 0.47 | 12.1 | | | | | | 0.8 |
| Temperature | Celsius | 8.0 | 9.5 | 22.9 | | | | | | 7.2 |
| Conductivity | umhos/cm | 7.6 | 672 | 900 | | | | | | 853 |
| рН | su | 6.0 | 14.3 | 650.0 | | | | | | 7.66 |
| Field Comments | | | | | | | | Dry | No flow | |
| Lab | | | | | | | | | | |
| Parameters | UNITS | | | | | | | | | |
| Bicarbonate | mg/L | 107 | 303 | 381 | | | | | | 380 |
| Carbonate | mg/L | <mdl< td=""><td><mdl< td=""><td><mdl< td=""><td></td><td></td><td></td><td></td><td></td><td><mdl< td=""></mdl<></td></mdl<></td></mdl<></td></mdl<> | <mdl< td=""><td><mdl< td=""><td></td><td></td><td></td><td></td><td></td><td><mdl< td=""></mdl<></td></mdl<></td></mdl<> | <mdl< td=""><td></td><td></td><td></td><td></td><td></td><td><mdl< td=""></mdl<></td></mdl<> | | | | | | <mdl< td=""></mdl<> |
| Chloride | mg/L | 1.88 | 12.05 | 81.31 | | | | | | 12.3 |
| Conductivity | umhos/cm | 180 | 654 | 844 | | | | | | 711 |
| Hardness | mg/L | 81.0 | 324.5 | 479.3 | | | | | | 380 |
| Acidity | mg/L | -351 | -141 | 82.26 | | | | | | -300 |
| рН | su | 7.1 | 7.8 | 8.3 | | | | | | 7.78 |
| ResidueFilterable-TDS | mg/L | 155 | 423 | 566 | | | | | | 503 |
| ResidueNonFilterable-TSS | mg/L | <mdl< td=""><td>26</td><td>116</td><td></td><td></td><td></td><td></td><td></td><td><mdl< td=""></mdl<></td></mdl<> | 26 | 116 | | | | | | <mdl< td=""></mdl<> |
| SAR | | 0.24 | 0.79 | 7.3 | | | | | | 0.759 |
| Sulfate | mg/L | 8 | 67 | 120 | | | | | | 101 |
| Calcium (Dissolved) | mg/L | 0.123 | 84.5 | 145.6 | | | | | | 0.123 |
| Iron (Dissolved) | mg/L | 0.01 | 0.02 | 0.0331 | | | | | | 0.0121 |
| Iron (Total) | mg/L | 0.02 | 0.18 | 0.66 | | | | | | 0.0283 |
| Magnesium (Dissolved) | mg/L | 0.0 | 24.6 | 73.0 | | | | | | 0.0304 |
| Manganese (Total) | mg/L | 0.001 | 0.04 | 0.12 | | | | | | <mdl< td=""></mdl<> |
| | | | | | | | | | | |

The area of concern for monitoring point S3000 has not been affected by the mining operation. Therefore, all recorded monitoring events are considered Baseline.

47

0

24.3

Sodium (Dissolved)


This 5' x 5' spring comes out of the toe of a side gulch. (Hanna, 99)

mg/L

0.0363

^{*}No laboratory data for this parameter

Plot of Flow and Conductivity

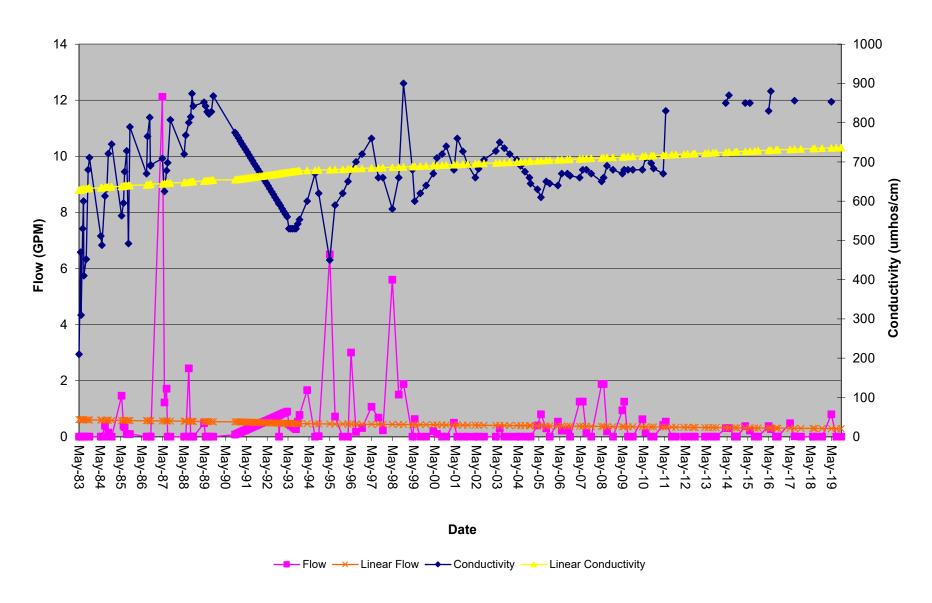


SW05 Steven's Gulch Elevation - 6600

| | | | | | | Initiated | | 1/1/1983 | 1/1/1983 | 1/1/1983 | 1/1/1983 |
|--------------------------|----------|---|-----------|-------|---|-----------|--------|------------|------------|------------------------------|------------|
| | | | | | | Activate | d | 12/21/1986 | 12/21/1986 | 12/21/1986 | 12/21/1986 |
| | | | | | | Date | | 10/22/2019 | 8/12/2019 | 5/8/2019 | 3/28/2019 |
| | | Summa | ry Inform | ation | • | | | | | | |
| Field | Ī | Baseline | e | | Operation | on | | | | | |
| Parameters | UNITS | Min | Ave | Max | Min | Ave | Max | | | | |
| Flow | CFS | 0 | 3.1 | 16.9 | 0.00 | 1.38 | 30.13 | 0.11 | 0.23 | 2.32 | 0.03 |
| Water Level in Flume | Feet | | | | 0.00 | 0.08 | 1.06 | 0.05 | 0.08 | 0.35 | 0.02 |
| Temperature | Celsius | -0.5 | 10.8 | 23.7 | 0.0 | 10.2 | 23.6 | 3.8 | 17.5 | 8.3 | 4.8 |
| Conductivity | umhos/cm | 170 | 746 | 1605 | 40 | 524 | 2000 | 391 | 412 | 227 | 833 |
| pH | su | 7.3 | 8.5 | 9.9 | 6.9 | 8.3 | 9.0 | 8.24 | 8.42 | 8.1 | 8.33 |
| Field Comments | | | | | | | | | | | |
| Lab | | | | | | | | | | | |
| Parameters | UNITS | | | | | | | | | | |
| Bicarbonate | mg/L | 89 | 302 | 456 | 83 | 203 | 456 | | | 104 | |
| Carbonate | mg/L | <mdl< td=""><td>1</td><td>7</td><td><mdl< td=""><td>3.76</td><td>12.65</td><td></td><td></td><td><mdl< td=""><td></td></mdl<></td></mdl<></td></mdl<> | 1 | 7 | <mdl< td=""><td>3.76</td><td>12.65</td><td></td><td></td><td><mdl< td=""><td></td></mdl<></td></mdl<> | 3.76 | 12.65 | | | <mdl< td=""><td></td></mdl<> | |
| Chloride | mg/L | 2 | 16 | 31 | <mdl< td=""><td>13.82</td><td>43.00</td><td></td><td></td><td>3.1</td><td></td></mdl<> | 13.82 | 43.00 | | | 3.1 | |
| Conductivity | umhos/cm | 170 | 734 | 1290 | 149 | 551 | 1560 | | | 183 | |
| Hardness | mg/L | 72 | 312 | 534 | 35.6 | 226.9 | 625.7 | | | 83.4 | |
| Acidity | mg/L | | | | -330.0 | -68.0 | 24.0 | | | -80 | |
| pН | su | 6.8 | 8.1 | 8.7 | 7.2 | 8.1 | 8.6 | | | 8.1 | |
| ResidueFilterable-TDS | mg/L | 120 | 488 | 794 | 19 | 375 | 1130 | | | 132 | |
| ResidueNonFilterable-TSS | mg/L | 2 | 77 | 438 | <mdl< td=""><td>31</td><td>408</td><td></td><td></td><td><mdl< td=""><td></td></mdl<></td></mdl<> | 31 | 408 | | | <mdl< td=""><td></td></mdl<> | |
| SAR | | 0.56 | 1.14 | 1.60 | 0.23 | 1.05 | 2.06 | | | 0.613 | |
| Sulfate | mg/L | 14 | 131.5 | 338.0 | <mdl< td=""><td>96.50</td><td>450.00</td><td></td><td></td><td>13</td><td></td></mdl<> | 96.50 | 450.00 | | | 13 | |
| Calcium (Dissolved) | mg/L | 19 | 71.8 | 110.0 | 6.8 | 51.2 | 132.0 | | | 22.1 | |
| Iron (Dissolved) | mg/L | 6 | 32.1 | 66.0 | <mdl< td=""><td>0.09</td><td>0.61</td><td></td><td></td><td>0.131</td><td></td></mdl<> | 0.09 | 0.61 | | | 0.131 | |
| Iron (Total) | mg/L | 11.00 | 47.82 | 85.00 | 0.02 | 0.41 | 1.46 | | | 0.328 | |
| Magnesium (Dissolved) | mg/L | 6.0 | 32.1 | 66.0 | 4.5 | 25.6 | 86.2 | | | 7.89 | |
| Sodium (Dissolved) | mg/L | 11.0 | 47.8 | 85.0 | 0.0 | 40.0 | 115.0 | | | 13.2 | |
| Manganese (Total) | mg/L | | | | <mdl< td=""><td>2.27</td><td>35.60</td><td></td><td></td><td>0.077</td><td></td></mdl<> | 2.27 | 35.60 | | | 0.077 | |

The Stevens Gulch stream gauge, SW05, is located near Bowie No. 1 mine's timber storage area in the NE1/4NW1/4, Sec 25, T13S, R92W, of the twas installed at this location.

^{*} Flow not measurable

Plot of Flow and Conductivity

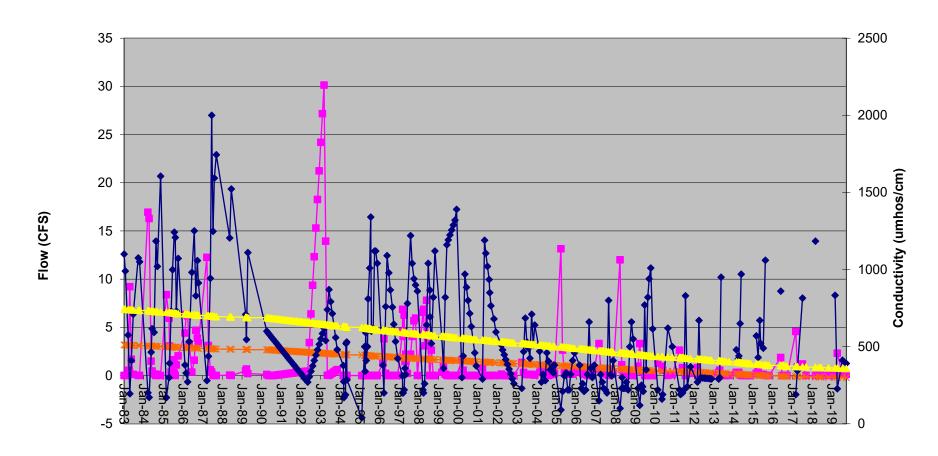



SW06 East Roatcap Creek - Downstream Elevation - 6740

| | | | | | | Initiated | | 1/1/1983 | 1/1/1983 | 1/1/1983 |
|--------------------------|----------|--|-----------|-------|--|-----------|--------|------------|------------|---------------------|
| | | | | | | | | | | |
| | | | | | | Activate | ea | 12/21/1986 | 12/21/1986 | 12/21/1986 |
| | | | | | | Date | | 10/30/2019 | 8/12/2019 | 5/5/2019 |
| | 1 | | ry Inform | ation | | | | | | |
| Field | | Baseline | | | Operation | | | | | |
| Parameters | UNITS | Min | | Max | Min | Ave | Max | | | |
| Flow | CFS | 0.00 | 4.65 | 45.75 | 0.00 | 8.04 | | 0.500 | 0.160 | |
| Water Level in Flume | Feet | | | | 0.00 | 0.21 | 1.22 | | | |
| Temperature | Celsius | 0.5 | 10.0 | 21.1 | 0.03 | 9.65 | 25.50 | 9.2 | 16.4 | 5.2 |
| Conductivity | umhos/cm | 60 | 277 | 691 | 80 | 591 | 1650 | 310 | 227 | 114.2 |
| pН | su | 6.5 | 8.3 | 9.2 | 6.9 | 8.4 | 9.0 | 8.4 | 8.21 | 8.16 |
| Field Comments | | | | | | | | | ï | Vo flow listed |
| Lab | | | | | | | | | | |
| Parameters | UNITS | | | | | | | | | |
| Bicarbonate | mg/L | 60 | 155 | 289 | 58 | 235 | 440 | | | 57.5 |
| Carbonate | mg/L | <mdl< td=""><td>1</td><td>7.1</td><td><mdl< td=""><td>7.26</td><td>52.00</td><td></td><td></td><td><mdl< td=""></mdl<></td></mdl<></td></mdl<> | 1 | 7.1 | <mdl< td=""><td>7.26</td><td>52.00</td><td></td><td></td><td><mdl< td=""></mdl<></td></mdl<> | 7.26 | 52.00 | | | <mdl< td=""></mdl<> |
| Chloride | mg/L | 1 | 5 | 10 | <mdl< td=""><td>14.15</td><td>68.00</td><td></td><td></td><td>0.87</td></mdl<> | 14.15 | 68.00 | | | 0.87 |
| Conductivity | umhos/cm | 110 | 275 | 670 | 89.9 | 607.2 | 1430.0 | | | 89.9 |
| Hardness | mg/L | 58 | 158 | 291 | 44.90 | 273.19 | 697.00 | | | 44.9 |
| Acidity | mg/L | | | | -370 | -89 | 62 | | | -40 |
| pН | su | 6.8 | 7.9 | 8.4 | 6.50 | 8.07 | 8.60 | | | 7.93 |
| ResidueFilterable-TDS | mg/L | 40 | 180 | 380 | 50 | 418 | 1130 | | | 87 |
| ResidueNonFilterable-TSS | mg/L | 18 | 104 | 524 | <mdl< td=""><td>21</td><td>138</td><td></td><td></td><td>6.7</td></mdl<> | 21 | 138 | | | 6.7 |
| SAR | | 0.11 | 0.46 | 0.72 | 0.28 | 0.98 | 5.93 | | | 0.324 |
| Sulfate | mg/L | 10 | 32 | 80 | 2.20 | 89.86 | 410.00 | | | 2.2 |
| Calcium (Dissolved) | mg/L | 15 | 37 | 69 | 10.5 | 55.2 | 125.0 | | | 11.5 |
| Iron (Dissolved) | mg/L | | | | 0.01 | 0.14 | 0.83 | | | 0.322 |
| Iron (Total) | mg/L | | | | 0.07 | 0.77 | 2.78 | | | 0.334 |
| Magnesium (Dissolved) | mg/L | 4 | 14 | 29 | 4.0 | 32.9 | 99.2 | | | 4 |
| Manganese (Total) | mg/L | | | | <mdl< td=""><td>0.059</td><td>0.165</td><td></td><td></td><td>0.0191</td></mdl<> | 0.059 | 0.165 | | | 0.0191 |


SW06 is located on East Roatcap Creek in the NE1/4SW1/4 Sec 23, T13S, R92W of the 6th P.M. A 36" Parshall flume was also installe

5.00 40.53 196.00

Sodium (Dissolved)

^{*} Sample taken on 3/28/16

Plot of Flow and Conductivity

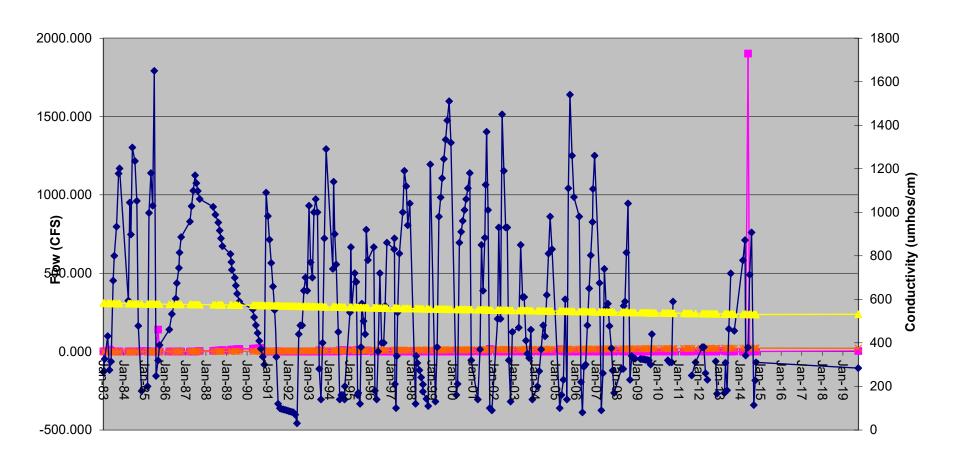




SP1305 Steven's Gulch - Pond Spring 13-5 Depth 4' Elevation - 7680

| Initiated | 7/6/1983 | 7/6/1983 | 7/6/1983 |
|-----------|-----------|-----------|-----------|
| Activated | 12/1/1992 | 12/1/1992 | 12/1/1992 |
| Date | 10/5/2019 | 8/7/2019 | 6/18/2019 |

| | | | | | | Date | | 10/3/2019 | 0/1/2019 | 0/10/2019 |
|--------------------------|----------|--|-------|------|--|--|--|-----------|--------------|-----------|
| | | Summary Information | | | | | | | | |
| Field | | Baseline | Э | | Operation | on | | | | |
| Parameters | UNITS | Min | Ave | Max | Min | Ave | Max | | | |
| Flow | GPM | 0 | 1.82 | 13 | 0 | 1.66 | 34 | 0 | 0 | 0 |
| Freeboard | Feet | 0 | 0.00 | 0 | 0 | 1.98 | 4.81 | 3.2 | 3.2 | 3.2 |
| Temperature | Celsius | 2.8 | 13.6 | 24.4 | 0.4 | 12.3 | 21.2 | | 14.1 | |
| Conductivity | umhos/cm | 151 | 603 | 839 | 300 | 593 | 980 | | 630 | |
| рН | su | 7.1 | 26.5 | 640 | 7 | 7.8 | 8.6 | | 7.55 | |
| Field Comments | | | | | | | | Dry | Damp-no flov | Dry |
| Lab | | | | | | | | | | |
| Parameters | UNITS | | | | | | | | | |
| Bicarbonate | mg/L | 253 | 369 | 434 | 96 | 224 | 323 | | | |
| Carbonate | mg/L | <mdl< td=""><td>1</td><td>6</td><td><mdl< td=""><td><mdl< td=""><td><mdl< td=""><td></td><td></td><td></td></mdl<></td></mdl<></td></mdl<></td></mdl<> | 1 | 6 | <mdl< td=""><td><mdl< td=""><td><mdl< td=""><td></td><td></td><td></td></mdl<></td></mdl<></td></mdl<> | <mdl< td=""><td><mdl< td=""><td></td><td></td><td></td></mdl<></td></mdl<> | <mdl< td=""><td></td><td></td><td></td></mdl<> | | | |
| Chloride | mg/L | 3 | 12 | 66 | 2 | 16 | 62.04 | | | |
| Conductivity | umhos/cm | 477 | 651 | 804 | 231 | 444 | 635 | | | |
| Hardness | mg/L | 225 | 267 | 325 | 98 | 179 | 248 | | | |
| Acidity | mg/L | | | | 24 | 24.00 | 24 | | | |
| рН | su | 7.4 | 7.83 | 8.2 | 7.46 | 7.86 | 8.1 | | | |
| ResidueFilterable-TDS | mg/L | 156 | 367 | 452 | 130 | 267 | 372 | | | |
| ResidueNonFilterable-TSS | mg/L | 2 | 103 | 358 | 8 | 40 | 108 | | | |
| SAR | | 0.84 | 1.38 | 1.8 | 0.89 | 1.13 | 1.748 | | | |
| Sulfate | mg/L | 23 | 64 | 130 | 10 | 39 | 60.92 | | | |
| Calcium (Dissolved) | mg/L | 47 | 61.92 | 79 | 24.9 | 45.08 | 60 | | | |
| Iron (Dissolved) | mg/L | | | | 0.04 | 0.04 | 0.04 | | | |
| Iron (Total) | mg/L | | | | 0.77 | 0.77 | 0.77 | | | |
| Magnesium (Dissolved) | mg/L | 20 | 27.33 | 32 | 8.7 | 16.07 | 24 | | | |
| Manganese (Total) | mg/L | | | | 0.42 | 0.42 | 0.42 | | | |
| Sodium (Dissolved) | mg/L | 29 | 51.67 | 64 | 12.8 | 33.60 | 57.8 | | | |
| TDS Ratio (grav./calc.) | | | | | 0.96 | 1.04 | 1.1 | | | |

Spring and Pond 13-5 is a man made stock pond with a piped spring (approximately 50' x 30'). The pond is fed from a spring and seep located above the pond. (Gordon, 83)

Plot of Flow and Conductivity

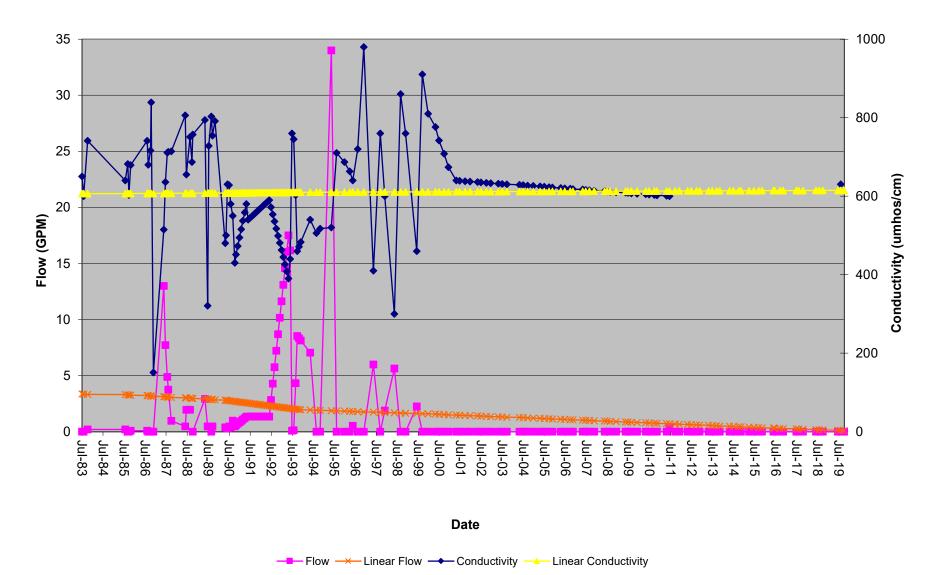

SP1306 Steven's Gulch - Pond Spring 13-6 Depth 4' Elevation - 7590


| Initiated | 7/5/1983 | 7/5/1983 | 7/5/1983 |
|-----------|-----------|----------|-----------|
| Activated | 1/1/1988 | 1/1/1988 | 1/1/1988 |
| Date | 10/5/2019 | 8/7/2019 | 6/18/2019 |

| | | Summa | ry Inform | ation | Į. | | | • | | - |
|--------------------------|----------|---|---|---|--|------|------|-----|-----|-----|
| Field | | Baseline | e | | Operation | on | | | | |
| Parameters | UNITS | Min | Ave | Max | Min | Ave | Max | | | |
| Flow | GPM | 0 | 0.75 | 3.76 | 0 | 0.44 | 3.91 | 0 | 0 | 0 |
| Freeboard | Feet | 0 | 0.00 | 0 | 0 | 1.50 | 95 | | | |
| Temperature | Celsius | 5 | 14.0 | 24 | 0.3 | 12.8 | 25.6 | | | |
| Conductivity | umhos/cm | 611 | 787 | 916 | 330 | 510 | 760 | | | |
| рН | su | 7.2 | 7.8 | 8.4 | 6.9 | 8.0 | 8.9 | | | |
| Field Comments | | | | | | | | Dry | Dry | Dry |
| Lab | | | | | | | | | | |
| Parameters | UNITS | | | | | | | | | |
| Bicarbonate | mg/L | 407 | 431 | 470 | 280 | 340 | 410 | | | |
| Carbonate | mg/L | <mdl< td=""><td><mdl< td=""><td><mdl< td=""><td><mdl< td=""><td>3</td><td>26</td><td></td><td></td><td></td></mdl<></td></mdl<></td></mdl<></td></mdl<> | <mdl< td=""><td><mdl< td=""><td><mdl< td=""><td>3</td><td>26</td><td></td><td></td><td></td></mdl<></td></mdl<></td></mdl<> | <mdl< td=""><td><mdl< td=""><td>3</td><td>26</td><td></td><td></td><td></td></mdl<></td></mdl<> | <mdl< td=""><td>3</td><td>26</td><td></td><td></td><td></td></mdl<> | 3 | 26 | | | |
| Chloride | mg/L | 5 | 9 | 12 | 2 | 6 | 8 | | | |
| Conductivity | umhos/cm | 650 | 729 | 868 | 491 | 596 | 752 | | | |
| Hardness | mg/L | 325 | 370 | 423 | 242 | 305 | 414 | | | |
| рН | su | 7.6 | 7.98 | 8.3 | 7 | 7.9 | 8.6 | | | |
| ResidueFilterable-TDS | mg/L | 330 | 416 | 473 | 300 | 351 | 430 | | | |
| ResidueNonFilterable-TSS | mg/L | 4 | 22 | 40 | 6 | 26 | 76 | | | |
| SAR | | 0.59 | 0.71 | 0.92 | 0.35 | 0.43 | 0.60 | | | |
| Sulfate | mg/L | 29 | 42 | 58 | 10 | 38 | 200 | | | |
| Calcium (Dissolved) | mg/L | 63 | 71.50 | 87 | 51.0 | 61.9 | 86.5 | | | |
| Magnesium (Dissolved) | mg/L | 39 | 46.50 | 50 | 28.0 | 36.7 | 48.0 | | | |
| Sodium (Dissolved) | mg/L | 27 | 31.50 | 40 | 13.0 | 17.6 | 23.0 | | | |
| Potassium | mg/L | | | | <mdl< td=""><td>1.50</td><td>6</td><td></td><td></td><td></td></mdl<> | 1.50 | 6 | | | |
| TDS Ratio (grav./calc.) | | | | | <mdl< td=""><td>0.77</td><td>1.08</td><td></td><td></td><td></td></mdl<> | 0.77 | 1.08 | | | |

Spring and Pond 13-6 is a man made pond (approximately 25' x 25') and is fed by a spring located on the hillside above the pond. (Gordon, 83)

Pond is mostly breached, standing puddle (Hanna 4/24/14)

Plot of Flow and Conductivity

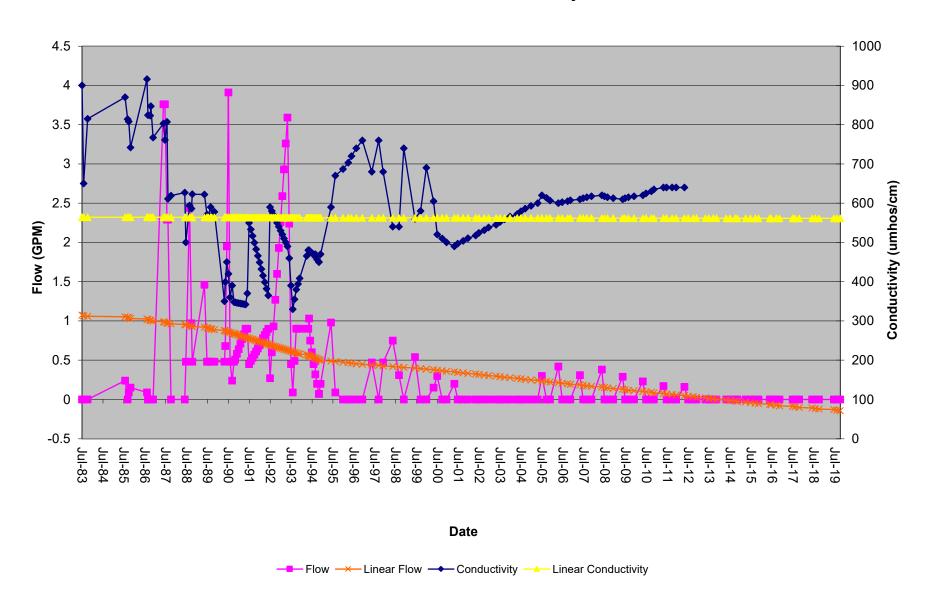


2019 ANNUAL INFLOW REPORT



BOWIE RESOURCES, LLC
BOWIE NO. 1 MINE
P.O. BOX 483
PAONIA, COLORADO 81428
PERMIT C-1981-038

PREPARED BY:

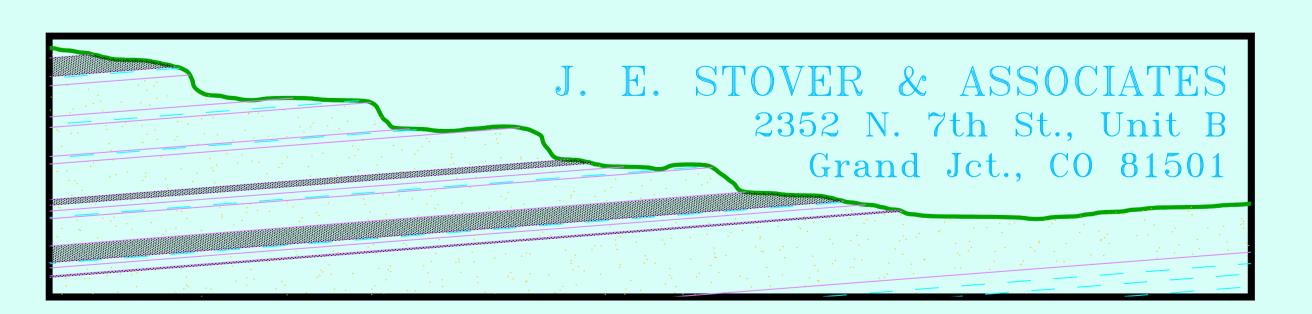

ANNUAL MINE INFLOW REPORT

<u> 2019</u>

Bowie No. 1 Mine
Bowie Resources, LLC
Paonia, Colorado

Introduction

According to Stipulation No. 29, Permit No. C-1981-038, the operator submits the following Annual Mine Inflow Report for the period of July 1, 2016 through June 30, 2019.

Mining Locations and Projections

Mining operations at Bowie No. 1 Mine have ceased due to market conditions and coal quality issues. It is highly unlikely mining operations will resume since the surface facilities have been reclaimed.

Mine Inflow

The underground Mine Inflow Study at the Bowie No. 1 Mine was not conducted during 2019, as the mine was inactive and inaccessible.

No water was discharged from the mine to the surface during the 2018-2019 reporting period. The operator has no plans to discharge water from within the mine to the surface during the 2019-2020 reporting period. No water has been discharged from the mine to date.

Water Importation and Balance

There was no production of coal from the Bowie No. 1 Mine from July 1, 2018 through June 30, 2019. Production estimates for the following twelve-month period remain at zero. Historically, mine water importation is estimated from recorded flows and the number on tons mined. With no coal production to base water usage upon, the operator submits only evaporative loss from ponds for the consumptive use during the water year. Evaporative loss is based upon the assumption that all of the ponds have full dead pool storage during the entire reporting period.

These water quantities are listed as:

| • | Acre Feet |
|---|-----------|
| Dust Suppression on Bowie No. 1 Roadway | 0.00 |
| Bathhouse Consumption ¹ | 0.00 |
| Evaporative Loss from Ponds | |
| Silo Usage | 0.00 |
| Total water usage | 4.60 |

Hydrologic Impacts

Historically, there was virtually no water inflow into the mine. Therefore, the hydrologic impact caused by the mining operation is either non-existent or not measurable.

Conclusions

No mine discharge and no importation of water is anticipated during the 2019 - 2020 reporting period. Therefore, the quality and quantity of surface water adjacent to the mine will not be affected. The operator will continue to submit the Annual Subsidence and Hydrology Report which will summarize all subsidence and hydrology data.


¹Bathhouse has been dismantled.

2019 ANNUAL SUBSIDENCE REPORT



BOWIE RESOURCES, LLC
BOWIE NO. 1 MINE
P.O. BOX 483
PAONIA, COLORADO 81428
PERMIT C-1981-038

PREPARED BY:

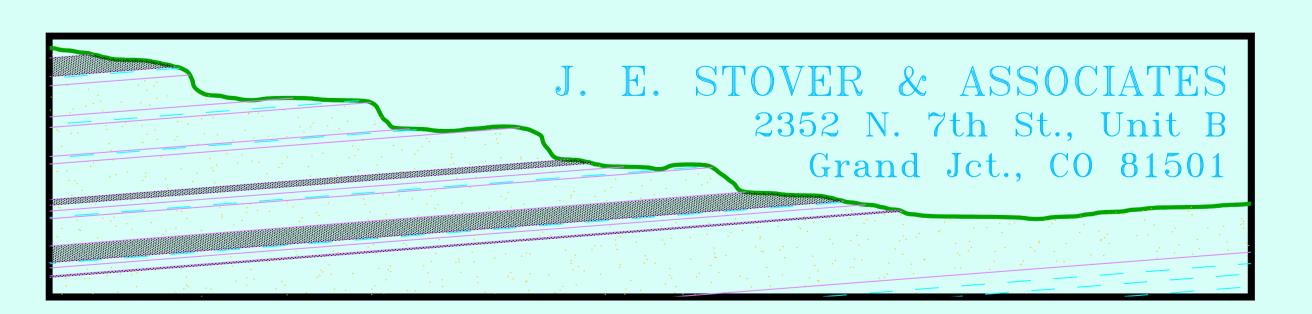

ANNUAL SUBSIDENCE REPORT

<u>2019</u>

Bowie No. 1 Mine

Bowie Resources, LLC

Paonia, Colorado

2019 Production and Geologic Conditions

The Bowie No. 1 Mine suspended operations during December, 1997 and remained idle throughout the calendar year. The mine has been reclaimed.

Operation Unit Descriptions

Bowie No. 1 Mine has no operating units to report on during the calendar year.

Subsidence Impacts - 2019

With the approval of technical revision number 25, no subsidence monitoring stations were surveyed during the year.

Wide-Spaced Monitoring Grid Station Summary

Through technical revision number 45, the DRMS approved a reduction in subsidence monitoring. The wide spaced subsidence monuments, Sites 6, 14, 15, 16, DH 55, DH 65, DH 66, DH 68, 81, 82, 83 and 95 were not monitored during the year.

Pitkin Mesa Pipeline

Seven subsidence monitoring stations were established at locations along the Pitkin Mesa Pipeline which overlies Panel C. Panel C development commenced in October with twenty-four crosscuts completed by January 1, 1993. Panel C was mined utilizing a partial extraction design intended to preclude the development of subsidence in order to protect the pipeline. The subsidence monitoring stations along the pipeline are depicted on Map No. 2-5. Though technical revision number 57, the DRMS approved the cessation of subsidence monitoring of the seven (7) Pitkin Mesa Pipeline monitoring locations. These monitoring stations (PL-01 through PL-07) were last surveyed during 2013.

Visual Monitoring 2019

Visual subsidence monitoring is accomplished by periodic "walkovers" of recently mined areas within the present permit area. During the 2019 monitoring season, visual monitoring consisted of visual inspections done while water monitoring.

Visual monitoring is concentrated over areas of retreat mining with particular emphasis on areas mined under low overburden. Since the mine has now been idled in excess of 10 years, there are no areas of particular emphasis on which to concentrate visual inspections.

Projected Subsidence Impacts - 2019

Subsidence impacts during 2019 are projected to be minimal based upon subsidence patterns established to date. No mining is currently projected for 2019.

Projected Subsidence Monitoring – 2019

No subsidence monitoring will be performed in 2019.

2018 MAPS



BOWIE RESOURCES, LLC
BOWIE NO. 1 MINE
P.O. BOX 483
PAONIA, COLORADO 81428
PERMIT C-1981-038

PREPARED BY:



