

P. O. Box 1887 • 702 Gregg Drive • Buena Vista CO 81211

Phone: (719) 395-3790 Fax: (719) 395-3794

March 2, 2022

Colorado Division of Reclamation, Mining, and Safety Attn: Dustin Czapla 1313 Sherman Street, Room 215 Denver, CO 80203

RE: R.B. Pit, File No. M-2022-002, Objection to 112c Application Response

Mr. Czapla:

On February 28, 2022, ACA Products, Inc. (Applicant) received an objection notice from the Division of Reclamation, Mining and Safety (DRMS) for the above referenced application on behalf of Hayden Springs Ranch LLC. A copy of the objection notice and the letter from Hayden Springs Ranch LLC dated February 28, 2022, contained therein are enclosed as *Exhibit 1* to this response.

In response to the expressed objections, the Applicant has the following to offer:

The R.B. Pit will be accessed from Colorado State Highway 50 at Mile Point (MP) 212.62 Left (L). No access to mining operations will be from Chaffee County Road (CR) 140 or CR 250. Section #10 of the above referenced application inadvertently indicated the coordinates of the center of the pit rather than the coordinates of the access location. Upon further review, the correct coordinates for the location on Colorado State Highway 50 at MP 212.62 L where the proposed mine site will be accessed from are 38.53623, -106.15262 (reference *Exhibit 2*).

The Applicant has obtained Colorado Department of Transportation (CDOT) Highway Access Permit No. 520022 (the CDOT Permit) to establish access to the proposed mine location from Colorado State Highway 50. An executed copy of the CDOT Permit is enclosed as *Exhibit 3* to this response.

The Applicant fully recognizes that the CDOT Permit includes terms and conditions that must be complied with in order to fully utilize the access granted. In particular, the Applicant realizes that all access improvements specified in the CDOT Permit are to be installed prior to any use of the access. To be clear, the Applicant has no intentions of violating this provision nor any other jurisdictional resolutions, provisions, or requirements. Accordingly, the Applicant will not commence any mining operations at the proposed mine site prior to installing the access improvements specified in the terms and conditions of the CDOT Permit.



P. O. Box 1887 • 702 Gregg Drive • Buena Vista CO 81211

Phone: (719) 395-3790 Fax: (719) 395-3794

Notwithstanding the above, at this juncture, it would be unreasonable and imprudent for the Applicant to make significant further expenditures towards construction of the specified access improvements prior to securing approval of the proposed mine site from DRMS. Once the R.B. Pit Application has been approved by DRMS, the Applicant will immediately continue with the steps necessary to construct the access improvements specified in the terms and conditions of the CDOT Permit.

Do not hesitate to contact Blake Bennetts, ACA Products, if any further information is needed or any other questions arise.

Sincerely,

Blake Bennetts, P.E.

Sales and Development Manager

ACA Products, Inc.

702 Gregg Drive; PO Box 1887

Buena Vista, CO 81211 Cell: (719) 248-4138

Email: bbennetts@acaproducts.com



P. O. Box 1887 • 702 Gregg Drive • Buena Vista CO 81211 Phone: (719) 395-3790 Fax: (719) 395-3794

Exhibit 1—Objection Letter

February 28, 2022

Blake Bennetts ACA Products, Inc. 702 Gregg Drive Buena Vista, CO 81211



1313 Sherman Street, Room 215 Denver, CO 80203

RE: R.B. Pit, File No. M-2022-002, Objection to 112c Application

Mr. Bennetts:

On February 28, 2022 the Division of Reclamation, Mining and Safety (Division) received an objection (copy enclosed) to the above referenced application from Hayden Springs Ranch LLC.

Please inform the Division of how the Applicant will respond to the jurisdictional issues presented by Hayden Springs Ranch. Please submit your response by March 11, 2022.

If you require additional information, or have questions or concerns, please contact me.

Sincerely,

Dustin Czapla

Environmental Protection Specialist Division of Reclamation, Mining and Safety

Phone: (303) 866-3567, ext. 8188



## HAYDEN SPRINGS RANCH LLC

13601 CR 140 P.O. BOX 567 Salida, Colorado 81201 (719) 239-1225

February 28, 2022

Dustin Czapla
Environmental Protection Specialist
Division of Reclamation, Mining and Safety
1313 Sherman St. Room 215
Denver, Colorado 80203

Re: File # M-2022-002, Application for R.B. Pit, by ACA Products, Inc.

Dear Dustin,

Thank you for forwarding the Response of the Applicant to our Objection Letter dated February 8, 2022, regarding the referenced Application. As detailed below, the Applicant has failed to provide any facts which resolve the merits of our Objections. Consequently, the Application should be denied.

To begin, the Applicant agrees with our first Objection that they are without any legal right to use Chaffee County Road 140 as the "primary mine entrance location". As indicated in Exhibit A attached hereto and incorporated herein by reference, the location provided by the Applicant at # 10 of the Application is the terminus of CR 140. Therefore, the Application is legally defective as it fails to designate a legal access to the proposed mining site.

Secondly, the Applicant falsely states in their Response at page 2 (paragraph 1) they have "obtained legal access to the proposed mine location...by obtaining the...CDOT Highway Access Permit....(Exhibit 2)". The Applicant then attached copies of the CDOT Access Permit file which began in February 2020. One of the Terms and Conditions of the CDOT Access Permit is provided at A. #14, which states "All required access improvements will be installed prior to any use of this access." (See page 20 of the Attachment). At this time, the Applicant has not made any improvements to Colorado State Highway 50. Thus, the Applicant presently has no legal right to access to the proposed mine location from any of public roads which border the Holman property.

The Applicant then falsely implies in their Response at paragraph 2, page 2, that one of the Terms and Conditions of the CDOT Access Permit has been met by the submission of the Design Plans, dated 1/27/20, shown in Exhibit 3 of the Response. The Applicant refers to these Design Plans as "approved." That statement if false.

CDOT Access Manager, Randi Reider, provided the Applicant an Extension of Time Letter dated, 10/13/21, which was included in Exhibit M of the Application. Therein, Ms. Reider states... "The access shall be constructed in accordance with a set of approved design plans..." When the final design plans are accepted and approved, a pre-construction conference must be scheduled...."

Review of the Design Plans dated 1/27/20, reveals that CDOT <u>has not</u> "accepted and approved" said Plans, as there is <u>no</u> signature from CDOT "accepting and approving" said Plans (See Exhibit 3 of Applicant's Response, pages 59-80). The Terms and Conditions of the CDOT Access Permit state at C. 2. (d) that "<u>Once accepted</u>, CDOT <u>will sign the plans as approved</u>. Once approved the design plans will become final..." (See page 21 of the Attachment).

Therefore, Ms. Reider's letter to the Applicant dated October 13, 2021, along with the lack of a signature from CDOT "accepting and approving" the Design Plans dated 1/27/20, indicate that the Applicant made a false statement in their Response. (See page 2, paragraph 2, ,wherein the Applicant stated "approved Design Plans, which are shown in Exhibit 3.")

After making false and misleading statements in their Response regarding the CDOT Access Permit, the Applicant concludes by stating that "thus far (they have) taken steps to obtain legal right to access, and transport mined materials from the proposed mine location..."

Hence, the Applicant agrees that at this time they do not have the legal right to use either Colorado State Highway 50 or Chaffee County Road 140 to access and transport the mined materials from the Holman property.

Because ACA lacks the legal right to use the only public roads available to transport the mined materials from the Holman property, the referenced Permit Application should be denied.

Please feel free to contact us with any questions or concerns regarding this matter.

Sincerely,	
HAYDEN SPRINGS RANCH LLC	
BY:	
Mark Anderson	
Manager	





P. O. Box 1887 • 702 Gregg Drive • Buena Vista CO 81211 Phone: (719) 395-3790 Fax: (719) 395-3794

Exhibit 2— Coordinates of Proposed Mine and Access Location





P. O. Box 1887 • 702 Gregg Drive • Buena Vista CO 81211 Phone: (719) 395-3790 Fax: (719) 395-3794

## Exhibit 3— Signed CDOT State Highway Access Permit

COLORADO DEPARTMENT OF TRA					CDOT Permit No.	
STATE HIGHWAY		-			520022	
OTATE INCHINAL A	100L0	O I LIXIVIII			State Highway No / Mp / Side 050A / 212.62 / Left	
Permit Fee \$300.00	Date	e of Transmittal	Region / Section / Patrol 5 / 07 / 17	/ Name	Local Jurisdiction Chaffee County	
The Permittee(s):		•	The Applicant(s):			
Frank Holman 14110 CR 140 Salida, Colorado 81201 (719) 539-9138		,   	Blake Bennetts ACA Products, Inc. PO Box 1887 Buena Vista, Colorado 8 (719) 395-3790	31211		
is hereby granted permission to have accordance with this permit, including by the Issuing Authority if at any time appointed agents and employees shall the permit.	the State Hig the permitted Il be held harr	hway Access Code and a access and its use violate mless against any action f	any attachments, terms, con e any parts of this permit. The for personal injury or proper	nditions and e he issuing au rty damage su	xhibits. This permit may be revoked thority, the Department and their duly stained by reason of the exercise of	
Location: Access to be located of	on the North	side of State Highway	050, a distance of appro	oximately 32	74 feet East from Milepost 212.	
Access to Provide Service to:	(Land Use Co	ode)	(	(Size)	(Units)	
	991 - Gra	vel Pit		191.98	Acres	
Additional Information:  * See attached pages 2-3 of Form	n 101, and a	all other attachments, e	enclosures, and exhibits	for additiona	Il terms and conditions. *	
MUNICIPALITY OR COUNTY Required only when the appro	_		suing authority.			
Signature N/A	Print N		Date		Title	
Upon the signing of this permit the permittee agrees to the terms and conditions and referenced attachments contained herein. All construction shall be completed in an expeditious and safe manner and shall be finished within 45 days from Initiation. The permitted access shall be completed in accordance with the terms and conditions of the permit prior to being used.						
The permittee shall contact schedule a pre-construction	-			-		
The person signing as the permittee n accept the permit and its terms and co	nust be the ov	, ,				
Permittee Signature	DocuSigned by:			Date 6/1/2020   5:35 PM MDT		
Applicant Signature  Blake Bennetts		Print Name Blake Bennetts		Date 5/27/202	)20   9:59 AM PDT	
This permit is not valid until sig			sentative of the Depa	rtment.		
Signature Julie Constan	Print Name				Date (of issue) 6/4/2020   1:56 PM MDT	

Copy Distribution:

Required: 1.Region 2.Applicant

3.Staff Access Section 4.Central Files

Make copies as necessary for: Local Authority Inspector MTCE Patrol

Inspector Traffic Engineer Previous editions are obsolete and may not be used Page 1 of 3 CDOT Form #101 5/07

# State Highway Access Permit Form 101, Page 2

The following paragraphs are excerpts of the State Highway Access Code. These are provided for your convenience but do not alleviate compliance with all sections of the Access Code. A copy of the State Highway Access Code is available from your local issuing authority (local government) or the Colorado Department of Transportation (Department). When this permit was issued, the issuing authority made its decision based in part on information submitted by the applicant, on the access category which is assigned to the highway, what alternative access to other public roads and streets is available, and safety and design standards. Changes in use or design not approved by the permit or the issuing authority may cause the revocation or suspension of the permit.

#### **APPEALS**

- 1. Should the permittee or applicant object to the denial of a permit application by the Department or object to any of the terms or conditions of a permit placed there by the Department, the applicant and permittee (appellant) have a right to appeal the decision to the [Transportation] Commission [of Colorado]. To appeal a decision, submit a request for administrative hearing to the Transportation Commission of Colorado within 60 days of transmittal of notice of denial or transmittal of the permit for signature. Submit the request to the Transportation Commission of Colorado, 4201 East Arkansas Avenue, Denver, Colorado 80222-3400. The request shall include reasons for the appeal and may include changes, revisions, or conditions that would be acceptable to the permittee or applicant.
- 2. Any appeal by the applicant or permittee of action by a local issuing authority shall be filed with the local authority and be consistent with the appeal procedures of the local authority.
- 3. In submitting the request for administrative hearing, the appellant has the option of including within the appeal a request for a review by the Department's internal administrative review committee pursuant to [Code] subsection 2.10. When such committee review is requested, processing of the appeal for formal administrative hearing, 2.9(5) and (6), shall be suspended until the appellant notifies the Commission to proceed with the administrative hearing, or the appellant submits a request to the Commission or the administrative law judge to withdraw the appeal. The two administrative processes, the internal administrative review committee, and the administrative hearing, may not run concurrently.
- 4. Regardless of any communications, meetings, administrative reviews or negotiations with the Department or the internal administrative review Committee regarding revisions or objections to the permit or a denial, if the permittee or applicant wishes to appeal the Department's decision to the Commission for a hearing, the appeal must be brought to the Commission within 60 days of transmittal of notice of denial or transmittal of the permit.

#### PERMIT EXPIRATION

1. A permit shall be considered expired if the access is not under construction within one year of the permit issue

date or before the expiration of any authorized extension. When the permittee is unable to commence construction within one year after the permit issue date, the permittee may request a one year extension from the issuing authority. No more than two one-year extensions may be granted under any circumstances. If the access is not under construction within three years from date of issue the permit will be considered expired. Any request for an extension must be in writing and submitted to the issuing authority before the permit expires. The request should state the reasons why the extension is necessary, when construction is anticipated, and include a copy of page 1 (face of permit) of the access permit. Extension approvals shall be in writing. The local issuing authority shall obtain the concurrence of the Department prior to the approval of an extension, and shall notify the Department of all denied extensions within ten days. Any person wishing to reestablish an access permit that has expired may begin again with the application procedures. An approved Notice to Proceed, automatically renews the access permit for the period of the Notice to Proceed.

#### CONSTRUCTION

- 1. Construction may not begin until a Notice to Proceed is approved. (Code subsection 2.4]
- 2. The construction of the access and its appurtenances as required by the terms and conditions of the permit shall be completed at the expense of the permittee except as provided in subsection 2.14. All materials used in the construction of the access within the highway right-of-way or on permanent easements, become public property. Any materials removed from the highway right-of-way will be disposed of only as directed by the Department. All fencing, guard rail, traffic control devices and other equipment and materials removed in the course of access construction shall be given to the Department unless otherwise instructed by the permit or the Department inspector.
- 3. The permittee shall notify the individual or the office specified on the permit or Notice to Proceed at least two working days prior to any construction within state highway right-of-way. Construction of the access shall not proceed until both the access permit and the Notice to Proceed are issued. The access shall be completed in an expeditious and safe manner and shall be finished within 45 days from initiation of construction within the highway right-of-way. A construction time extension not to exceed 30 working days may be requested from the individual or office specified on the permit.
- 4. The issuing authority and the Department may inspect the access during construction and upon completion of the access to ensure that all terms and conditions of the permit are met. Inspectors are authorized to enforce the conditions of the permit during construction and to halt any activities within state right-of-way that do not comply with the provisions of the permit, that conflict with concurrent highway construction or maintenance work, that endanger highway property, natural or cultural resources protected by law, or the health and safety of workers or the public.
- 5. Prior to using the access, the permittee is required to complete the construction according to the terms and conditions of the permit. Failure by the permittee to abide

by all permit terms and conditions shall be sufficient cause for the Department or issuing authority to initiate action to suspend or revoke the permit and close the access. If in the determination of the Department or issuing authority the failure to comply with or complete the construction requirements of the permit create a highway safety hazard, such shall be sufficient cause for the summary suspension of the permit. If the permittee wishes to use the access prior to completion, arrangements must be approved by the issuing authority and Department and included in the permit. The Department or issuing authority may order a halt to any unauthorized use of the access pursuant to statutory and regulatory powers. Reconstruction or improvement of the access may be required when the permittee has failed to meet required specifications of design or materials. If any construction element fails within two years due to improper construction or material specifications, the permittee shall be responsible for all repairs. Failure to make such repairs may result in suspension of the permit and closure of the access.

- 6. The permittee shall provide construction traffic control devices at all times during access construction, in conformance with the M.U.T.C.D. as required by section 42-4-104, C.R.S., as amended.
- 7. A utility permit shall be obtained for any utility work within highway right-of-way. Where necessary to remove, relocate, or repair a traffic control device or public or private utilities for the construction of a permitted access, the relocation, removal or repair shall be accomplished by the permittee without cost to the Department or issuing authority, and at the direction of the Department or utility company. Any damage to the state highway or other public right-of-way beyond that which is allowed in the permit shall be repaired immediately. The permittee is responsible for the repair of any utility damaged in the course of access construction, reconstruction or repair.
- 8. In the event it becomes necessary to remove any rightof-way fence, the posts on either side of the access shall be securely braced with an approved end post before the fence is cut to prevent any slacking of the remaining fence. All posts and wire removed are Department property and shall be turned over to a representative of the Department.
- 9. The permittee shall ensure that a copy of the permit is available for review at the construction site at all times. The permit may require the contractor to notify the individual or office specified on the permit at any specified phases in construction to allow the field inspector to inspect various aspects of construction such as concrete forms, subbase, base course compaction, and materials specifications. Minor changes and additions may be ordered by the Department or local authority field inspector to meet unanticipated site conditions.
- 10. Each access shall be constructed in a manner that shall not cause water to enter onto the roadway or shoulder, and shall not interfere with the existing drainage system on the right-of-way or any adopted municipal system and drainage plan..
- 11. By accepting the permit, permittee agrees to save, indemnify, and hold harmless to the extent allowed by law,

the issuing authority, the Department, its officers, and employees from suits, actions, claims of any type or character brought because of injuries or damage sustained by any person resulting from the permittee's use of the access permit during the construction of the access.

#### CHANGES IN ACCESS USE AND PERMIT VIOLATIONS

- 1. It is the responsibility of the property owner and permittee to ensure that the use of the access to the property is not in violation of the Code, permit terms and conditions or the Act. The terms and conditions of any permit are binding upon all assigns, successors-in-interest, heirs and occupants. If any significant changes are made or will be made in the use of the property which will affect access operation, traffic volume and or vehicle type, the permittee or property owner shall contact the local issuing authority or the Department to determine if a new access permit and modifications to the access are required.
- 2. When an access is constructed or used in violation of the Code, section 43-2-147(5)(c), C.R.S., of the Act applies. The Department or issuing authority may summarily suspend an access permit and immediately order closure of the access when its continued use presents an immediate threat to public health, welfare or safety. Summary suspension shall comply with article 4 of title 24, C.R.S.

#### **MAINTENANCE**

1. The permittee, his or her heirs, successors-in-interest, assigns, and occupants of the property serviced by the access shall be responsible for meeting the terms and conditions of the permit, the repair and maintenance of the access beyond the edge of the roadway including any cattle guard and gate, and the removal or clearance of snow or ice upon the access even though deposited on the access in the course of Department snow removal operations. Within unincorporated areas the Department will keep access culverts clean as part of maintenance of the highway drainage system. However, the permittee is responsible for the repair and replacement of any accessrelated culverts within the right-of-way. Within incorporated areas, drainage responsibilities for municipalities are determined by statute and local ordinance. The Department will maintain the roadway including auxiliary lanes and shoulders, except in those cases where the access installation has failed due to improper access construction and/or failure to follow permit requirements and specifications in which case the permittee shall be responsible for such repair. Any significant repairs such as culvert replacement, resurfacing, or changes in design or specifications, requires authorization from the Department.

Form 101, Page 3

#### **State Highway Access Permit**

Page - 101a

#### **Worker Safety and Health**

All workers within the State Highway right of way shall comply with their employer's safety and health policies/procedures, and all applicable U.S. Occupational Safety and Health Administration (OSHA) regulations – including, but not limited to the applicable sections of 29 CFR Part 1910 – Occupational Safety and Health Standards and 29 CFR Part 1926 – Safety and Health Regulations for Construction.

Personal protective equipment (e.g. head protection, footwear, high visibility apparel, safety glasses, hearing protection, respirators, gloves, etc.) shall be worn as appropriate for the work being performed, and as specified in regulation. At a minimum, all workers in the State Highway right of way, except when in their vehicles, shall wear the following personal protective equipment:

- Head protection that complies with the ANSI Z89.1-1997 standard;
- At all construction sites or whenever there is danger of injury to feet, workers shall comply with OSHA's PPE requirements for foot protection per 29 CFR 1910.136, 1926.95, and 1926.96;
- High visibility apparel as specified in the Traffic Control provisions of this permit (at a minimum, ANSI/ISEA 107-1999, Class 2).

Where any of the above-referenced ANSI standards have been revised, the most recent version of the standard shall apply.

#### **Environmental Clearance**

It is the applicant's responsibility to contact the appropriate agencies and obtain all environmental clearances that apply to their activities. Such clearances may include but are not limited to Corps of Engineers 404 Permits or Colorado Discharge Permit System permits, or ecological, archeological, historical, or cultural resource clearances. The CDOT Environmental Clearances Information Summary presents contact information for agencies administering certain clearances and information about prohibited discharges; copy attached.

#### <u>LEVEL 3 - ACCESS PERMIT TERMS & CONDITIONS</u> FULL-MOVEMENT ACCESS WITH AUXILIARY LANES

#### A. PERMIT REQUIREMENTS SPECIFIC TO THIS ACCESS:

- 1. <u>Permit Number 520022</u> is issued by the Colorado Department of Transportation (CDOT) in accordance with the 1998 Access Code and is based upon the information submitted by the Permittee.
  - a. Any changes in the herein permitted type and use and/or volume of traffic using the access, drainage, or other operational aspects shall render this permit void, requiring that a new application be submitted for review based upon currently existing and anticipated future conditions.
  - b. Upon completion of the improvements identified in this permit, Permit Number 520022 shall replace and void all previous access permits for this location.
  - c. If the requirements of this Permit are not satisfied or this Permit expires, the access rights will revert to the access permit issued prior to this permit. If there is no valid prior permit then the access rights and uses shall revert to the historic use.
  - d. This permit is not valid unless the land use(s) enumerated herein have been approved by the local (City/County) Land Use Planning Authority.
- 2. Permit Number **520022** is issued for the **construction and use** of:
  - a. A <u>Paved Full-Movement access</u> on <u>State Highway 050</u> for <u>Frank Holman/ACA</u> **Products, Inc.** at approximate mile marker 212.62 Left.
  - b. A <u>left turn ingress deceleration lane</u> from <u>eastbound State Highway 050 into the access.</u> Details for this lane shall be submitted by Permittee/Applicant in Exhibit "B," <u>Reserved (Designs Plans) and approved by CDOT prior to construction.</u>
  - c. A <u>right turn ingress deceleration lane</u> from <u>westbound State Highway 050 into the access. Details for this lane shall be submitted by Permittee/Applicant in Exhibit "B," Reserved (Designs Plans) and approved by CDOT prior to construction.</u>
- 3. The access shall be **Paved a distance of 50 feet** from the edge of traveled way and may be paved or gravel surfaced any remaining distance within State Highway ROW. The access shall have a width of **35 feet** and radius of **50 feet**.
- 4. The access shall be <u>perpendicular</u> to the travel lanes of the State Highway for a minimum distance of <u>40 feet from the edge of pavement or to the ROW, whichever is furthermost.</u>
  <u>It shall slope down and away</u> from the adjacent pavement edge at a rate of <u>two percent (2%)</u> for a minimum of <u>20 feet</u>, then not to exceed <u>eight percent (8%)</u> grade up or down to the ROW line.
- 5. <u>Temporary Traffic Control, with prior written approval by CDOT,</u> is required at all times during construction of the access in accordance with the <u>Traffic Control Plan (TCP)</u> and corresponding Methods of Handling Traffic (MHT). The <u>MHT's shall be developed and implemented</u> by a <u>Traffic Control Supervisor (TCS) certified</u> by the

# <u>American Traffic Safety Services Association (ATSSA)</u> or the <u>Colorado Contractors</u> Association (CCA).

- 6. The category for this section of Highway <u>050</u> is <u>R-A.</u> The access shall be in conformance with the State of Colorado State Highway Access Code, Volume Two, Code of Colorado Regulations 601-1, August 31, 1998 as amended.
- 7. The access shall serve a tract of land located in Section 1, Township 49 North, Range 8 West, N.M.P.M., Chaffee County, Colorado; also known as 14100 County Road 140, Salida, CO 81201.
- 8. Incorporated as part of this permit are the following:
  - a. State Highway Access Permit pages 1-3 and Page 101a
  - b. Access Permit Terms and Conditions Pages 1 through 12
  - c. EXHIBIT "A," (Traffic Impact Study dated April 7, 2020)
  - d. **EXHIBIT "B," Reserved** (Plans).
  - e. CDOT Late Fall, Winter and Spring Special Provisions for Access Construction and Utility Installations
  - f. CDOT Environmental Clearances Information Summary
  - g. Water Quality Program Summary
  - h. State Highway Access Permit Application (CDOT Form No. 137) received **February 21**, **2020.**
- 9. This Permit describes the access and improvements that will serve the following land uses:
  - a. 191.98 Acre Gravel Pit (ITE Code 991).
- 10. This permit is only for the purpose stated herein. Any changes in the type, use and/or volume of traffic using the access will require a new permit.
- 11. The maximum traffic generation to **SH 050** for the development listed in **9.a.** above is as follows:
  - a. ACA Products, Inc. gravel pit shall generate no more than a maximum of <u>228</u> daily new external vehicle trips, <u>50</u> AM Peak Hour movements, and <u>50</u> PM Peak Hour movements as identified in <u>EXHIBIT "A,"</u>.
- 12. If any future development impacts this State Highway connection, CDOT will review the changes and shall determine if a traffic impact study is needed. CDOT will make the determination based on the potential degradation of the access below an acceptable level of service "C" for the classification of **SH 050** of **National Truck Route** in **Mountainous** terrain. If in the sole judgment of CDOT a new traffic impact study is needed, it shall be completed at no cost to CDOT and the new development shall be required to mitigate any impacts revealed by the traffic impact study.
- 13. At the access location, <u>SH 050</u> has a posted speed limit of <u>65 mph</u> with approximate <u>6:1</u> <u>foreslopes</u> and a daily traffic volume of <u>3,000</u> AADT, which correlates to a minimum Clear

Zone of <u>28</u> feet from the edge of traveled way. The Permittee/Contractor shall take the minimum Clear Zone into consideration during the design and construction of the access.

#### 14. All required access improvements will be installed prior to any use of this access.

- 15. "Right-of-Way" means the entire width between the boundary lines of every way publicly maintained when any part thereof is open to the use of the public for purposes of vehicular travel or the entire width of every way declared to be a public highway by any law of this state.
- 16. Internal site circulation and parking must be adequate to serve the land uses described here.
- 17. No backing into the Right-of-Way will be allowed under any circumstances.
- 18. No parking within the Right-of-Way will be allowed under any circumstances.
- 19. Both backing into the Right-of-Way and parking within the Right-of-Way are considered to be traffic offenses and can be ticketed by any law enforcement officer of the jurisdiction in which the access is located.
- 20. Any violation of the above provisions may be grounds for revocation by the Department of this access permit and may result in physical closure of the access.

#### B. <u>REQUIREMENTS PRIOR TO SUBMISSION OF DESIGN PLANS:</u>

- 1. Plan development shall include:
- a. Design Scoping prior to beginning design, the permittee and their Design Engineer shall schedule a scoping with **CDOT prior to design commencing.**
- b. Once 30% Design is achieved, the permittee and their Design Engineer shall schedule a Field Initial Review of the plans, specifications and Estimate (PS&E) package with CDOT.
- c. Once 90% Design is achieved the permittee and their Design Engineer shall schedule a Final Office Review of the PS&E package with CDOT.
- d. Once FOR comments are incorporated, the permittee/design engineer shall submit a final PS&E package for approval by CDOT.

#### C. REQUIREMENTS PRIOR TO NOTICE-TO-PROCEED (NTP) FOR CONSTRUCTION:

1. It is the responsibility of the Permittee/Applicant to determine which <u>environmental clearances</u> and/or regulations apply to the project, and to obtain any clearances that are required directly from the appropriate agency. Please refer to "CDOT Environmental Clearance Information Summary" for details. <u>FAILURE TO COMPLY WITH REGULATORY REQUIREMENTS MAY RESULT IN SUSPENSION OR REVOCATION OF THE CDOT ACCESS PERMIT, OR ENFORCEMENT ACTIONS BY OTHER AGENCIES.</u>

Prior to the request for Notice-to-Proceed (NTP), you must first contact CDOT's Environmental Specialist at 970-385-1425, and provide the necessary environmental clearances as identified in the Permit Terms & Conditions and Permit Attachments. This office will not issue a Notice-to-Proceed (NTP) without written Environmental Clearance Certification.

- 2. A <u>written request for a Notice to Proceed</u> must be submitted to this issuing office along with the following items. Only after the Permittee complies with items a through 1 of this section will a <u>Notice-to-Proceed (NTP)</u> be issued to allow the commencement of construction.
  - a. The Permittee shall provide <u>written approval</u> from the Local Authority for the proposed land use that will be served by the access. Granting of an access permit in no way implies CDOT concurrence or non-concurrence with the Permittee's proposed land use.
  - b. Once the Land Use has been approved by the Local Authority, the Permittee will furnish the Colorado Department of Transportation (CDOT) one (1) electronic set of design plans for review. These plans must be scaled to 11x17" paper.
  - c. The design plans shall show the existing highway ROW, property lines and easements, as determined by a Professional Land Surveyor, for the entire length of the access improvements along the highway. If the proposed improvements along the highway encroach on the existing ROW or easements, ROW plans are required for the dedication and/or acquisition of the necessary ROW/easements. The permitee shall request a ROW plan coordination meeting with the Region 5 Access Manager prior to developing any ROW plans. No grading, construction, structures or toes of slopes necessary for site development shall be placed within CDOT ROW.
  - d. Once accepted, CDOT will sign the plans as approved. Once approved, the design plans will become final and labeled EXHIBIT "B," (Plans) and incorporated as part of this permit. The access approach and all related highway improvements will be constructed in accordance with the approved final design plans. The remainder of the terms and conditions of this permit shall refer to the final design plans as EXHIBIT "B," reserved. If the Permittee wishes a waiver from the design standards the request shall be in conformance with section 4.12 of the State Highway Access Code utilizing CDOT Form No. 112. CDOT may or may not approve the waiver. CDOT will only issue a NTP for approved designs.
  - e. The Permittee shall provide documentation showing that current (less than 1 year old) CDOT approved <u>mix designs</u> will be used for Hot Mix Asphalt (HMA) and Concrete as well as documentation listing the sources of materials for use on the project. The documentation shall be submitted to the CDOT Region 5 Access Manager for verification a minimum of five (5) working days prior to the requested NTP date. A NTP shall <u>NOT</u> be issued <u>PRIOR</u> to obtaining approval for all materials from the Region Materials Engineer (RME).

- f. The Permittee shall provide a <u>Traffic Control Plan (TCP)</u> which will be <u>submitted as part of the aforementioned design plans.</u> The TCP shall include the typical applications (which may be a reference to one or more of the cases illustrated in the MUTCD or in the CDOT S Standard Plans) showing the different phases of construction, the locations of signs, signals, and pavement marking. A tabulation of necessary pavement markings, signing quantities, schedule of construction traffic control devices and project specifications are also required. In addition to the TCP, the actual <u>Methods of Handling Traffic (MHT)</u> shall be submitted by the <u>Traffic Control Supervisor (TCS)</u> at the pre-construction conference. Any additional MHT's required during the course of construction <u>shall be submitted</u> to the Region 5 Access Manager for review and acceptance <u>a minimum of three (3) working days prior to the desired implementation date.</u> Traffic Control of any nature will not be allowed unless authorized in writing by CDOT.
- g. A <u>Performance Bond</u> to CDOT shall be required to be in place to insure completion of the required highway improvements in conformance with all CDOT standards and specifications. The bond must be in the amount of at least 110% of the cost of the construction. A Cost Estimate certified by the Engineer and a draft of the bond must be provided to CDOT for review and approval by CDOT before acceptance of the final bond and before a pre-construction will be scheduled. Upon completion and acceptance of the highway improvements, CDOT will release the performance bond after an approved <u>Warranty Bond</u> in the amount of 20% of the cost of the construction is received. The warranty bond shall be held for two (2) years after the construction acceptance date.
- h. The Department will require the <u>Permittee to retain a Professional Engineer (PE)</u> to be in Responsible Charge of Construction oversight. A written confirmation from the Permittee is required to show that the requirement in this term is met.
- i. The Permittee/Contractor is required to obtain <u>Insurance</u> in conformance with Standard Specification Section 107 Responsibility for Damage Claims, Insurance Types and Coverage Limits. <u>Professional Liability insurance</u>, as <u>described in Section 107</u>, is <u>required for the design plans, design and construction surveying, as well as for the Professional Engineer in responsible Charge of Construction oversight.</u> Copies of insurance coverage will be submitted to the Region 5 Access Manager prior to the issuing of the NTP or approving the Design Plans <u>EXHIBIT "B"</u> reserved. A copy of the insurance policy is required to be available at the construction site at all times for inspection.
- j. A <u>Construction Schedule</u> detailing the execution of the project shall be submitted to the Region 5 Access Manager prior to scheduling the pre-construction conference.
- k. A <u>pre-construction conference</u> is required prior to the issuance of the NTP. It is the responsibility of the Permittee to schedule and coordinate this meeting. At least five (5) working days prior to the pre-construction conference the Permittee will submit the following packet of information to CDOT for review:

Permit Number 520022

State Highway 050, Milepost 212.62 Left

ACA Products, Inc. Access with Auxiliary Lanes

- a. Baseline Construction Schedule
- b. Material Submittals
- c. Asphalt and Concrete Mix Designs
- d. Methods of Handling Traffic
- e. Performance Bond
- f. Liability Insurance
- g. Witten confirmation of PE for Construction
- The Permittee/Contractor must contact the Region 5 Traffic Construction Coordinator at 3803 North Main Avenue, Durango, CO or telephone (970) 385-3633 to schedule a <u>pre-construction conference</u>.

#### D. GENERAL DESIGN REQUIREMENTS:

- 1. **Design of improvements** within the highway ROW shall be in compliance with the most current editions of the following manuals and documents except as indicated:
  - a. CDOT Design Guide
  - b. CDOT Drainage Design Manual
  - c. CDOT Standard Plans M&S Standards
  - d. AASHTO Roadside Design Guide
  - e. AASHTO Policy on Geometric Design of Highways and Streets
  - f. CDOT Standard Specifications for Road and Bridge Construction
  - g. CDOT Standard Special Provisions
  - h. Manual on Uniform Traffic Control Devices (MUTCD)
  - i. 1998 State Highway Access Code, Volume 2, Code of Regulations 601-1, as amended
  - j. ITE Traffic Engineering Handbook
  - k. ITE Trip Generation Manual, 6th Edition
  - 1. 2011 CDOT CAD Manual

# 2. No grading, construction, structures or toes of slopes necessary for site development shall be placed within CDOT ROW.

- 3. The design standards listed under item 1 of this section will override the final design plans, **EXHIBIT "B,"** reserved should an oversight, omission or conflict occur.
- 4. CDOT assumes no liability or responsibility whatsoever for the accuracy, completeness or correctness of the Permittee's final design plans, **EXHIBIT "B,"** reserved. Any design errors are the sole responsibility of the Permittee and their Engineer.
- 5. Permittee is required to comply with the <u>Americans with Disabilities Act Accessibility Guidelines (ADAAG)</u> that have been adopted by the U.S. Architectural and Transportation Barriers Compliance Board (Access Board), and incorporated by the U.S. Attorney General as a federal standard. These guidelines are defining traversable slope requirements and prescribing the use of a defined pattern of truncated domes as detectable warnings at street

crossings. The current Standard Plans reflect these requirements.

- 6. It is the responsibility of the Permittee/Applicant to determine which <u>environmental</u> <u>clearances</u> and/or regulations apply to the project, and to obtain any clearances that are required directly from the appropriate agency. Please refer to "CDOT Environmental Clearance Information Summary" for details. <u>FAILURE TO COMPLY WITH REGULATORY REQUIREMENTS MAY RESULT IN SUSPENSION OR REVOCATION OF THE CDOT ACCESS PERMIT, OR ENFORCEMENT ACTIONS BY OTHER AGENCIES.</u>
- 7. ALL discharges are subject to the provisions of the Colorado Water Quality Control Act and the Colorado Discharge Permit Regulations. Prohibited discharges include substances such as: wash water, paint, automotive fluids, solvents, oils or soaps.
- 8. Unless otherwise identified by CDOT or the Colorado Department of Public Health and Environment (CDPHE) Water Quality Control Division (WQCD) as not being a source of pollutants to the waters of the State, the following discharges to storm water systems are allowed without a Colorado Discharge Permit System permit: landscape irrigation, diverted stream flows, uncontaminated ground water infiltration to separate storm sewers, discharges from potable water sources, foundation drains, air conditioning condensation, irrigation water, springs, footing drains, water line flushing, flows from riparian habitats and wetlands, and flow from firefighting activities, and water incidental to street sweeping (including associated sidewalks and medians) and that is not associated with construction. Discharges from these sources may still require separate CDPS permit coverage to be obtained by the discharger.
- ANY OTHER DISCHARGES may require Colorado Discharge Permit(s) or separate permits from CDPHE or the appropriate agency before work begins. For additional information and forms, go to the CDPHE website at: <a href="http://www.cdphe.state.co.us/wq/PermitsUnits/wqcdpmt.html">http://www.cdphe.state.co.us/wq/PermitsUnits/wqcdpmt.html</a> or contact the CDOT Water Quality Program Manager at 303-757-9343.
- 10. Discharges may also be subject to additional State and Local restrictions, such as MS4 (Municipal Separate Storm Water Sewerage Systems) requirements for permanent sediment control, TMDL (Total Maximum Daily Limit), TMAL (Total Maximum Annual Limit) or discharge.
- 11. Any removal of existing fence, in excess of opening required for the access, or installation of a fence that is erected adjacent to the highway ROW requires a separate CDOT Fencing Agreement. All fencing described by the CDOT Fencing Agreement shall be shown in the design plans.
- 12. <u>Any landscaping</u> within CDOT ROW requires a separate <u>CDOT Landscaping Permit</u>. All landscaping described by the CDOT Landscaping Permit shall be shown in the design plans.

13. <u>Any Utility work</u> within CDOT ROW requires a separate <u>CDOT Utility Permit</u>. All utilities and utility work described by the CDOT Utility Permit shall be shown in the design plans.

#### E. DRAINAGE DESIGN REQUIREMENTS:

- 1. No site drainage from the constructed access shall enter onto the traveled way of the highway.
- Drainage to the State Highway Right-of-Way shall not exceed the historical undeveloped rate of flow. Detention ponds may be required to control drainage flow from developed properties at or below historical flow rates.
- 3. Any drainage study shall consider and the design reflect the 25 year flood for rural two lane highways, 50 year flood for four lane highways, and 100 year flood in all urban areas.
- 4. Required Cross Culverts under the State Highway, Side Drain Culverts under the Access, Curb, Gutter, Inlets, Manholes, Sidewalk and Driveways shall conform to CDOT Standards and facilitate proper drainage along the State Highway. Culvert ends not contained within manholes or inlets shall be fitted with standard end sections. The Drainage design shall be included in **EXHIBIT "B,"** reserved.

#### F. PAVEMENT DESIGN REQUIREMENTS:

- a. Pavement design materials shall conform with:
  - a. Section 304 Aggregate Base Course (ABC) Class 1 or 2 and Class 6, with resistance values of at least 70 and 78 respectively when tested by the Hveem Stabilometer method.
  - b. Section 403 Hot Mix Asphalt Grading S or SX.
  - c. Section 412 & 601 Concrete Pavement Class P = 4,200 psi
- b. The permittee/applicant is responsible for submitting a pavement design for improvements within current or proposed CDOT ROW. At its discretion, CDOT may provide the pavement design required for the improvements.

#### G. FINAL STABILIZATION REQUIREMENTS:

- 1. Topsoil, seeding, fertilizer and mulching shall be required within the ROW limits on all disturbed areas not surfaced immediately upon completion of the access.
- 2. A minimum of 4 inches of topsoil shall be placed on all slopes which are to be seeded and mulched.
- 3. The following types of seed and application rates shall be used unless a separate Landscaping

Permit Number 520022

State Highway 050, Milepost 212.62 Left

ACA Products, Inc. Access with Auxiliary Lanes

#### Permit states otherwise:

Seed Requirements:		
COMMON NAME	<b>BOTANICAL NAME</b>	LBS.
<u>PLS\ACRE</u>		
Western Wheatgrass (V. Arriba)	Pascopyrum Smithii	16
Slender Wheatgrass (V. San Luis)	Elymus Trachycaulus	6
Indian Ricegrass (V. Paloma)	Oryzopsis Hymenoides	6
Hard Fescue (V. Durar)	Festuca Ovina Duriuscula	6
Alsike Clover	Trifolium Hybridium	4
Sand Dropseed	Sporobolus Cryptandrus	0.50
Total lbs/acre		38.50

Seed shall be mechanically drilled to a depth of 0.25 or 0.5 inches into the soil on slopes flatter than 3:1. Seed shall be broadcast on slopes 3:1 or steeper and raked into soil.

#### 4. Fertilizer Requirements:

Nutrient Type	<u>% AVAILABLE</u>	<u>LBS\ACRE</u>
Nitrogen:	18	45
Phosphorus:	46	115
T (11 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1 41 COU 4 AU 1 4 11	

Fertilizer shall be incorporated to a depth of 2" to 4" into the topsoil.

5. <u>Mulching Requirements and Application:</u> 2 tons/acre straw mechanically crimped into soil on slopes flatter than 3:1. Place a soil retention blanket consisting of woven wood or straw coconut material on slopes 3:1 or steeper.

#### H. GENERAL CONSTRUCTION REQUIREMENTS:

- 1. A COPY OF THIS PERMIT AND THE VALIDATED NOTICE TO PROCEED MUST BE ON THE JOB WITH THE CONTRACTOR AT ALL TIMES OR ANY WORK ONSITE AND OFFSITE WILL BE ORDERED TO BE IMMEDIATELY SUSPENDED UNTIL THIS TERM IS COMPLIED WITH.
- 2. The PE in responsible charge of construction observation shall evaluate insure compliance with plans and specifications with regard to the roadway improvements and Traffic Control within the State Highway ROW. The PE's responsibilities shall be as defined in Section 5 of the Bylaws and Rules of The State Board of Licensure for Architects, Professional Engineers and Professional Land Surveyors and the relevant sections of the latest CDOT Standard Specifications for Road and Bridge Construction. The PE shall be experienced and competent in road and bridge construction management, inspection and materials testing.
- 3. <u>Construction Activities</u> within the highway ROW shall be in compliance with the most current editions of the following manuals:
  - a. CDOT Standard Specifications for Road and Bridge Construction
  - b. CDOT Standard Special Provisions

- c. CDOT Standard Plans M&S Standards
- d. CDOT Construction Manual
- e. CDOT Field Materials Manual
- f. CDOT Laboratory Manual of Test Procedures
- g. Manual on Uniform Traffic Control Devices (MUTCD) Part IV and the Colorado Supplement
- h. **EXHIBIT "B,"** reserved
- 4. The Permittee/Contractor is responsible for obtaining any necessary additional **Federal, State and/or City/County permits or clearances** required for construction of the access. Approval of this access permit does not constitute verification of this action by the Permittee.
- 5. The Permittee will be responsible for <u>verification of existing utility locations</u>. The Permittee must notify owners or operators of <u>underground utility facilities</u> at least two (2) business days prior to beginning excavation in the vicinity of such facilities, as required under Section 9-1.5-103, Colorado Revised Statutes. <u>Call Utility Notification Center of Colorado</u> (UNCC), <u>811</u> or 1-800-922-1987 for marking of member utilities. Call non-member utilities directly.
- 6. The Permittee/Contractor shall coordinate access construction with any utility installations.
- 7. Any damage to utilities during construction shall be the Permittee's responsibility to repair or replace the utility at no cost to the Department.
- 8. The Permittee/Contractor shall not make any changes to the access design without prior approval from the Region 5 Access Manager or other authorized Region 5 CDOT representative. If necessary, minor changes, corrections, and/or additions to this permit will be ordered by CDOT to meet unanticipated site conditions.
- 9. Any damage to any existing highway facilities shall be repaired by the Permittee prior to continuing other work.

#### I. SAFETY, WORKING TIMES AND TRAFFIC CONTROL:

- 1. CDOT reserves the right to suspend any construction activities, to include Traffic Control, that interfere with the safe operation of the State Highway. Any such suspensions shall require a written plan of action detailing how the Permittee/Contractor will prevent further safety infractions prior to recommencing construction activities.
- 2. All equipment, materials or any other non-crashworthy item shall be stored outside the clear zone during non-working times.
- 3. Existing highway signs requiring removal within the limits of the construction activities shall be removed and delivered to the CDOT Maintenance Shop for storage and future replacement by the Permittee unless otherwise agreed to by CDOT and Permittee. Installation shall be as

directed by CDOT.

- 4. The Permittee/Contractor will be responsible for keeping the State Highway travel lanes and shoulders clear of any mud or debris tracked onto it throughout construction of the access on a daily basis or as otherwise directed by CDOT.
- 5. The existing paved shoulder edge shall not be saw cut back until the future pavement is ready to be installed. The shoulder shall be saw cut a minimum of one (1) foot from the existing pavement edge to assure a straight edge for placement of adjacent asphalt material.
- 6. Any pavement drop-offs that will be left overnight shall be delineated with appropriate channelizing devices and any reasonably obtained lateral buffer space.
- 7. Any required pavement marking(s) and signing shall be installed by the Permittee/Contractor prior to opening any roadway to traffic.
- 8. The Permittee/Contractor shall comply with Revision of Section 107.06 of the CDOT Specifications regarding Safety, Health, and Sanitation Provisions.
- 9. No work within the highway ROW will be allowed on Saturdays, Sundays, legal holidays, or during periods of adverse weather conditions.
- 10. All construction activities within the state highway ROW will not be allowed to begin before sunrise and shall be required to cease prior to sunset. Traffic Control operations may begin one half hour before sunrise and continue until one half hour after sunset.
- 11. No disruption of traffic flow will be allowed during the morning (7:00 AM to 8:30 AM) and evening (4:30 PM to 6:00 PM) peak hour traffic flows, unless otherwise authorized in writing by CDOT.

#### J. FINAL PROJECT ACCEPTANCE:

- 1. Engineering Certification Submittal: Prior to final acceptance by CDOT, the PE shall certify to CDOT in writing that all inspections, materials, materials testing, and construction methods conform to the plans, specifications and purpose of the design. The certification shall be supported by the submittal of project documentation complying with the requirements of this permit. The submittal shall be sent to the Region 5 Access Manager, Colorado Department of Transportation, 3803 Main Avenue, Suite 100, Durango, Colorado 81301. The submittal shall:
  - a. Have the stamp and signature of the PE in responsible charge of construction oversight signifying that the engineering services addressed therein have been performed by the PE, or directly under the PE's supervision.
  - b. Be based upon the PE's knowledge and information regarding the project.

- c. Be in accordance with applicable standards of practice.
- 2. Upon completion of the work, the Engineer shall submit 3-sets of "As Constructed" plans showing in detail all ROW easements, construction improvements and any modifications or revisions made to the design plans during construction. All changes, modifications or revisions shall be signed and sealed by the engineer.
- 3. Final Project Acceptance will be by the Regional Transportation Director (RTD) or their authorized designee.
- 4. **Reconstruction or improvements** to the access will be required when the Permittee fails to meet the required design and/or materials specifications. If any construction element fails within two years of CDOT's final acceptance due to improper construction or materials, the Permittee is responsible for all such repairs.

Docusigned by: Frank Holman	6/1/2020   5:35 PM MD		
PERMITTEE: 36BB2C3C0D904EA	DATE		
Frank Holman			
DocuSigned by:	5/27/2020   9:59 AM PDT		
APPLICANT: Blake Bennetts	DATE		
Rlake Rennetts for $\Delta C \Delta$ Products. Inc.			

Blake Bennetts for ACA Products, Inc.

# **Traffic Impact Study**

### **ACA Products**

Highway 50 Chaffee County

Prepared For:

ACA Products PO Box 1887 Buena Vista, CO



112 Rubey Dr Ste 210 Golden, CO 80403 303-940-9966

> Fred Lantz Traffic Engineer

August 2019 Revised December 2019 Revised April 2020



ACA Products
Hwy 50
Chaffee County
Traffic Impact Study

### **Table of Contents**

1
2
2
2
3
4
4
5
5
ε
ε
7
7
8
8
g
g
g
10
10



#### Introduction

This Traffic Impact Study will address the amount of traffic that the ACA Products development is expected to generate and the impact on the roadway system. The proposed development is located on the north side of Hwy 50 east of County Road 219 and West of Poncha Springs. The property is presently vacant. Figure 1 below shows the site location.

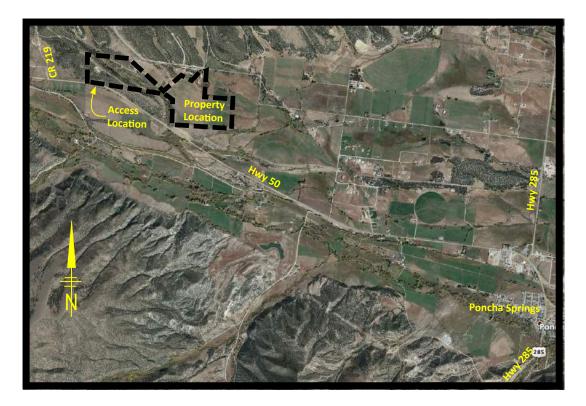


Figure 1 - Site Location

### **Existing Conditions**

Highway 50 is classified as an RA – Regional Highway with a 65 mph speed limit. It is a 2 lane roadway. All Traffic Data Services Inc. conducted a 24-hour directional traffic count on Hwy 50 at the proposed site of the development. The traffic counts were taken on Tuesday June 4, 2019. The traffic counts indicated that there were 1858 vehicles per day in the eastbound direction and 2031 vehicles per day in the westbound direction. The total for both directions was 3889 vehicles per day. The highest hours are 391



ACA Products
Hwy 50
Chaffee County
Traffic Impact Study

vehicles from 11-12 in the AM and 365 vehicles from 1-2 in the PM. These counts are consistent with CDOT's on line information in OTIS. The traffic counts are included in the appendix.

#### **Proposed Development**

The proposed development is a Sand and Gravel Pit. An access is proposed on Hwy 50 2112' east of County Road 219. Because of the type of traffic at the site, deceleration lanes are proposed along Hwy 50 at the access. The eastbound left turning volume calculated in Figure 3 will be a high of 5 passenger car equivalents per hour. While this number is less than the volume required for a left turn lane in the State Highway Access Code (>10 vehicles per hour), it was decided to include the eastbound left turn lane because of the type of vehicles normally seen at a Sand and Gravel Pit. Likewise, the westbound right turn lane is calculated at a high of 21 passenger car equivalents per hour which, is less than the 25 listed in the State Highway Access Code as the threshold requiring a right turn deceleration lane.

The length of these lanes was calculated using tables 4-5, 4-6, and 4-8 of the State Highway Access Code. Table 4-5 states that for the Access Category R-A, the left turn length is the deceleration length plus the storage. The storage length from table 4-8 is 25' as the left turning volume (5 pce's) is below 30 in the table. Table 4-6 calls for a deceleration length of 800' for 65 mph. Thus the minimum left turn lane should be 800' (deceleration) plus 25' (storage) or a total of 825'. The proposed lane is 847', which exceeds the minimum length requirement.

The westbound right turn deceleration lane only needs to include the deceleration length according to table 4-5 of the State Highway Access Code for the R-A Category. Table 4-6 indicates the deceleration of 800' for 65 mph. Thus the proposed right turn lane at 800', lequals the length required in the State Highway Access Code.

Sight distance for entering traffic will exceed the 1105' requirement for Multi-Unit Trucks as shown in Table 4-2 of State Highway Access Code.

Figure 2 below shows a sketch of the Proposed Roadway Improvements.



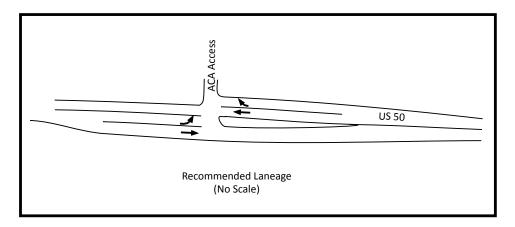


Figure 2 - Proposed Laneage at Access

#### **Trip Generation**

The trips generated by the development were estimated using the information provided by the owner as the Institute of Transportation Engineers *Trip Generation Manual, 10<sup>th</sup> Edition* does not have a listing for a Sand and Gravel Pit or a Quarry. Trips are based on the type and the number of vehicles that will be on-site. The number of large trucks is based upon the fact that the Sand and Gravel Pit can only accommodate a maximum of 6 trucks per hour. Those trips were converted to Passenger Car Equivalents by multiplying by 3 as required by the State Highway access code. A total of 3 employees are planned on-site between 7 am and 5 pm, with these trips posted during the AM and PM peak periods as well as a couple of mid-day trips. It is also estimated that there will be 100 miscellaneous trips daily that include deliveries, other employees, and visitors.

Both Daily and Peak Hour trips are estimated for the development.

Table 1 shows the number of trips that could be generated by the proposed land use broken down by trip type.



		Trips Generated - Weekday						
Trin Trung		Daily	AM Peak Hour			PM Peak Hour		
Trip Type	Unit	Daily	Enter	Exit	Total	Enter	Exit	Total
Gravel Trucks	PCE	120	18	18	36	18	18	36
Employees	Veh	8	3	1	4	1	3	4
Misc Trips	Veh	100	5	5	10	5	5	10
Total Trips		228	26	24	50	24	26	50

PCE = Passenger car equivalents (1 Truck = 3 PCE)

Veh = Vehicle

Table 1 - Development Trip Generation

As the Trip Generation Table indicates, this development is expected to generate 228 daily trips with 50 AM peak hour and 50 PM peak hour trips.

#### **Initial Traffic During AM/PM Peak Hours**

Discussions with the owner indicated that most of the traffic would come from the east. Employees will most likely live in Poncha Springs, Salida or Buena Vista. The products from the Sand and Gravel pit will also go toward the populations in Poncha Springs, Salida and Buena Vista. There will be a few trips to the west, thus a distribution of 80% to the east and 20% to the west was decided on. The AM and PM peak hour trips in the Trip Generation table were assigned to Highway 50 with 80% of the trips going to/from the east and 20% of the trips going to/from the west. The site peak hours would have the highest volume of traffic entering and leaving the development with a 7 am to 5 pm workday.

Figure 3 below shows the Site Peak Hour Trips at the access with Highway 50. The Highway 50 volumes were obtained from the traffic count that was taken on Tue June 4, 2019 for the corresponding 7 am and the 5 pm hours. These hours were selected to match the peak hours of the Sand and Gravel Pit. The Sand and Gravel Pit is ready to open as soon as they are able to obtain their access permit, so the 2019 traffic volumes are appropriate to use. CDOT counts in the area were checked and they indicate that the summer months have higher traffic volumes than the winter months.



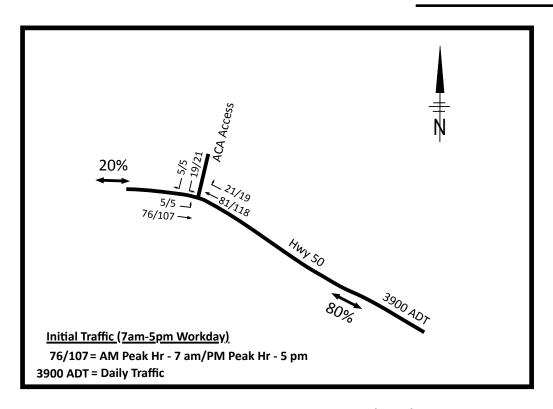


Figure 3 – Site Peak Hour Volumes (2019)

#### **Initial Traffic During the Highest Roadway Hours**

The traffic counts taken on Tue June 4, 2019 indicate the highest hours on Highway 50 occur at 11 am and 1 pm. The Sand and Gravel Pit peak hours occur at 7 am and 5 pm. Since the highest roadway hours do not coincide with the highest development hours, the development traffic was also calculated for the later morning and early afternoon highway peak hours. The employee traffic would not normally be included in these hours, just the trucks and the miscellaneous trips.

Figure 4 below shows the Trips at the access with Highway 50 during the highest highway hours. The Highway 50 volumes were obtained from the traffic count for the corresponding high am and the high pm hours.



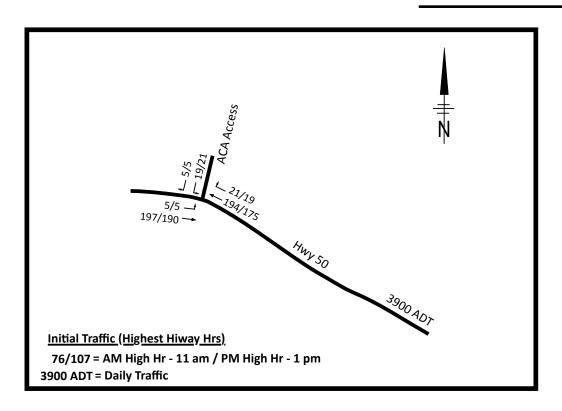


Figure 4 – Highest Highway AM and PM Hours (2019)

#### **Future Traffic During AM/PM Peak Hours**

In order to determine the impact of the development in the future, the roadway traffic was inflated using the 20 year growth rate from the CDOT OTIS web site. The 20 year factor was determined to be 1.13 for this section of Highway 50. Thus the existing volumes were inflated by the growth factor to represent the volumes that would be present in the future (20 years).

It is assumed the Sand and Gravel Pit will remain the same size. If the development increases significantly in the future, this TIS should be updated. It should also be noted that a new access permit will be needed if the site adds additional traffic.

Figure 5 below shows the Site Peak Hour Trips at the access with Highway 50. The Highway 50 volumes were obtained from the inflated traffic count for the corresponding 7 am and the 5 pm hours.



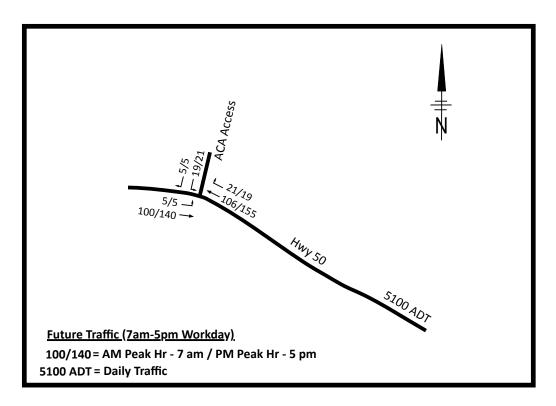


Figure 5 – Future Site Peak Hour Volumes (2039)

#### **Future Traffic During the Highest Roadway Hours**

The future traffic was calculated for the inflated highest am and pm highway hours

Figure 6 below shows the Trips at the access with Highway 50 during the future highest highway hours. The Highway 50 volumes were obtained from the inflated traffic count for the corresponding high AM and the high PM hours.



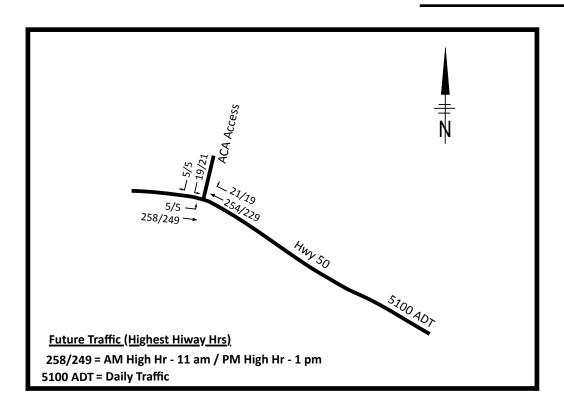


Figure 6 – Future Highest Highway AM and PM Hours (2039)

#### **LOS Analysis**

The volumes for the AM and PM peak hours and the highest AM and PM highway hours for the initial period and for the future (20 year) were entered into the computer program Synchro 10 to determine the Level of Service (LOS) at the access.

The following Table 2 summarizes the LOS for the left turn into the access and the SB access exit. The printouts are included in the appendix.

Mayamant Initial Pe		eak Hrs	K Hrs Initial High		Future Peak Hrs		Future High Hrs	
Movement	AM	PM	AM	PM	AM	PM	AM	PM
EB Left	A	A	A	Α	Α	A	A	A
SB	В	В	В	В	В	В	В	В

Table 2 - LOS



ACA Products
Hwy 50
Chaffee County
Traffic Impact Study

As the above table indicates, the traffic at the access intersection on Hwy 50 will not experience any delays with the development now or in the future. The queue lengths will be 1 vehicle or less.

#### **Conclusion and Recommendation**

The development of a Sand and Gravel Pit on Highway 50 east of CR 219 will not have any discernable impact on the traffic flow in the area with the turn lanes proposed. Because of the type and volume of traffic, deceleration lanes are proposed for the westbound right turn lane and the eastbound left turn lane even though the volumes do not meet the threshold in State Highway Access Code. The volumes at the access do not warrant acceleration lanes as specified in the Access Code.

The development will generate 228 daily trips with 50 AM peak hour trips and 50 PM peak hour trips. The peak hour trips were examined to determine the LOS at the intersection at those hours. Because the street peak hours are different than the development peak hours, the AM and PM street peak hours were also examined to determine the LOS at the intersection. The intersection will operated at LOS B and better for all periods indicating little to no delay.

Sight distance is adequate at the intersection and the location of the access was chosen to have the access at the optimal point in the horizontal curve.

#### **Appendix**

Traffic Counts
Synchro Reports



Page 1

All Traffic Data Services www.alltrafficdata.net

Site Code: 1 Station ID: HWY 50 W/O PONCHA SPRINGS

391 391 365 388 Total 2031 52.2% 11:00 194 13:00 175 WB 1858 47.8% 11:00 197 13:00 190 04-Jun-19 11:00 12:00 PM 01:00 02:00 03:00 04:00 05:00 06:00 07:00 08:00 10:00 11:00 03:00 04:00 05:00 06:00 07:00 08:00 09:00 10:00 Total Percent **AM Peak** 12:00 AM PM Peak **Grand Total** Start Time

**AADT 3,889** 

ADT

The following information can be found in the <u>Highway Capacity Manual</u>, Transportation Research Board, 2000: Chapter 10 – Urban Streets Concepts Signalized Intersections and Chapter 17 – Unsignalized Intersections.

#### **Level Of Service (LOS) for Signalized Intersections**

Levels of service are defined to represent reasonable ranges in control delay.

#### LOS A

Describes operations with low control delay, up to 10 s/veh. This LOS occurs when progression is extremely favorable and most vehicles arrive during the green phase. Many vehicles do not stop at all. Short cycle lengths may tend to contribute to low delay values.

#### LOS B

Describes operations with control delay greater then 10 and up to 20 s/veh. This level generally occurs with good progressions, short cycle lengths, or both. More vehicles stop than with LOS A, causing higher levels of delay.

#### LOS C

Describes operations with control delay greater than 20 and up to 35 s/veh. These higher delays may result from only fair progression, longer cycle lengths, or both. Individual cycle failures may begin to appear at the level. Cycle failure occurs when a given green phase does not serve queued vehicles, and overflows occur. The number of vehicles stopping is significant at this level, though many still pass through the intersection without stopping.

#### LOS D

Describes operations with control delay greater than 35 and up to 55 s/veh. At LOS D, the influence of congestion becomes more noticeable. Longer delays may result from some combination of unfavorable progression, long cycle lengths, and high v/c ratios. Individual cycle failures are frequent.

#### LOS E

Describes operations with control delay greater than 55 and up to 80 s/veh. These high delay values generally indicate poor progression, long cycle lengths, and high v/c ratios. Individual cycle failures are frequent.

#### LOS F

Describes operations with control delay in excess of 80 s/veh. This level, considered unacceptable to most drivers, often occurs with over saturation, that is, when arrival flow rates exceed the capacity of lane groups. It may also occur at high v/c ratios with many individual cycle failures. Poor progression and long cycle lengths may also contribute significantly to high delay levels.

#### Level of Service (LOS) for Unsignalized TWSC Intersections

Level of Service	Average Control Delay (s/veh)
Α	0 - 10
В	> 10 - 15
С	> 15 - 25
D	> 25 - 35
E	> 35 - 50
F	> 50

Intersection					
Int Delay, s/veh 1.	4				
Movement EB	FRT	WBT	WRR	SRI	SBR
					SDK
	<b>† † 7</b> 6	<b>↑</b>	21	<b>1</b> 9	5
	5 76 5 76	81	21		
		81 0	21	19	5
Conflicting Peds, #/hr					
Sign Control Fre RT Channelized	e Free - None		None		None
Storage Length 55		-	500	0	None -
Veh in Median Storage		0	500	0	-
_	_	0		0	
Grade, % Peak Hour Factor 9			- 02		- 02
		92	92	92	92
	2 2	2	2	50	50
Mvmt Flow	5 83	88	23	21	5
Major/Minor Major	1 N	lajor2	M	linor2	
Conflicting Flow All 11		-	0	181	88
Stage 1		-	-	88	-
Stage 2		_	_	93	_
Critical Hdwy 4.1	2 -		_	6.9	6.7
Critical Hdwy Stg 1			_	5.9	0.7
Critical Hdwy Stg 2	 	_	_	5.9	
Follow-up Hdwy 2.21				3.95	3.75
Pot Cap-1 Maneuver47			-	710	853
Stage 1	-		-	828	- 000
Stage 1		-	-	823	
<u> </u>		-	-	023	-
Platoon blocked, %	-	-	-	700	0.50
Mov Cap-1 Maneuver7		-	-	708	853
Mov Cap-2 Maneuver			-	708	-
Stage 1		-	-	826	-
Stage 2		-	-	823	-
Approach El	3	WB		SB	
HCM Control Delay, s0.		0		10.1	
HCM LOS	9	U		В	
I IOWI LOS				D	
Minor Lane/Major Mvm	t EBL	EBT	WBT '	WBRS	BLn1
Capacity (veh/h)	1479	-	-	-	734
HCM Lane V/C Ratio	0.004	-	-		0.036
HCM Control Delay (s)	7.4	-	-		10.1
HCM Lane LOS	Α	-	-	-	В
HCM 95th %tile Q(veh)		-	-	-	0.1
2 2 2 2 2 2 2 ( 1 2 1 )					

Intersection						
	1.1					
<b>3</b> ,					05:	^==
	EBL		WBT			SBR
Lane Configurations	7	<b>↑</b>	<b>↑</b>	7	Y	
Traffic Vol, veh/h	5	107	118	19	21	5
Future Vol, veh/h	5	107	118	19	21	5
Conflicting Peds, #/h	ır 0	0	0	0	0	0
		Free	Free	Free	Stop	Stop
RT Channelized		None		None		None
	550	-	-	500	0	-
Veh in Median Stora		9 0	0	_	0	-
Grade, %	go, <i>n</i> -	0	0	_	0	_
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	50	50
Mvmt Flow	5	116	128	21	23	5
IVIVIIIL FIOW	Э	110	128	21	23	Э
Major/Minor Maj	jor1	M	lajor2	M	linor2	
Conflicting Flow All		0	_	0	254	128
Stage 1		-	_	-	128	-
Stage 2	_	_	_	_	126	_
	- 1.12	-	-	-	6.9	6.7
_		-	-	-		
Critical Hdwy Stg 1	-	-	-	-	5.9	-
Critical Hdwy Stg 2	-	-	-	-	5.9	- 75
Follow-up Hdwy 2.2			-	-	3.95	3.75
Pot Cap-1 Maneuver	432	-	-	-	642	808
Stage 1	-	-	-	-	792	-
Stage 2	-	-	-	-	794	-
Platoon blocked, %		-	-	-		
Mov Cap-1 Maneu√e	<b>4</b> 32	-	-	-	640	808
Mov Cap-2 Maneuve	er -	-	-	-	640	-
Stage 1	-	-	-	-	790	-
Stage 2	-	_	_	-	794	_
2.5.90 =						
Approach	EB		WB		SB	
HCM Control Delay,	<b>\$</b> 0.3		0		10.6	
HCM LOS					В	
						<b>.</b> .
Minor Lane/Major M		EBL	EBT	WBT '		
Capacity (veh/h)		1432	-	-	-	667
HCM Lane V/C Ratio	) (	0.004	-	-	-	0.042
HCM Control Delay (		7.5	-	-	-	10.6
HCM Lane LOS	. ,	Α	-	-	-	В
HCM 95th %tile Q(ve	eh)	0	_	-	-	
	/					J.,

Intersection					
Int Delay, s/veh 0.8					
	- CDT	WDT	WEE	CDI	CDD
Movement EBL			WBR		SRK
Lane Configurations			7	Y	
Traffic Vol, veh/h 5			21	19	5
Future Vol, veh/h 5		194	21	19	5
Conflicting Peds, #/hr 0		0	0	0	0
	Free	Free	Free	Stop	Stop
	None	-	None	-	None
Storage Length 550	-	-	500	0	-
Veh in Median Storage,-	# 0	0	-	0	-
Grade, %	_	0	-	0	-
Peak Hour Factor 92	92	92	92	92	92
Heavy Vehicles, % 2		2	2	50	50
Mvmt Flow 5			23	21	5
				-	
Major/Minor Major1		/lajor2	M	linor2	
Conflicting Flow All 234	. 0	-	0	435	211
Stage 1 -	-	-	-	211	-
Stage 2 -	-	-	-	224	-
Critical Hdwy 4.12	_	-	-	6.9	6.7
Critical Hdwy Stg 1 -	-	-	-	5.9	-
Critical Hdwy Stg 2 -	_	_	_	5.9	-
Follow-up Hdwy 2.218		_	-	3.95	3.75
Pot Cap-1 Maneuver333		_	_	498	722
Stage 1 -	_	_	_	722	-
Stage 2 -			-	712	_
Platoon blocked, %	<u>-</u>	-		112	_
Mov Cap-1 Maneuve333		-	-	496	722
· ·		-			
Mov Cap-2 Maneuver -		-	-	496	-
Stage 1 -		-	-	719	-
Stage 2 -	-	-	-	712	-
Approach EB		WB		SB	
HCM Control Delay, \$0.2		0		12.1	
HCM LOS		U		12.1 B	
HOW LOS				D	
Minor Lane/Major Mvmt	EBL	EBT	WBT '	WBRS	BLn1
Capacity (veh/h)	1333		_		531
HCM Lane V/C Ratio	0.004		_		0.049
HCM Control Delay (s)	7.7		_		12.1
HCM Lane LOS	Α		-	_	12.1 B
	~				
HCM 95th %tile Q(veh)	0	_	_	_	0.2

Intersection						
Int Delay, s/veh	0.8					
Movement	EBL	ERT	WBT	\M/RD	SBI	SBR
						SDK
Lane Configuration		100	475	10	74	_
Traffic Vol, veh/h	5	190	175	19	21	5
Future Vol, veh/h	5	190	175	19	21	5
Conflicting Peds, #		_ 0	_ 0	_ 0	0	0
Sign Control			Free		Stop	
RT Channelized		Stop		None		None
Storage Length	550	_	-	500	0	-
Veh in Median Stor	•		0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	50	50
Mvmt Flow	5	207	190	21	23	5
Major/Minor M	oior1	N /	laiara	N /	linor2	
	ajor1		lajor2			400
Conflicting Flow All		0	-	0	407	190
Stage 1	-	-	-	-	190	-
Stage 2	-	-	-	-	217	
Critical Hdwy	4.12	-	-	-	6.9	6.7
Critical Hdwy Stg 1		-	-	-	5.9	-
Critical Hdwy Stg 2		-	-	-	5.9	-
Follow-up Hdwy 2		-	-	-	3.95	3.75
Pot Cap-1 Maneuv	<b>d</b> 1360	-	-	-	518	743
Stage 1	-	-	-	-	740	-
Stage 2	-	-	-	-	718	-
Platoon blocked, %	)	-	-	-		
Mov Cap-1 Maneuv	<b>∕1£3</b> 60	-	-	-	516	743
Mov Cap-2 Maneuv		-	-	-	516	-
Stage 1	-	-	-	-	737	-
Stage 2	-	_	_	_	718	_
.9						
Δ			\A/D		0.0	
Approach	EB		WB		SB	
HCM Control Delay	/, <b>\$</b> 0.2		0		11.9	
HCM LOS					В	
Minor Lane/Major N	<b>V</b> lvmt	EBL	EBT	WBT '	WBRS	BLn1
Capacity (veh/h)		1360			-	548
HCM Lane V/C Rat		0.004		_		0.052
						11.9
	/(e)	77				
HCM Control Delay	/ (s)	7.7 Δ	-	-		
		7.7 A 0	-	-		B 0.2

Future AM 1: Hwy 50 & ACA Access

1.1					
	EPT	W/PT	\//PD	SPI	SBD
					אמט
					5
					5
					0
					None
	•				-
					_
лау <del>с,-н</del> -					-
					92
					50
					5
3	109	113	23	21	3
//ajor1	M	lajor2	M	linor2	
II 138	0	-	0	234	115
-	-	-	-	115	-
-	-	-	-	119	-
4.12	-	-	_	6.9	6.7
	-	-	-	5.9	-
	_	_	_	5.9	-
	-	-	-		3.75
	_	_	_		822
-	-	-	-	803	-
_	_	_	_		-
%	_	-	-	330	
	_			658	822
	-	-	-		-
	_		_		_
-	_	_	_		_
-	-	-	-	300	-
EB		WB		SB	
ıy, <b>s</b> 0.4		0		10.4	
				В	
N /ls 1	EDI	СРТ	W/DT	\^/DC	DI 4
ivivmt		ERI	MRI		
	1446	-	-		687
					0.038
	0.004	-	-		
atio ( ıy (s)	0.004 7.5	-	-	-	10.4
	0.004	- - -			
	EBL ns 5 5 #/hr 0 Free - 550 prage, # 92 6 2 5  Major1 II 138 - 4.12 1 - 2 - 2.218 vdr446 % uvbr446 uver	EBL EBT  ns	EBL EBT WBT  1	EBL EBT WBT WBR  The state of t	EBL EBT WBT WBR SBL  ns

Future PM 1: Hwy 50 & ACA Access

Intersection						
Int Delay, s/veh	0.9					
					05:	^==
	EBL		WBT '			SBR
Lane Configurations	7	<b>↑</b>	<b>↑</b>	7	Y	
Traffic Vol, veh/h	5	140	155	19	19	5
Future Vol, veh/h	5	140	155	19	19	5
Conflicting Peds, #/h	nr 0	0	0	0	0	0
				Free		
RT Channelized		Stop		None		None
	550	-	_	500	0	-
Veh in Median Stora			0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	50	50
Mvmt Flow	5	152	168	21	21	5
Major/Minor Na	ior1	N 4	oioro	N /	inara	
	jor1		lajor2		inor2	455
Conflicting Flow All	189	0	-	0	330	168
Stage 1	-	-	-	-	168	-
Stage 2	-	-	-	-	162	-
Critical Hdwy 4	4.12	-	-	-	6.9	6.7
Critical Hdwy Stg 1	-	-	-	-	5.9	-
Critical Hdwy Stg 2	-	-	_	-	5.9	-
Follow-up Hdwy 2.	218	-	_	-	3.95	3.75
Pot Cap-1 Maneuve		-	_	-	577	765
Stage 1	_	_	_	_	758	-
Stage 2	_			_	763	_
	-	-	-		103	-
Platoon blocked, %	-00 F	-	-	-	EZE	765
Mov Cap-1 Maneuvi		-	-	-	575	765
Mov Cap-2 Maneuve	er -		_		575	-
Stage 1	-	-	-	-	755	-
Stage 2	-	-	-	-	763	-
Approach	ED		WD		CD	
Approach	EB		WB		SB	
HCM Control Delay,	\$9.3		0		11.2	
HCM LOS					В	
Minor Lors/Mais NA	. m. t	EDI	ГРТ	MET	V/DD	DI <sub>E</sub> 4
Minor Lane/Major M		EBL	EDI	WBT		
Capacity (veh/h)		1385	-	-		606
HCM Lane V/C Ration		0.004				0.043
HCM Control Delay	(s)	7.6	-	-	-	11.2
HCM Lane LOS		Α	-	-	-	В
HCM 95th %tile Q(v	eh)	0	_	-	-	
	,					

Intersection						
Int Delay, s/veh	0.6					
Movement	EBL	EPT	\\/PT	WBR	SBL	SPD
Lane Configuration			VV D I	VVDR	SDL	SDK
Traffic Vol, veh/h	1S 7 5	<b>↑</b> 258	<b>T</b> 254	21	<b>19</b>	5
Future Vol, veh/h	5	258	254	21	19	5
Conflicting Peds, #		0	0	0	0	0
Sign Control				Free		
RT Channelized		Stop		None		None
Storage Length	550	-	-		0	-
Veh in Median Sto			0	-	0	_
Grade, %	- -	0	0	-	0	_
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %		2	2	2	50	50
Mvmt Flow	5	280	276	23	21	5
Willer low		200				
	1ajor1		lajor2		linor2	
Conflicting Flow Al	1 299	0	-	0	566	276
Stage 1	-	-	-	-	276	-
Stage 2	-	-	-	-	290	-
Critical Hdwy	4.12	-	-	-	6.9	6.7
Critical Hdwy Stg 1		-	-	-	5.9	-
Critical Hdwy Stg 2		-	-	-	5.9	-
Follow-up Hdwy		-	-	-	3.95	3.75
Pot Cap-1 Maneuv	/di262	-	-	-	413	661
Stage 1	-	-	-	-	672	-
Stage 2	-	-	-	-	662	-
Platoon blocked, %		-	-	-		
Mov Cap-1 Maneu		-	-	-	411	661
Mov Cap-2 Maneu		-	-	-	411	-
Stage 1	-	-	-	-	669	-
Stage 2	-	-	-	-	662	-
Approach	EB		WB		SB	
HCM Control Dela			0		13.6	
HCM LOS	,, J				В	
N 4' 1 (5 4 -				14/57	4/5	D
Minor Lane/Major			FRI	WBT		
Capacity (veh/h)		1262	-	-		446
HCM Lane V/C Ra		0.004	-	-		0.058
	/ \					13.6
<b>HCM Control Dela</b>	y (s)	7.9	-	-		
		7.9 A 0	-	-	-	B 0.2

Intersection					
Int Delay, s/veh 0.7					
Movement EBL	FRT	WRT	WBR	SBI	SBR
Lane Configurations		VV D I	VV DIC	₩ W	ODIX
Traffic Vol, veh/h		229	19	21	5
Future Vol, veh/h		229	19	21	5
Conflicting Peds, #/hr 0		0	0	0	0
	Free				
	Stop		None		None
Storage Length 550				0	-
Veh in Median Storage,		0	-	0	_
Grade, %	_	0	_	0	_
Peak Hour Factor 92		92	92	92	92
Heavy Vehicles, % 2		2	2	50	50
Mvmt Flow 5		249	21	23	5
			'		
N.A /N.A					
Major/Minor Major1		lajor2		linor2	0:-
Conflicting Flow All 270		-	0	530	249
Stage 1 -		-	-	249	-
Stage 2		-	-	281	-
Critical Hdwy 4.12		-	-	6.9	6.7
Critical Hdwy Stg 1 -		-	-	5.9	-
Critical Hdwy Stg 2		-	-	5.9	-
Follow-up Hdwy 2.218		-	-	3.95	3.75
Pot Cap-1 Maneuver293	-	-	-	435	686
Stage 1 -	-	-	-	693	-
Stage 2 -	-	-	-	668	-
Platoon blocked, %	-	-	-	400	000
Mov Cap-1 Maneuvle293		-	-	433	686
Mov Cap-2 Maneuver -		-	-	433	-
Stage 1 -	-	-	-	690	-
Stage 2 -	-	-		668	-
Approach EB		WB		SB	
HCM Control Delay, \$0.2		0		13.2	
HCM LOS				В	
Minor Lang/Major Mymt	EDI	EDT	WBT '	W/DEC	DI n1
Minor Lane/Major Mvmt			וטא		
Capacity (veh/h)	1293	-	-		466
HCM Central Delay (a)	0.004	-	-		0.061
HCM Control Delay (s) HCM Lane LOS	7.8	-	-		13.2 B
HCM 95th %tile Q(veh)	A 0	-	-	-	0.2
HOW SOUT MILE Q(VEII)	U	-	-	-	0.2

#### STATE OF COLORADO

#### DEPARTMENT OF TRANSPORTATION

Region 5, Traffic and Safety Unit 3803 N. Main Avenue, Suite 100 Durango, CO 81301 (970) 385-8360 (970) 385-8361 Fax



### LATE FALL, WINTER AND SPRING SPECIAL PROVISIONS FOR ACCESS CONSTRUCTION AND UTILITY INSTALLATIONS

It's that time of year again when work within the Right of Way (ROW) becomes a special concern. Due to Southwest Colorado's unpredictable weather, utility work in the ROW can create several types of hazards for the traveling public, contractors and their personnel. The condition of the highway can change quickly. Mud tracked onto the highway by equipment, or ice and snowpack are just a few of the conditions that make the roadway more hazardous for all concerned. The terrain within the ROW must be kept clear of hazards as well. Holes, trenches, equipment and materials can make the terrain "unrecoverable" for a driver should his/her vehicle leave the highway. Activities must be shut down when the roadway is other than dry. The use of frozen materials for backfilling will only lead to settlement. The contractor must make extra effort to compact the excavation. In the spring, any settlement of backfill shall be repaired. The re-vegetation shall take place yet this fall or early next spring.



#### DocuSign Envelope ID: 50C3C7E0-46A2-4191-9BE7-185F311AC58B

#### Clearances Information Summary

PURPOSE - This summary is intended to inform entities external to CDOT that may be entering the state highway right-of-way to perform work related to their own facilities (such as Utility, Special Use or Access Permittees), about some of the more commonly encountered environmental permits/clearances that may apply to their activities. This listing is not all-inclusive - additional environmental or cultural resource permits/clearances may be required in certain instances. Appropriate local, state and federal agencies should be contacted for additional information if there is any uncertainty about what permits/clearances are required for a specific activity. IMPORTANT – Please Review The Following Information Carefully – Failure to Comply With Regulatory Requirements May Result In Suspension or Revocation of Your CDOT Permit, Or Enforcement Actions By Other Agencies.

**CLEARANCE CONTACTS** - As indicated in the permit/clearance descriptions listed below, the following individuals or agencies may be contacted for additional information:

- Colorado Department of Public Health and Environment (CDPHE): General Information (303) 692-2035
   Water Quality Control Division (WQCD): (303) 692-3500
   Environmental Permitting Website <a href="https://www.colorado.gov/pacific/cdphe/all-permits">https://www.colorado.gov/pacific/cdphe/all-permits</a>
- CDOT Water Quality Program Manager: (303) 757-9343 https://www.codot.gov/programs/environmental/water-quality
- CDOT Asbestos Project Manager: Phil Kangas, (303) 512-5519
- Colorado Office of Archaeology and Historic Preservation: (303) 866-5216
- U.S. Army Corps of Engineers, District Regulatory Offices: Omaha District (NE CO), Denver Office (303) 979-4120 http://www.nwo.usace.army.mil/Missions/RegulatoryProgram/Colorado.aspx

Sacramento Dist. (Western CO), Grand Junction Office (970) 243-1199

http://www.spk.usace.army.mil/Missions/Regulatory.aspx Albuquerque

District (SE CO), Pueblo Office (719)-543-9459

http://www.spa.usace.army.mil/Missions/RegulatoryProgramandPermits.aspx

CDOT Utilities, Special Use and Access Permitting: (303) 757-9654 https://www.codot.gov/business/permits

<u>Wildlife Resources</u> - Disturbance of wildlife shall be avoided to the maximum extent practicable. Entry into areas of known or suspected threatened or endangered species habitat will require special authorization from the CDOT permitting office. If any threatened or endangered species are encountered during the progress of the permitted work, work in the subject area shall be halted and the CDOT Regional Permitting Office and Region Planning and Environmental Manager shall be contacted immediately. Authorization must be provided by CDOT prior to the continuation of work. Information about threatened or endangered species may be obtained from the CDOT website, <a href="http://www.codot.gov/programs/environmental/wildlife/guidelines">http://www.codot.gov/programs/environmental/wildlife/guidelines</a>, or the Colorado Parks and Wildlife (CPW) website, <a href="http://www.cpw.state.co.us/learn/Pages/SOC-ThreatenedEndangeredList.aspx">http://www.cpw.state.co.us/learn/Pages/SOC-ThreatenedEndangeredList.aspx</a>. Additional guidance may be provided by the appropriate Region Planning and Environmental Manager (RPEM).

Cultural Resources - The applicant must request a file search of the permit area through the Colorado Office of Archaeology and Historic Preservation (OAHP), Denver, to ascertain if historic or archaeological resources have previously been identified (<a href="http://www.historycolorado.org/oahp/file-search">http://www.historycolorado.org/oahp/file-search</a>). Inventory of the permit area by a qualified cultural resources specialist may be necessary, per the recommendation of CDOT. If archaeological sites/artifacts or historic resources are known to exist prior to the initiation of the permitted work or are encountered as the project progresses, all work in the subject area shall be halted and the CDOT Regional Permitting Office and Region Planning and Environmental Manager shall be contacted immediately. Authorization must be provided by CDOT prior to the continuation of work. Additional guidance may be provided by the Regional Permitting Office and RPEM. Contact Information: Contact the OAHP for file searches at (303) 866-5216.

Paleontological Resources - The applicant must request a fossil locality file search through the University of Colorado Museum, Boulder (https://cumuseum.colorado.edu/research/paleontology/vertebrates/policies), and the Denver Museum of Nature and Science (http://www.dmns.org/science/collections/earth-science-collections/) to ascertain if paleontological resources have been previously identified in or near the permit area. Inventory of the permit area by a qualified paleontologist may be necessary, per the recommendation of CDOT. If fossils are encountered during the permitted work, all work in the subject area shall be halted and the CDOT Regional Permitting Office and Region Planning and Environmental Manager shall be contacted immediately. Authorization must be provided by CDOT prior to the continuation of work. Additional guidance may be provided by the Regional Permitting Office in the Permit Special Provisions. Contact Information: See the museum websites listed above for Paleontological Collections Manager contact information. Contact the CDOT Paleontologist for further information at <a href="mailto:nicole.peavey@state.co.us">nicole.peavey@state.co.us</a> or (303) 7579632. The CDOT Paleontologist will not conduct a comprehensive file search independently of the museums.

Hazardous Materials, Solid Waste - The Solid Wastes Disposal Sites and Facilities Act C.R.S. 30-20-100, et al, and Regulations Pertaining to Solid Waste Disposal Sites and Facilities (6 CCR 1007-2), prohibit solid waste disposal without an approved Certificate of Designation (a landfill permit). The Colorado Hazardous Waste Act C.R.S. 25-15-301 et al, and the Colorado Hazardous Waste Regulations (6 CCR 1007-3) prohibit the transfer, storage or disposal (TSD) of hazardous waste except at permitted TSD sites. There are no permitted landfills or TSD sites within the State Highway Right of Way. Therefore, all solid or hazardous wastes that might be generated by the activities of entities entering the State Highway Right of Way must be removed from the ROW and disposed of at a permitted facility or designated collection point (e.g., for solid waste, a utility or construction company's own dumpster). If pre-existing solid waste or hazardous materials contamination (including oil or petroleum contaminated soil, asbestos, chemicals, mine tailings, etc.) is encountered during the performance of work, the permittee shall halt work in the affected area and immediately contact the CDOT Regional Permitting Office for direction as to how to proceed. *Contact Information:* Theresa Santangelo-Dreiling, CDOT Hazardous Materials Management Supervisor: (303) 512-5524.

Asbestos Containing Materials, Asbestos Contaminated Soil - All work on asbestos containing materials (ACM) must comply with the applicable requirements of the CDPHE Air Pollution Control Division's (APCD) Regulation 8. Disposal of ACM, and work done in asbestos-contaminated soil, must comply with the CDPHE Hazardous Materials and Waste Management Division's (HMWMD) Solid

Waste Regulations. The application for any CDOT permit must specifically identify any ACM involved in the work for which DocuSign Envelope ID: 50C3C7E0-46A2-4191-9BE7-185F311AC58B uirements may be specified in the permit special provisions. *Contact Info:* CDPHE APCD and HMWMD Regulations can be accessed via the CDPHE Environmental Permitting Website listed above.

*Info:* CDPHE APCD and HMWMD Regulations can be accessed via the CDPHE Environmental Permitting Website listed above. Additional information <u>concerning clearance on CDOT projects</u> is available from the CDOT Asbestos Project Manager (303) 5125519, or Theresa Santangelo-Dreiling, Hazardous Materials Management Supervisor: (303) 512-5524.

<u>Transportation of Hazardous Materials</u> - No person may offer or accept a hazardous material for transportation in commerce unless that person is registered in conformance with the United States Department of Transportation regulations at 49 CFR, Part 171. The hazardous material must be properly classed, described, packaged, marked, labeled, and in condition for shipment as required or authorized by applicable requirements, or an exemption, approval or registration has been issued. Vehicles requiring a placard, must obtain authorization and a State HAZMAT Permit from the Colorado Public Utilities Commission. *Contact Information:* For authorization and more info call the Federal Motor Safety Carrier Administration, US DOT for inter- and intra-state HAZMAT Registration (303) 969-6748. Colorado Public Utilities Commission: (303) 894-2868.

Discharge of Dredged or Fill Material – 404 Permits Administered By the U.S. Army Corps of Engineers, and Section 401 Water Quality Certifications Issued by the CDPHE WQCD - Corps of Engineers 404 permits are required for the discharge of dredged or fill materials into waters of the United States, including wetlands. There are various types of 404 permits, including nationwide permits, which are issued for activities with relatively minor impacts. For example, there is a nationwide permit for utility line activities (nwp #12). Depending upon the specific circumstances, it is possible that either a "general" or "individual" 404 permit would be required. If an individual 404 permit is required, section 401 water quality certification from the CDPHE WQCD is also required. Contact the appropriate Corps District Regulatory Office for information about what type of 404 permit may be required (contact information above). Contact the CDPHE Water Quality Control Division at (303) 692-3500.

Working on or in any stream or its bank - In order to protect and preserve the state's fish and wildlife resources from actions that may obstruct, diminish, destroy, change, modify, or vary a natural existing stream or its banks or tributaries, it may be necessary to obtain a Senate Bill 40 certification from the Colorado Department of Natural Resources. A stream is defined as 1) represented by a solid blue line on USGS 7.5' quadrangle maps; and/or 2) intermittent streams providing live water beneficial to fish and wildlife; and/or 3) segments of streams supporting 25% or more cover within 100 yards upstream or downstream of the project; and/or 4) segments of streams having wetlands present within 200 yards upstream or downstream of the project measured by valley length. The CPW application, as per guidelines agreed upon by CDOT and CPW, can be accessed at <a href="https://www.codot.gov/programs/environmental/wildlife/guidelines">https://www.codot.gov/programs/environmental/wildlife/guidelines</a>.

Stormwater Construction Permit (SCP) and Stormwater Discharge From Industrial Facilities - Discharges of stormwater runoff from construction sites disturbing one acre or more - or certain types of industrial facilities, such as concrete batch plants - require a CDPS Stormwater Permit. Contact Information: Contact the CDPHE Water Quality Control Division at (303) 692-3500. Website: <a href="https://www.colorado.gov/pacific/cdphe/wq-construction-general-permits">https://www.colorado.gov/pacific/cdphe/wq-construction-general-permits</a> and <a href="https://colorado.gov/pacific/cdphe/wq-commerce-andindustry-permits">https://colorado.gov/pacific/cdphe/wq-commerce-andindustry-permits</a>.

Construction Dewatering (Discharge or Infiltration) and Remediation Activities - Discharges of water encountered during excavation or work in wet areas may require a Construction Dewatering or Remediation Activities Discharge Permit. Contact Information: For Construction Dewatering and Remediation Activities Discharge Permits, contact the CDPHE WQCD at (303) 6923500. For Applications and Instructions (CDPHE website): https://www.colorado.gov/pacific/cdphe/wq-construction-general-permits.

Municipal Separate Storm Sewer System (MS4) Discharge Permit - Discharges from the storm sewer systems of larger municipalities, and from the CDOT highway drainage system that lies within those municipalities, are subject to MS4 Permits issued by the CDPHE WQCD. For facilities that lie within the boundaries of a municipality that is subject to an MS4 permit, the owner of such facility should contact the municipality regarding stormwater related clearances that may have been established under that municipality's MS4 permit. All discharges to the CDOT highway drainage system or within the Right of Way (ROW) must comply with the applicable provisions of the Colorado Water Quality Control Act, the Water Quality Control Commission (WQCC) Regulations (https://www.colorado.gov/pacific/cdphe/wqcc-regulations-and-policies-and-water-quality-statutes) and the CDOT MS4 Permit # COS000005 (https://www.codot.gov/programs/environmental/water-quality/documents). Discharges are subject to inspection by CDOT and CDPHE. Contact the CDPHE Water Quality Control Division at (303) 692-3500 for a listing of municipalities required to obtain MS4 Permits, or go to https://www.colorado.gov/pacific/cdphe/wq-municipal-ms4-permits. For CDOT-related MS4 regulations, go to: https://www.codot.gov/programs/environmental/water-quality/stormwater-programs.html.

<u>General Prohibition – Discharges</u> - All discharges are subject to the provisions of the Colorado Water Quality Control Act and the Colorado Discharge Permit Regulations. Prohibited discharges include, but are not limited to, substances such as wash water, paint, automotive fluids, solvents, oils or soaps and sediment. *Contact Information:* Contact the CDPHE Water Quality Control Division at (303) 692-3500.

General Authorization - Allowable Non-Stormwater Discharges - Unless otherwise identified by CDOT or the WQCD as significant sources of pollutants to the waters of the State, the following discharges to stormwater systems are allowed without a Colorado Discharge Permit System permit: landscape irrigation, diverted stream flows, uncontaminated ground water infiltration to separate storm sewers, discharges from potable water sources, foundation drains, air conditioning condensation, irrigation water, uncontaminated springs, footing drains, water line flushing, flows from riparian habitats and wetlands, and flow from firefighting activities. Allowable non-stormwater discharges can be found under Illicit Discharge PDD at: <a href="https://www.codot.gov/programs/environmental/water-quality/stormwater-programs.html">https://www.codot.gov/programs/environmental/water-quality/stormwater-programs.html</a>. Contact Information: The CDPHE Water Quality Control Division (telephone #'s listed above).

<u>Erosion and Sediment Control Practices</u> - For activities requiring a Stormwater Construction Permit, erosion control requirements will be specified in that permit. In situations where a stormwater permit is not required, all reasonable measures should be taken to minimize erosion and sedimentation according to CDOT Standard Specifications 107.25, 208, 213 and 216 (<a href="https://www.codot.gov/business/designsupport/2011-construction-specifications/2011-Specs/2011-specs-book">https://www.codot.gov/business/designsupport/2011-construction-specifications/2011-Specs/2011-specs-book</a>). All disturbances require a stabilization plan, native seeding or landscape design plan according to applicable CDOT Standard Specifications 212-217 and 623. The CDOT Erosion Control and Stormwater Quality Guide (available from the Bid Plans Office at (303) 757-9313) should be used to design erosion controls and restore disturbed vegetation.

Disposal of Drilling Fluids - Drilling fluids used in operations such as Horizontal Directional Drilling may be classified as "discharges" DocuSign Envelope ID: 50C3C7E0-46A2-4191-9BE7-185F311AC58B med from the construction area, removed from the State Highway Right of Way, and disposed of at permitted facilities that specifically accept such wastes. Disposal of drilling fluids into storm drains, storm sewers, roadside ditches or any other type of man-made or natural waterway is prohibited by Water Quality Control and/or Solid Waste regulations. Small quantities of drilling fluid solids (less than 1 cubic yard of solids) may be left on-site after either being separated from fluids or after infiltration of the water, provided: 1) the drilling fluid consists of only water and bentonite clay, or, if required for proper drilling properties, small quantities of polymer additives that are approved for use in drinking water well drilling; 2) the solids are fully contained in a pit, and are not likely to pose a nuisance to future work in the area, 3) the solids are covered and the area restored as required by CDOT permit requirements (Utility, Special Use, or Access Permits, etc.). *Contact Information:* Contact CDPHE

Noxious Weeds and Invasive Species Management Plan — Noxious Weeds and Invasive Species guidance can be found by contacting the Colorado Department of Agriculture (<a href="https://www.colorado.gov/pacific/agconservation/noxiousweeds">https://www.colorado.gov/pacific/agconservation/noxiousweeds</a>) and the Colorado Division of Parks and Wildlife (<a href="https://cpw.state.co.us/aboutus/Pages/RS-NoxiousWeeds.aspx">https://cpw.state.co.us/aboutus/Pages/RS-NoxiousWeeds.aspx</a>). In either case, management plans involving the control of noxious weeds associated with the permitted activity and cleaning of equipment will be required.

<u>Concrete Washout</u> - Waste generated from concrete activities shall NOT be allowed to flow into the drainage ways, inlets, receiving waters, or in the CDOT ROW. Concrete waste shall be placed in a temporary concrete washout facility and must be located a minimum of 50 feet from state waters, drainageways, and inlets. Concrete washout shall only be performed as specified by the CDOT Environmental Program and shall be in accordance to CDOT specifications and guidelines. *Contact Information:* Contact CDPHE or find additional information on the CDOT website: <a href="https://www.codot.gov/business/designsupport/2011-constructionspecifications/2011-specs">https://www.codot.gov/business/designsupport/2011-constructionspecifications/2011-specs</a> and refer to the specifications and their revisions for sections 101, 107 and 208.

Spill Reporting - Spills shall be contained and cleaned up as soon as possible. Spills shall NOT be washed down into the storm drain or buried. All spills shall be reported to the CDOT Illicit Discharge Hotline at (303) 512-4446 (4H20), as well as the Regional Permitting Office and Regional Maintenance Supervisor. Spills on highways, into waterways, any spill in the highway right-of-way exceeding 25 gallons, or that may otherwise present an immediate danger to the public shall be reported by calling 911, and shall also be reported to the CDPHE at 1-877-518-5608. More information can be found at <a href="https://www.colorado.gov/pacific/cdphe/emergencyreporting-line">https://www.colorado.gov/pacific/cdphe/emergencyreporting-line</a>.

<u>About This Form</u> - Questions or comments about this Information Summary may be directed to Dan Roussin, Program Administrator, CDOT Access Management Unit, at (303) 757-9841, daniel.roussin@state.co.us

**Environmental Clearances Information Summary** 

(telephone #'s listed above).

Page 3 of 3

Colorado Department of Transportation

April 2020



## What is stormwater runoff?

Stormwater runoff occurs when precipitation from rain or snowmelt flows over the ground. Impervious surfaces like roads and sidewalks prevent stormwater from naturally soaking into the ground

# Why is stormwater runoff a problem?

pollutants and flow into CDOT's storm drain system or directly enters CDOT's storm drain system is discharged untreated into into a stream, river, lake, wetland or reservoir. Anything that the waterways we use for fishing, swimming, and providing Stormwater can pick up debris, chemicals, dirt and other drinking water.



material, radioactive material, heat, pH, wrecked or Dredged spoil,, dirt,, slurry,, solid waste, incinerator discarded equipment, rock, sand, any industrial, residue, sewage, sewage sludge, garbage, trash chemical waste, biological nutrient, biological municipal, or agricultural waste

# Tips for Reporting an Illicit Discharge

From a safe distance try to estimate the amount of Call the illicit discharge hotline at (303) 512-4426 the discharge.

Identify characteristics of the discharge (color, odor, algae, etc.).

Obtain information on the vehicle dumping the waste (if applicable).

Do not approach!

If possible, take a photo, record a license plate. Call \*CSP for illicit dumping.

Never get too close to the illicit discharge, it may

REMEMBER:

be dangerous!!!

For more information on CDOT Utility Permits: https://www.codot.gov/business/permits/utilitie sspecialuse

For more information on CDOT Access Permits: https://www.codot.gov/business/permits/access permits

Water Quality Program Manager Program:

For more information on CDOT Water Quality


Denver, Colorado 80222 4201 E. Arkansas Ave. Shumate Building 303-757-9343



## Water Quality Program Industrial Facilities

## Drogram

stormwater can be discharged from CDOT's storm drain system otherwise known as (MS4) from the Colorado Department of CDOT has a Municipal Separate Storm Sewer System permit, Public Health and Environment. The permit states that only



programs to prevent pollutants from entering into As part of the permit, CDOT has several different the storm drain system:

- Construction Site Program
- New Development Redevelopment Program
  - Illicit Discharge Program
- Industrial Facilities Program
- Public Education and Outreach Program
- Pollution Prevention and Good Housekeeping
- Wet Weather Monitoring Program




## **Control Measures**

## for Industrial

#### **Facilities**

operating the facility. Control measures are schedules (BMP) during the construction of a facility and when Control Measures also include treatment, operating pollution entering into CDOT's storm drain system. Industrial facilities can use control measures (CM) otherwise known as Best Management Practices of activities, maintenance procedures, and other procedures, and practices to control site run off which can include structural and non-structural management practices to prevent and reduce

## THE GAUNTLE



ine, facility, or system producing, transmitting CDOT defines a utility, or utility facility as any privately, publicly, or cooperatively owned or distributing the following:

- Communications
- Cable television
- ✓ Power
- ✓ Electricity
- ✓ Light
- ✓ Heat Gas

- io >
- **Crude Products** 
  - ✓ Water

- Stream
- Waste
- Stormwater not connected with highway drainage Similar Commodity







# Industrial Facilities Program Elements:

- or operators that have potential to contribute substantial pollutant to Educate and outreach to owners
- Report and include information on notification within 15 days of discharge and water quality concerns. Provide written discovery to CDPHE.
- distributed; name and title of each Submit an annual report to CDPHE containing the number of informational brochures individual trained. ო

### Education

company or other entity doing work in the http://www.coloradodot.info/programs/ standards/Environmental%20Clearances% clearances. This fact sheet is given to each Information Summary for those applying for a CDOT Utility and Special Use Permit state highway right-of-way will require together an Environmental Clearances or Access Permit to obtain all required some type of environmental permit or clearance for that work. CDOT has put environmental/resources/guidance-There are instances when a utility permittee and is available at: 20Info%20Summary.pdf

#### COLORADO DEPARTMENT OF TRANSPORTATION STATE HIGHWAY ACCESS PERMIT APPLICATION

Issuing authority application acceptance date:

Please print or type  - Contact the issuing auti - Complete this form (sor - Submit an application for - If you have any question	or each access affected. ns contact the issuing authorit	and other documents are n you) and attach all necess y.	equired to be submitte sary documents and S	ur issuing authority. ed with your application. Submit it to the issuing authority. ness/permits/accesspermits
Property owner (Permittee)     FRANK HOLMAN		2) Applicant or Agent for ACA PRODUCTS	r permittee (if differe	
Street address 14100 COUNTY ROAD 140		Mailing address PO BOX 1887	,	
City, state & zip Phot SALIDA, CO 81201 (7	ne# 19) 239-1894	City, state & zip BUENA VISTA,		Phone # (required) (719) 395-3790
E-mail address FHOLMAN51@OUTLOOK.COM		E-mail address if available BBENNETTS@ACA		
<ol> <li>Address of property to be served by permit (requive)</li> </ol>	ired)			
Legal description of property: If within jurisdiction     subdivision	nal limits of Municipality, city a	nd/or County, which one?	hav-rahi-	
CHAFFEE		35 & 36	township 50N	7 E. NEW MEX
5) What State Highway are you requesting access HIGHWAY 50		6) What side of the highw	5	V
7) How many feet is the proposed access from the r	earest mile post? How many	feet is the proposed acces	ss from the nearest cr	oss street?
2006 feet ☐ N ☐ S ☐ E ■ W) from:	MMP 213 2112	feet 🔲N 🔲S 🗐 🛭	W) from: COUNT	FY ROAD 219
<ol> <li>What is the approximate date you intend to begin 4/1/2020</li> </ol>	construction?			
9) Check here if you are requesting a:				
new accesstemporary access (duration change in access use	on anticipated: removal of access		vement to existing ac ation of an existing ac	
10) Provide existing property use  AGRICULTURAL				
11) Do you have knowledge of any State Highway a yes, if yes - what are the per	ccess permits serving this pro rmit number(s) and provide co	perty, or adjacent propertie pies:		n property interest? r, permit date:
12) Does the property owner own or have any intere	<b>9:</b>			
13) Are there other existing or dedicated public stree  no  yes, if yes - list them on you	ets, roads, highways or access r plans and indicate the propo	easements bordering or w sed and existing access p	ithin the property? pints.	
<ol> <li>If you are requesting agricultural field access - h</li> </ol>	ow many acres will the access	serve?		
<ol> <li>If you are requesting commercial or industrial ac business/land use</li> </ol>	cess please indicate the types square footage	and number of businesses	and provide the floor	area square footage of each. square footage
SAND & GRAVEL PIT				
16) If you are requesting residential developement a type	ccess, what is the type (single number of units		use) and number of u	
N/A	Trumber of drifts	type		number of units
17) Provide the following vehicle count estimates for	vehicles that will use the acce	ess. Leaving the property the	nen returning is two co	ounts.
ndicate if your counts are peak hour volumes or average daily volumes.	# of passenger cars and light trucks	at peak hour volumes	# of multi unit trucks at po	eak hour volumes
of single unit vehicles in excess of 30 ft.	# of farm vehicles (field equipment)		Total count of all ve	phiclas
40	0		268	Pilloles

18) י	Check with the issuing authority to determine which of the followin	g documents are required to complete the review of your application.
.0,	check with the issuing authority to determine which of the following	g documents are required to complete the review of your application

- a) Property map indicating other access, bordering roads and streets.
- b) Highway and driveway plan profile.
- c) Drainage plan showing impact to the highway right-of-way.
- d) Map and letters detailing utility locations before and after development in and along the right-of-way.
- e) Subdivision, zoning, or development plan.
- f) Proposed access design.
- g) Parcel and ownership maps including easements.
- h) Traffic studies.
- i) Proof of ownership.

1- It is the applicant's responsibility to contact appropriate agencies and obtain all environmental clearances that apply to their activities. Such clearances may include Corps of Engineers 404 Permits or Colorado Discharge Permit System permits, or ecological, archeological, historical or cultural resource clearances. The CDOT Environmental Clearances Information Summary presents contact information for agencies administering certain clearances, information about prohibited discharges, and may be obtained from Regional CDOT Utility/Special Use Permit offices or accessed via the CDOT Planning/Construction-Environmental-Guidance webpage: <a href="https://www.codot.gov/programs/environmental/resources/guidance-standards/environmental-clearances-info-summary-august-2017/view">https://www.codot.gov/programs/environmental/resources/guidance-standards/environmental-clearances-info-summary-august-2017/view</a>

2- All workers within the State Highway right of way shall comply with their employer's safety and health policies/procedures, and all applicable U.S. Occupational Safety and Health Administration (OSHA) regulations - including, but not limited to the applicable sections of 29 CFR Part 1910 - Occupational Safety and Health Standards and 29 CFR Part 1926 - Safety and Health Regulations for Construction.

Personal protective equipment (e.g. head protection, footwear, high visibility apparel, safety glasses, hearing protection, respirators, gloves, etc.) shall be worn as appropriate for the work being performed, and as specified in regulation. At a minimum, all workers in the State Highway right of way, except when in their vehicles, shall wear the following personal protective equipment: High visibility apparel as specified in the Traffic Control provisions of the documentation accompanying the Notice to Proceed related to this permit (at a minimum, ANSI/ISEA 107-1999, class 2); head protection that complies with the ANSI Z89.1-1997 standard; and at all construction sites or whenever there is danger of injury to feet, workers shall comply with OSHA's PPE requirements for foot protection per 29 CFR 1910.136, 1926.95, and 1926.96. If required, such footwear shall meet the requirements of ANSI Z41-1999.

Where any of the above-referenced ANSI standards have been revised, the most recent version of the standard shall apply.

3- The Permittee is responsible for complying with the Revised Guidelines that have been adopted by the Access Board under the American Disabilities Act (ADA). These guidelines define traversable slope requirements and prescribe the use of a defined pattern of truncated domes as detectable warnings at street crossings. The new Standards Plans and can be found on the Design and Construction Project Support web page at:

https://www.codot.gov/business/civilrights/ada/resources-engineers

If an access permit is issued to you, it will state the terms and conditions for its use. Any changes in the use of the permitted access not consistent with the terms and conditions listed on the permit may be considered a violation of the permit.

The applicant declares under penalty of perjury in the second degree, and any other applicable state or federal laws, that all information provided on this form and submitted attachments are to the best of their knowledge true and complete.

I understand receipt of an access permit does not constitute permission to start access construction work.

Applicant or Agent for Permittee signature	Print name	Date							
Elphe Bant	BLAKE BENNETTS	2/10/20							
If the applicant is not the owner of the property, we require this application also to be signed by the property owner or their legally authorized representative (or other acceptable written evidence). This signature shall constitute agreement with this application by all owners-of-interest unless stated in writing. If a permit is issued, the property owner, in most cases, will be listed as the permittee.									
Property owner signature	Print name	Date							
hay Male	FRANK HOLMAN	2/10/20							
		- h							



Traffic & Safety 3803 N. Main Avenue, Suite 100 Durango, CO 81301

October 13, 2021

ACA Products, Inc. Blake Bennetts PO Box 1887 Buena Vista, CO 81211

Re: Extension of Access Permit No. 520022, US 50, MP 212.62 L in Chaffee County

Dear Mr. Bennetts:

We received on October 7, 2021 your request for a one-year extension of time to construct the above-referenced access permit.

Pursuant to the 1998 State Highway Access Code, Section 2.11(d), please consider this letter as authorization for a one-year extension for Access Permit No. **520022** per the request. This authorization will **expire on June 2**, **2022**. If you do not proceed with construction prior to the above expiration date, **the permit will become null and void**.

The above-referenced permit includes the following requirements:

The access shall be constructed in accordance with a set of approved design plans, which must be furnished to CDOT well in advance of construction. When the final design plans, including, but not limited to material specifications, Certifications of Compliance, and a construction schedule, are accepted and approved, a pre-construction conference must be scheduled with this office well in advance of construction. After the pre-construction meeting issues have been resolved, CDOT will issue a **Notice To Proceed** that will allow construction to begin.

This authorization is hereby considered an attachment to the permit referenced above. **All terms and conditions of Permit No. 520022 remain valid.** Please have this authorization letter and your copies of the issued permit available for review at the construction site by CDOT personnel.

If you have any questions, please call me at (970) 385-3626.

Sincerely,

Randee Reider
Region 5 Access Manager
Cc: Access File
Chaffee County
Maintenance

