

**GOOSE HAVEN RESERVOIR
EXPANSION
GROUNDWATER MODELING
REPORT**

Prepared for:

Rock Products of Colorado LLC
PO Box 983
Broomfield, CO 80038

Prepared by:

Weiland, Inc.
PO Box 18087
Boulder, CO 80308

January 13, 2023

TABLE OF CONTENTS

	<u>Page</u>
1.0 INTRODUCTION.....	1
2.0 MODEL PURPOSE AND DESIGN	2
2.1. MODEL DISCRETIZATION AND METHODS.....	2
2.2. LOCAL GROUNDWATER AQUIFERS.....	2
2.3. PRE-MINING MODEL INPUT PARAMETERS	4
2.3.1. Hydraulic Conductivities.....	4
2.3.2. Boundary Conditions.....	4
2.3.3. Sinks and Sources	4
2.4. PRE-MINING MODFLOW SIMULATIONS AND CALIBRATION.....	5
2.5. RECLAMATION MODFLOW INPUT AND SIMULATIONS.....	5
2.5.1. Perimeter Drain Design and MODFLOW Parameters.....	5
2.6. Reclamation Model Output	6
3.0 DISCUSSION AND CONCLUSIONS.....	7

SHEETS

GW 1 MODFLOW OUTPUT PRE-MINING

GW 2 MODFLOW OUTPUT RECLAMATION

GW 3 MODFLOW OUTPUT PRE-MINING / RECLAMATION DELTA

APPENDICES

A DWR WELL LOGS

E MODFLOW Output Printout.

1.0 INTRODUCTION

The Goose Haven Reservoir Expansion project has the potential to impact groundwater elevations in the vicinity of the site due to the construction of low permeability compacted clay liners designed to store water rights for the City of Lafayette. This study utilizes a groundwater model as a predictive tool to determine potential impacts to groundwater levels as well as quantify the efficacy of existing and proposed subsurface drains. A previous groundwater modeling study was developed by CTL Thompson in 2010 (Groundwater Response Study Goose Haven Reservoir Complex Expansion Goose Haven Reservoir No.2 Lafayette, Colorado) however the files were not available from CTL.

The model has been developed through application of 3d surface modeling in Autodesk Civil 3d and the Modflow 2005 Graphical User Interface (GUI) software Aquaveo VMS 10.6.1. (VMS)

Although the model encompasses the entire site and beyond, the primary focus is on the addition of Cell 2A, which is the subject of the currently pending approval of the Amendment 2 of DRMS Permit #M2010-M071.

Standard engineering practices have been used in preparation of this study and all best available data sources have been utilized.

2.0 MODEL PURPOSE AND DESIGN

The objective of this model is to predict ground water levels and flow rates in the alluvium and water bearing surficial sediments around the Goose Haven reservoirs. Within that objective, the model is also used to predict increased water level elevations due to construction of compacted clay liners (liners). The model is then used to simulate drains just up-gradient of the liners and quantify drain flows necessary to mitigate groundwater mounding. Sizing of the drain and resulting capacity is then based on the cell by cell and cumulative flow terms of the drain simulation in the model and the layer zone budgets.

The model is used to simulate water table conditions before and after mining and reclamation operations. To accomplish this, a steady-state single layer model that is convertible from confined to unconfined conditions is used. The pre-mining condition is simulated and calibrated to observed water table elevations (heads). Calibration is achieved by varying hydraulic conductivity values and running the model in an iterative fashion until the solution converges close to the observed heads.

To simulate the effect of the perimeter drains, the MODFLOW drain package is used. The existing and proposed reservoirs are modeled as horizontal flow barriers with elevations of the reservoir stages and conductance equal to the compacted clay liner design criteria.

2.1. MODEL DISCRETIZATION AND METHODS

The finite difference grid measures 7000ft in the X direction and 4600ft in the Y direction. The grid is oriented North-South with no rotation. The Grid cell size is set to 50ft. The model consists of one hydro-stratigraphic unit with variable zones of hydraulic conductivity including silty sand, clayey silt and dirty slightly indurated gravel. Top and bottom elevations are based on test hole data and resultant TINs developed in Autodesk Civil 3d. The tins were developed based on onsite data from boring conducted by CTL Thompson (Geotechnical Investigation Goose Haven Reservoir Complex Expansion Goose Haven Reservoir No. 2, Lafayette CO, March 10, 2010) and well logs from the DWR Colorado Decision Support System (CDSS). Areal locations of the test holes and DWR wells are shown in GW-1. The TINs were sampled at node centers and exported to the VMS GUI which converts to formatted input for MODFLOW.

2.2. LOCAL GROUNDWATER AQUIFERS

The general physiographic setting can be described as the southern flank of the Boulder Creek Valley alluvial aquifer. Cells 2 and 2A occur at the southern

boundary of the alluvial aquifer. The underlying bedrock is the Fox Hills/ Laramie Formation composed of weathered claystone, indurated claystone interbedded with sandstone.

The Boulder creek valley alluvial aquifer is tributary to Boulder Creek and is composed of alluvial sand and gravel with an average thickness of 4-15ft. The water table varies seasonally with local irrigation contributing to enhanced recharge and higher water tables during the irrigation season. The gravel layer becomes thinner at the south margin of the valley and the southern boundary. The reservoir complex generally coincides with the southern Boundary of the Boulder Creek alluvial valley. The aquifer to the south of Cell 2A varies in thickness from 4ft to 10ft and is composed of aeolian silts and lacustrine clays. A thicker layer of water bearing sediment occurs in a paleochannel in what is known as the Bullhead Gulch drainage. This gulch trends north-north east and has a higher transmissivity up gradient of Cells 2 and 3.

2.3. PRE-MINING MODEL INPUT PARAMETERS

2.3.1. Hydraulic Conductivities

Hydraulic conductivity for the gravel aquifer was set to 50 ft/day. This value is lower than a typical value for sand and gravel due to the fact the gravel is somewhat indurated (cemented). This area of the alluvial aquifer appears to be an upper older terrace which would explain the degree of cementation. The area due south the Cell 2 A was assigned a hydraulic conductivity of 12 ft/day based on onsite well logs to the south as well as DWR well logs along Isabell Road to the south. The area of Bullhead Gulch was assigned a hydraulic conductivity of 10ft/day. East of Bullhead Gulch the value was set to 12 ft/day. The hydraulic conductivity zones as shown in GW-1.

2.3.2. Boundary Conditions

The model domain was created to be large enough so to allow for the use of constant head boundaries based on water table elevation data or interpolated data in the absence of data points. Regarding interpolated data, boundary head elevations were interpolated to follow the general principle of groundwater flow, which is that that surficial groundwater follows the contour of the land. As such if the general understanding of the area is that the water table occurs at about -6ft from the surface (based on DWR wells, see Appendix A) then the water table was set at approximately 6ft below the ground. Similar methods were used for depth to bedrock elevations near the model boundary. The existing Reservoirs (Cell 1 & Cell 3) were modeled as horizontal flow boundaries with elevations set at normal pool elevations and conductance set to .001 ft/day.

2.3.3. Sinks and Sources

Aside from the sinks and sources inherent to the constant head boundary conditions, sources for the pre-mining simulation include recharge from the irrigated land to the south. Recharge rates were determined using results from local consumptive use models used for similar crop types in support of engineering reports prepared by WI for district 6 water rights court cases. Flood irrigation is assumed to be 50% irrigation efficiency. Of the water not consumed by crops, 50% is surface runoff and 50% deep percolation. The calculated deep percolation is what was applied as recharge. Since a Transient Model was not used, the irrigation season recharge was distributed throughout the calendar year to yield a ft/day value of .003 ft/day. Fields to the south and east of Cell 2A utilize sprinkler irrigation which was assigned an irrigation efficiency of 90% with deep percolation values determined in a similar fashion as flood.

2.4. PRE-MINING MODFLOW SIMULATIONS AND CALIBRATION

The model was run in VMS utilizing only Horizontal Barrier and Recharge optional packages. The initial K values were varied to arrive at a calibrated solution that most closely matched the onsite baseline piezometer data from June 30, 2009 in the letter to Michael Cunningham dated March 31, 2011 from Aaron Asquith Re: Goose Haven Reservoir No. 2; DRMS File No. M-2010-071 Groundwater Monitoring and Mitigation Plan. It should be noted that in general the calibration was within +/- 1-2 feet which is within the seasonal variability of the water table. As a conservative approach, the error was chosen to be on the higher side. The reasoning being that mitigation of more water in the system when considering the reclamation condition would likewise be a conservative approach. MODFLOW output for the pre-mining condition has been plotted in Sheet GW-1.

2.5. RECLAMATION MODFLOW INPUT AND SIMULATIONS

The reclamation condition model took the calibrated pre-mining model and added horizontal flow barriers for Cells 2 and 2A. The MODFLOW drain package was added to simulate an as built perimeter drain south of Cell 2A and a previously engineered perimeter drain specified in the report prepared by CTL Thompson and titled Groundwater Response Study Goose Haven Reservoir Complex Expansion Goose Haven Reservoir No. 2 Lafayette, Colorado (9/8/2010).

2.5.1. Perimeter Drain Design and MODFLOW Parameters

The as-built perimeter drain design is given in the Exhibit G materials previously submitted to the DRMS. The 6" perforated PVC drain pipe is calculated to have a total flow capacity of 1 c.f.s. over the length of the drain. The unit inflow capacity of 0.06 c.f.s. per ft. The inflow capacity exceeds the hydraulic conductivity of the drain filter pack material and as such the drain conductance parameter is calculated as follows:

$$C=(K*L*W)/M$$

where:

K=Hydraulic Conductivity of drain filter [l/t]= 300ft/day

L=Length of boundary drain cell [l] = 50 ft *

W=width of drain boundary filter pack [l] = 3ft

M=thickness of drain boundary filter pack [l] = 1.5ft

*VMS computes the length of the Cell, therefore this term is omitted from the parameter

$$C = (200\text{ft/day} \times 3\text{ft}) / 1.5\text{ft} = 400\text{ft}^2/\text{day}$$

Drain conductance was set to $300\text{ft}^2/\text{day}$ as a conservative estimate. It should be noted drain flow was unaffected by conductance values greater than $150\text{ft}^2/\text{day}$, which indicates the aquifer hydraulic conductivity and head are the limiting parameters to drain flow.

2.6. Reclamation Model Output

The reclamation model output head elevations are plotted in GW-2 and GW-3. GW-2 shows the model output contours and GW-3 shows the delta between the Pre-mining condition and the reclamation condition. The model output sink zone budget for the drain as built upgradient of Cell 2A is 0.16 c.f.s. The sink zone budget for the CTL designed drain is .04 c.f.s.

3.0 DISCUSSION AND CONCLUSIONS

A groundwater model has been developed based on detailed onsite information and data gathered from DWR CDSS for bedrock elevations, surficial sediment type and groundwater elevations from older well logs. Data has been interpolated based on general principals of groundwater flow and trends in the local hydro stratigraphic geometries and water bearing stratigraphy. It is important to note that the majority of the water wells to the south of Cell 2A have been completed in non-tributary aquifers deep in the Laramie Fox-Hills bedrock aquifer (those wells were not used for water levels). The surficial aquifer south of the site which recharges the area occupied by the Goose Haven Reservoir Complex, is composed of fine grain sediment with low transmissivity with areas of bedrock near the surface.

For the area south of Cell 2A, the reclamation condition model included simulation of the drain, which was calibrated to approximate observed flow. The drain was observed to flow at approximately .25 c.f.s. during the peak of the 2022 irrigation season. The model predicted the drain to flow approximately 0.16 c.f.s. It should be noted that the gravity design flow for the drain pipe previously submitted to the DWR in Exhibit G, is 1 c.f.s.

The model output delta contours shown in GW-3 predicts some minor increase in water table elevations and minor depressions as well, however generally predicts a zero rise in offsite groundwater elevations. The variable behavior of the model in this area can be attributed to the variable nature of bedrock elevations and low transmissivity of the stratigraphy in this area.

To the East of the Reservoir complex, the model predicts a slight increase in water table elevations of ~ 0.5ft near the eastern boundary of the Windsor Grollman Residence and a lowering of water table elevations of up to ~ 2ft at the Schneider property. Since these properties do not have water wells, these predicted water levels are not expected to have any affect. Furthermore, the City has executed structure agreements with both of these land owners.

The model predicts a shadowing effect down gradient and north of the reservoir complex. Since the affected lands are permanently in a conservation easement and owned by Boulder County, lowering of the water table in that area will not affect the preservation of agricultural land use in that area. There are no wells on this property.

As an added measure of protection, the City will agree to construct 3 additional piezometers (P-11, P-12 & P-13) in the areas shown in GW-3 which will be monitored on the same schedule as the existing monitoring plan.

LEGEND

HYDRAULIC CONDUCTIVITY

K=12 FT/DAY

K=10 FT/DAY

K=50 FT/DAY

MODFLOW OUTPUT HEAD

MAJOR CONTOUR (10FT)

MODFLOW OUTPUT HEAD

MINOR CONTOUR (2FT)

SUBSURFACE TEST HOLE

TH-2F

DWR WELL LOG

5109.00



150456 WELL LOG BR. ELEV.

5061.90

EXISTING PIEZOMETERS

P-5

MODEL DOMAIN BOUNDARY

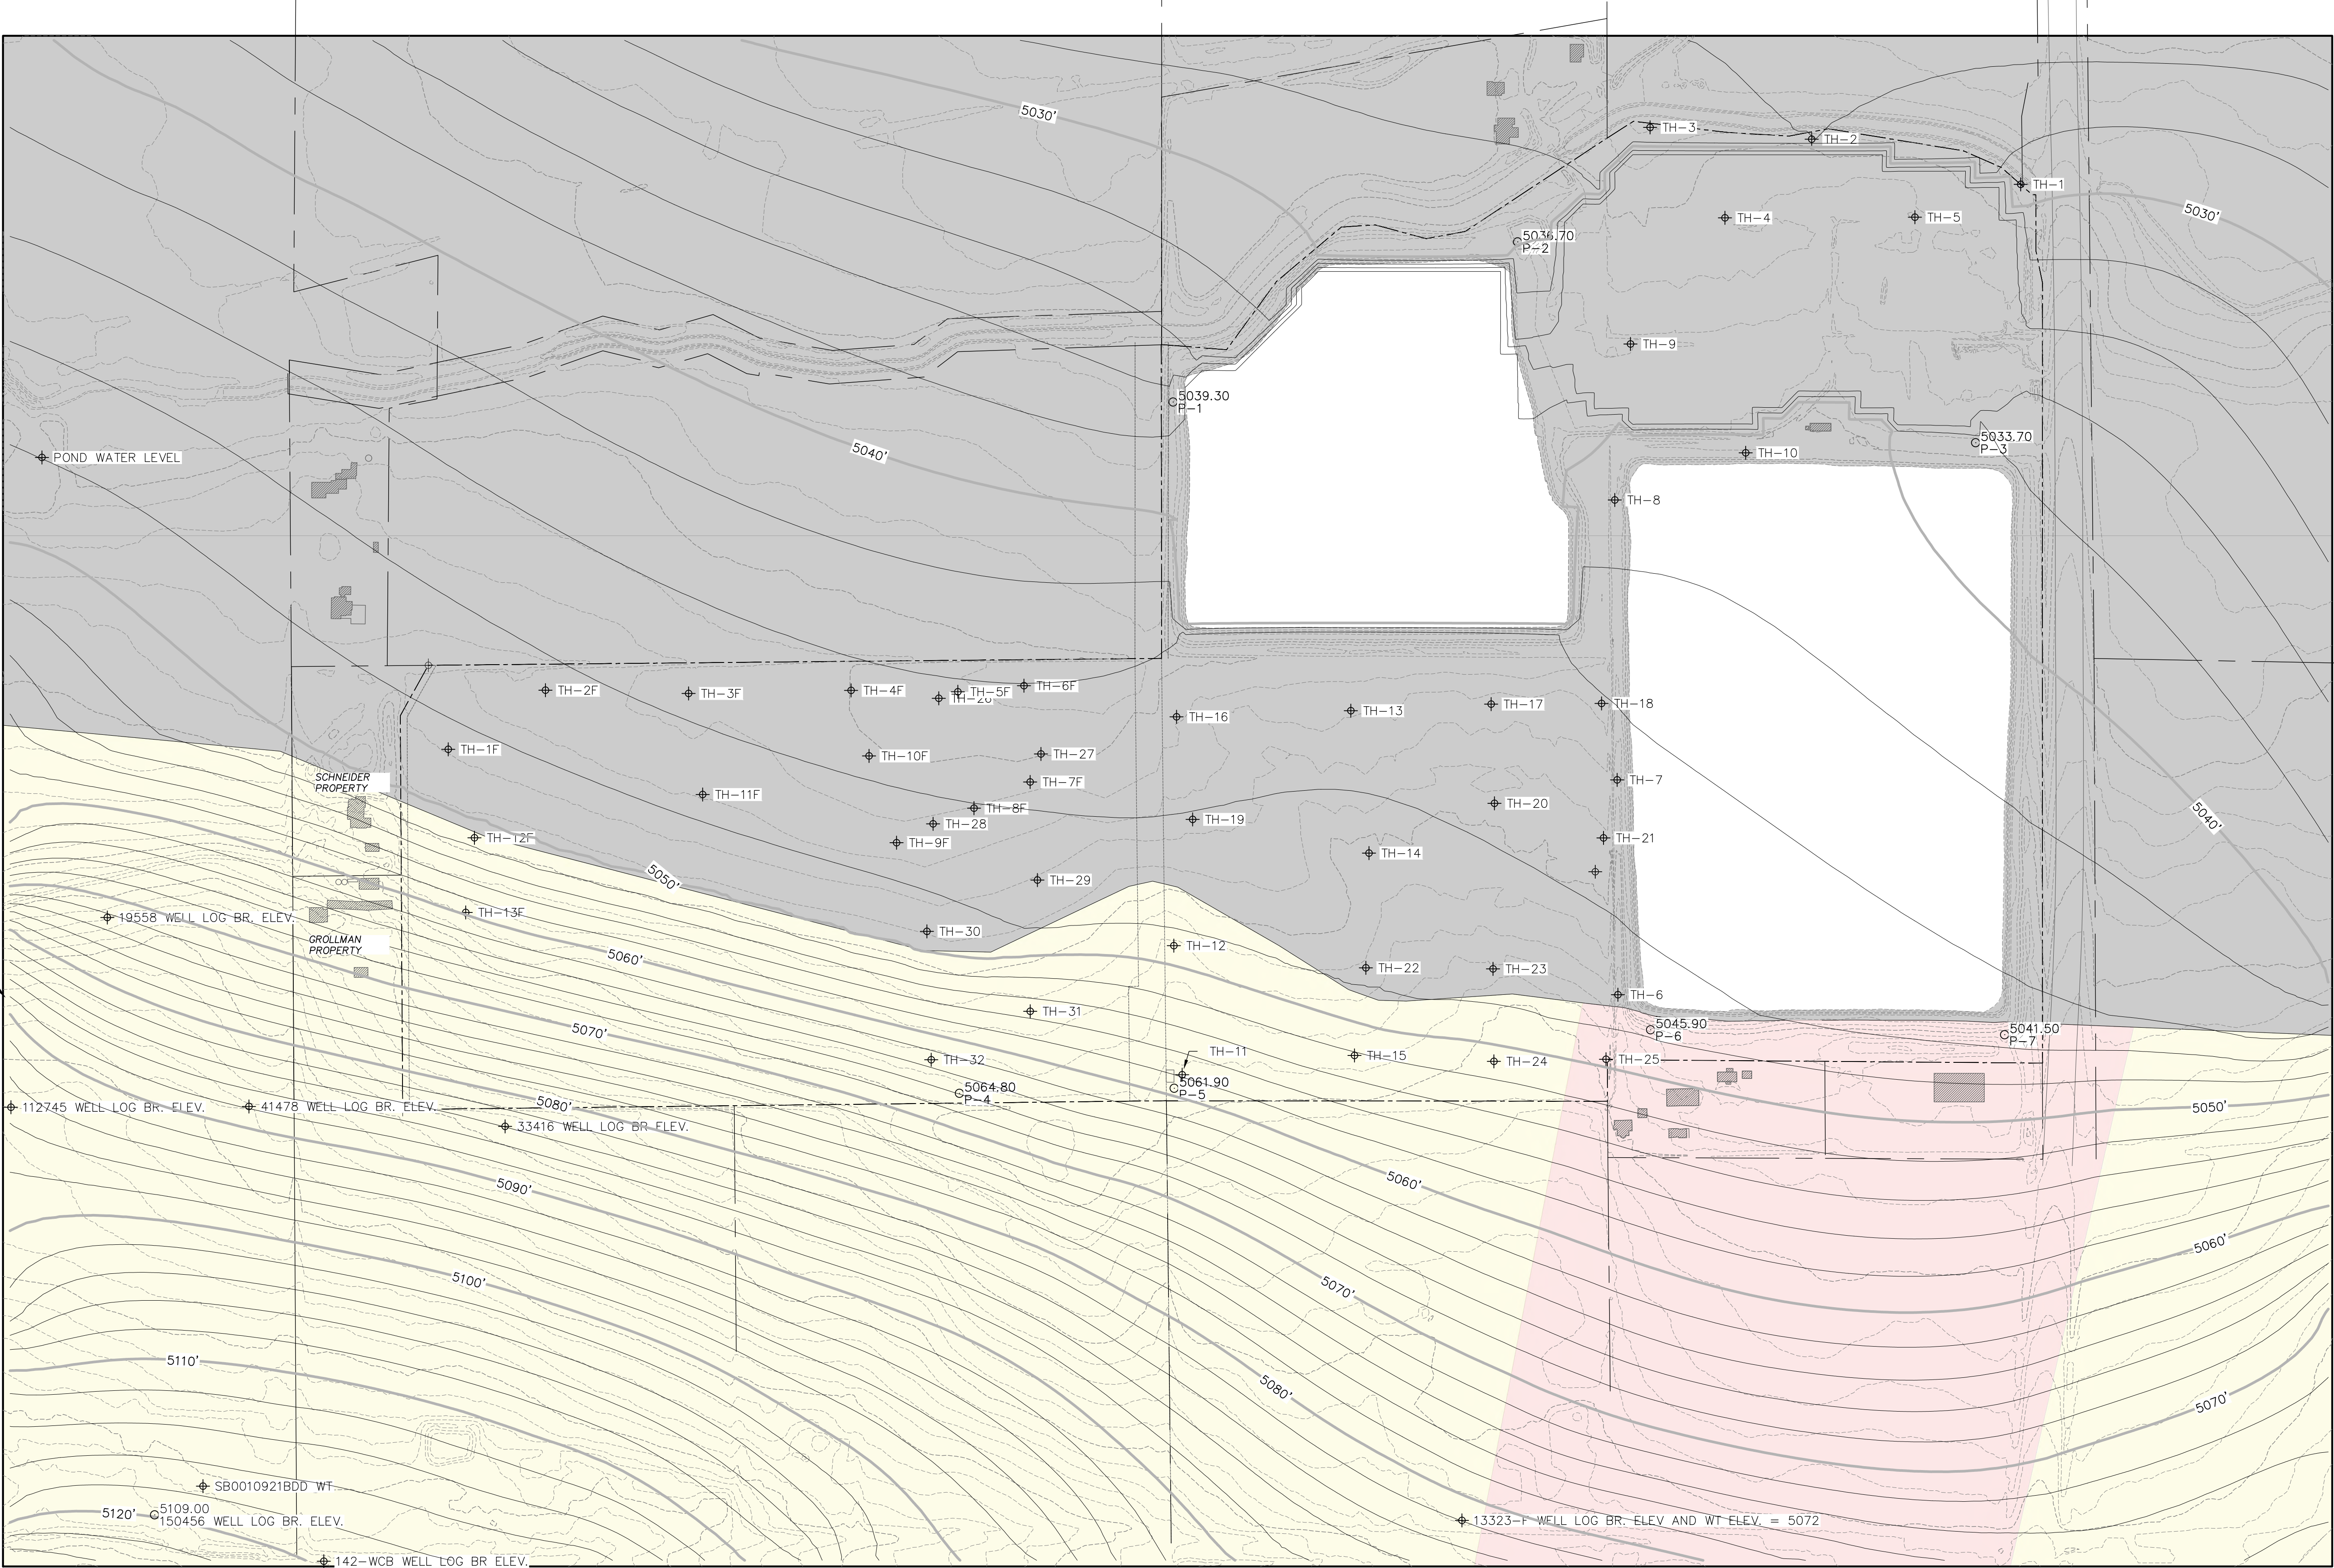

REVISIONS				OWNER CITY OF LAFAYETTE	CONTRACTOR ROCK PRODUCTS OF COLORADO L.L.C. P.O. BOX 893 BROOMFIELD, CO 80038	WSI Welland, Inc. Environmental & Engineering PO BOX 10007 BROOMFIELD, CO 80020 PH 303-443-9621			PROJECT			SHEET
REV	DESCRIPTION	DATE	APPROVED						GOOSE HAVEN RESERVOIRS COMPLEX EXPANSION #2, #4 – MODFLOW OUTPUT MODFLOW OUTPUT PRE-MINING			GW-1
									DRAWING NO. 1 OF 1			REVISION 0
CAD FILE NAME		PLOT DATE		APPROVED	DATE	DESIGNED	CHECKED	DRAWN	CONTRACT	DATE	B.A. JOB	SCALE
PRE-MINING MODFLOW OUT.DWG		1/13/23				PFW	RB	PFW		January 13, 2023	113136-000	1"=250'

LEGEND

HYDRAULIC CONDUCTIVITY

K=12 FT/DAY

K=10 FT/DAY

K=50 FT/DAY

MODFLOW OUTPUT HEAD

MAJOR CONTOUR (10FT)

MODFLOW OUTPUT HEAD

MINOR CONTOUR (2FT)

DWR WELL LOG



EXISTING PIEZOMETERS

5109.00

150456 WELL LOG BR. ELEV.

5061.90

P-5

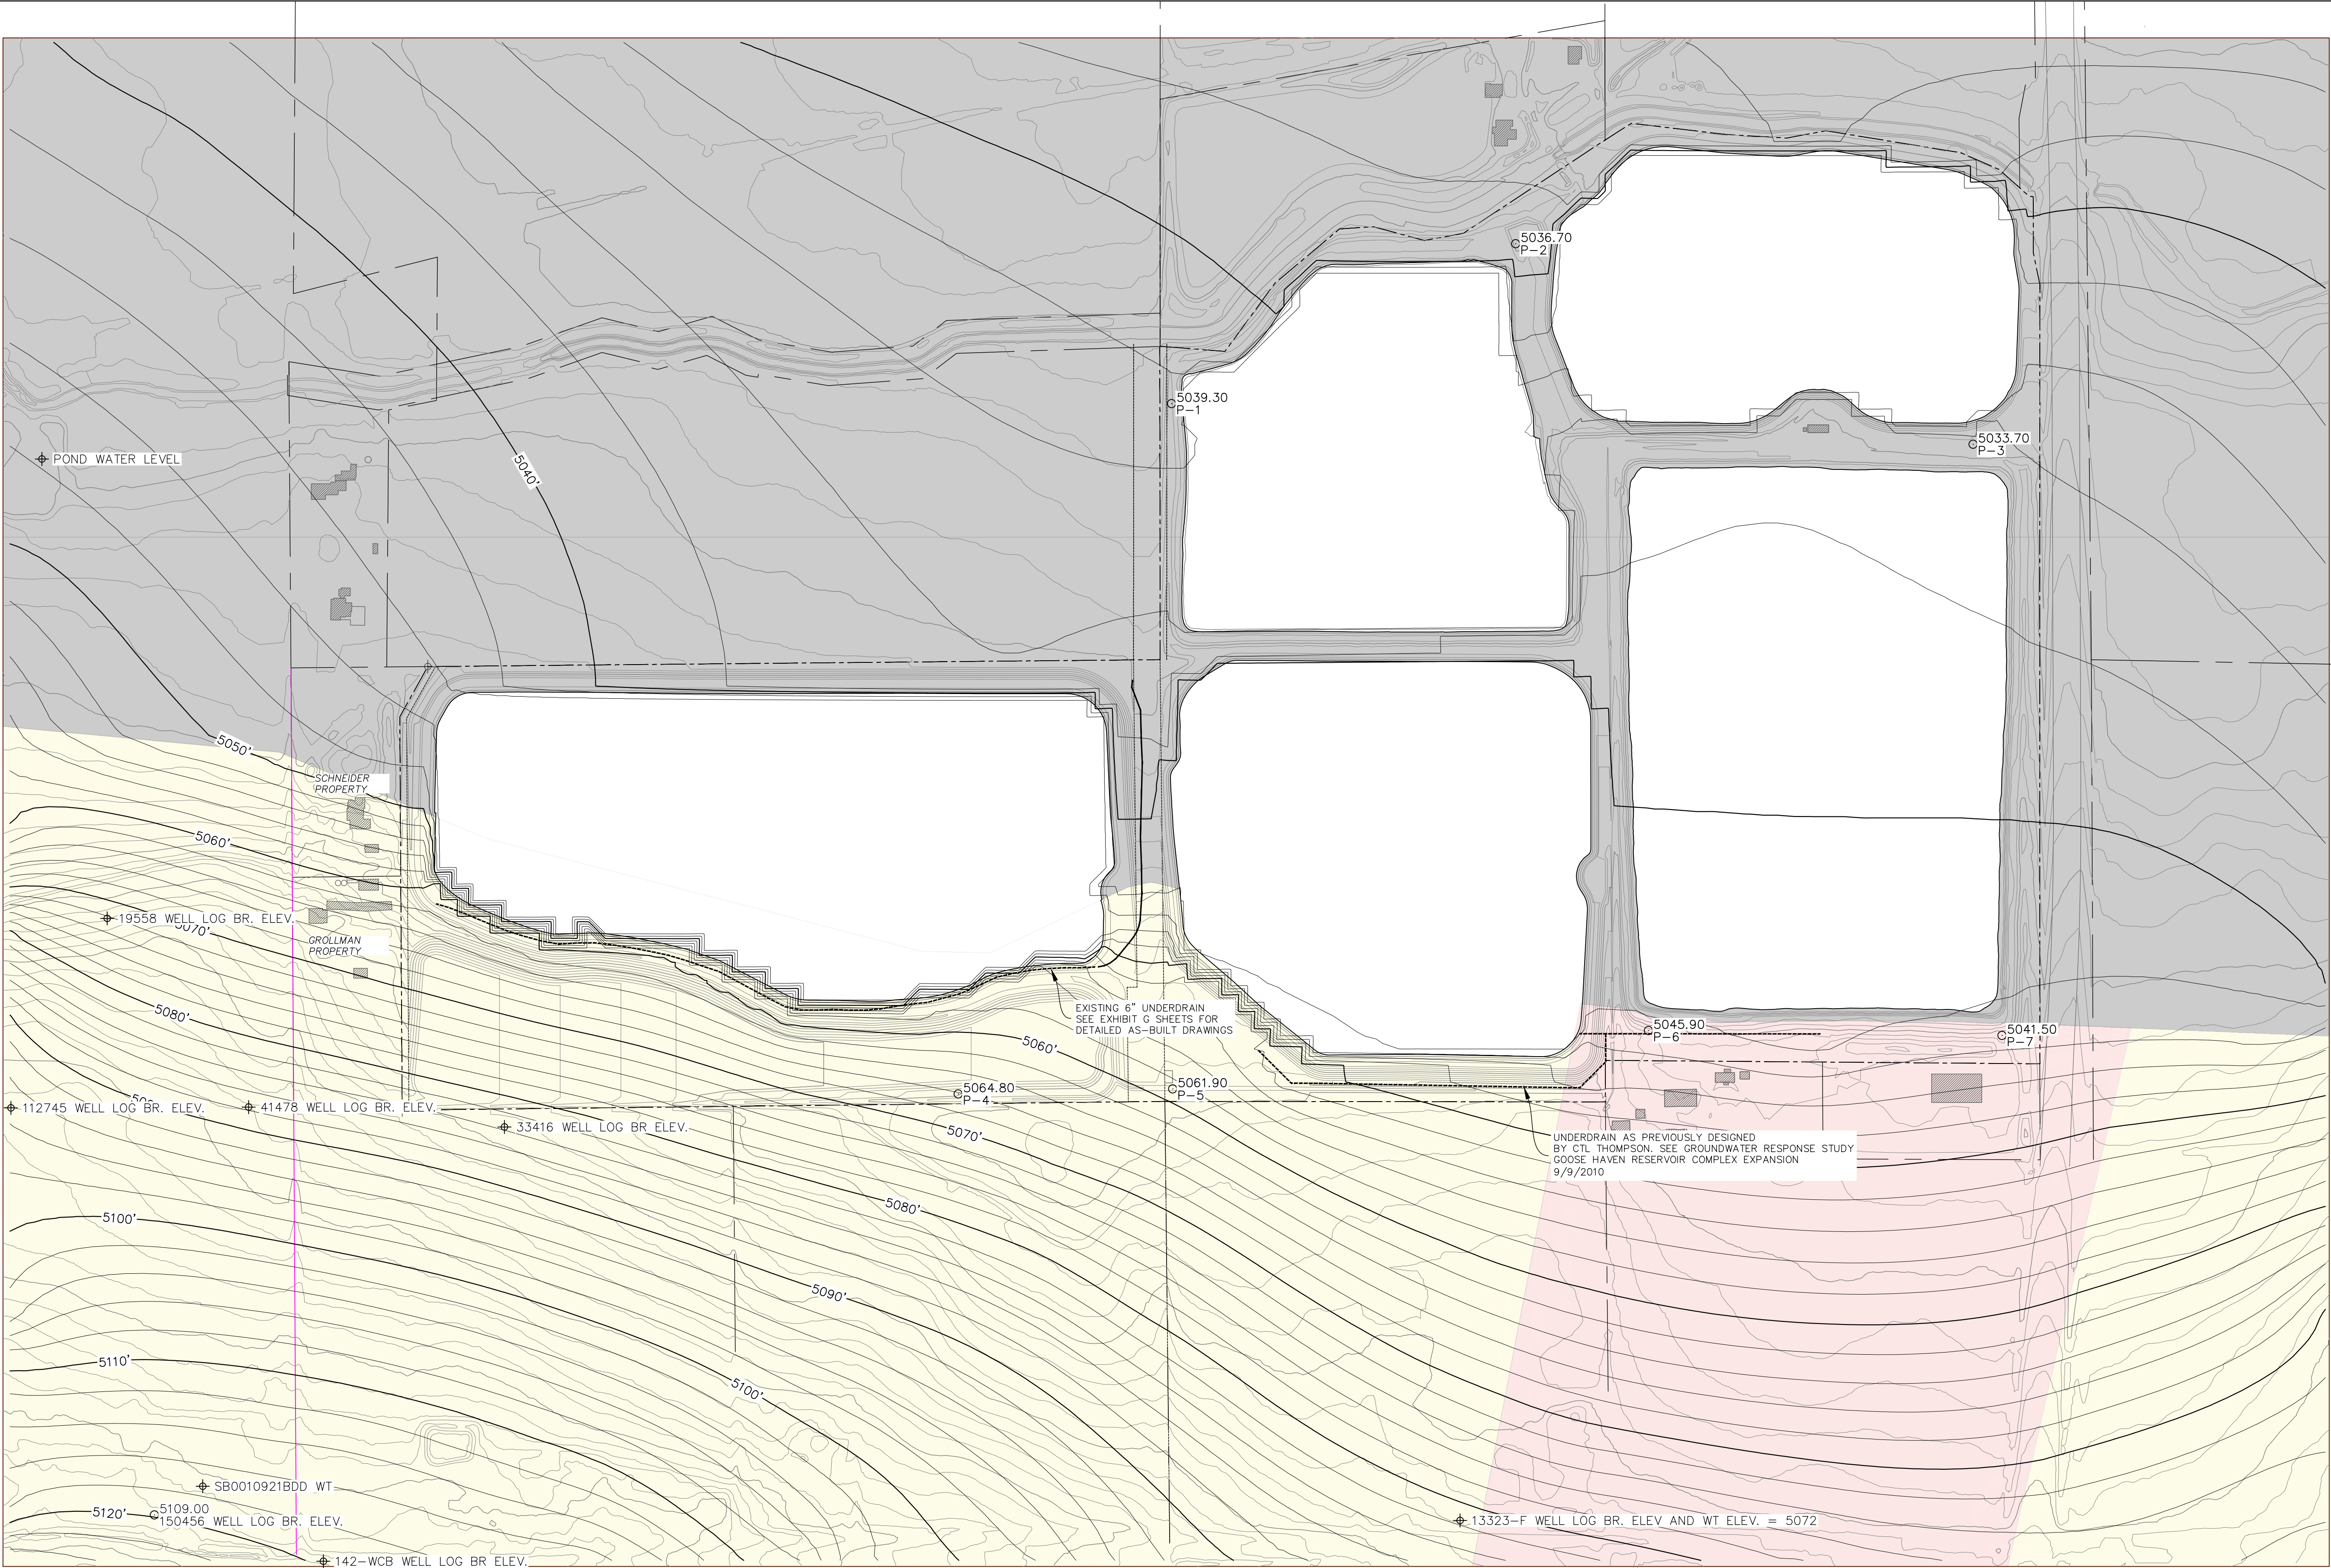

REVISIONS				OWNER CITY OF LAFAYETTE	CONTRACTOR ROCK PRODUCTS OF COLORADO L.L.C. P.O. BOX 893 BROOMFIELD, CO 80038		PROJECT GOOSE HAVEN RESERVOIRS COMPLEX EXPANSION #2, #4 – MODFLOW OUTPUT RECLAMATION			SHEET GW-2	
REV	DESCRIPTION	DATE	APPROVED				DRAWING NO. 1 OF 1				
							REVISION 0				
							SCALE 1"=250'				
CAD FILE NAME		PLOT DATE		APPROVED	DATE	DESIGNED	CHECKED	DRAWN	CONTRACT	DATE	B.A. JOB
RECLAMATION MODFLOW OUT COMP.DWG		1/13/23				PFW	RB	PFW		January 13, 2023	113136-000


LEGEND

MODFLOW OUTPUT DELTA HEAD
MAJOR CONTOUR (2.5FT)

MODFLOW OUTPUT DELTA HEAD
MINOR CONTOUR (0.5FT)

DWR WELL LOG
5109.00
150456 WELL LOG BR. ELEV.
EXISTING PIEZOMETERS
P-5

PROPOSED PIEZOMETERS
P-5

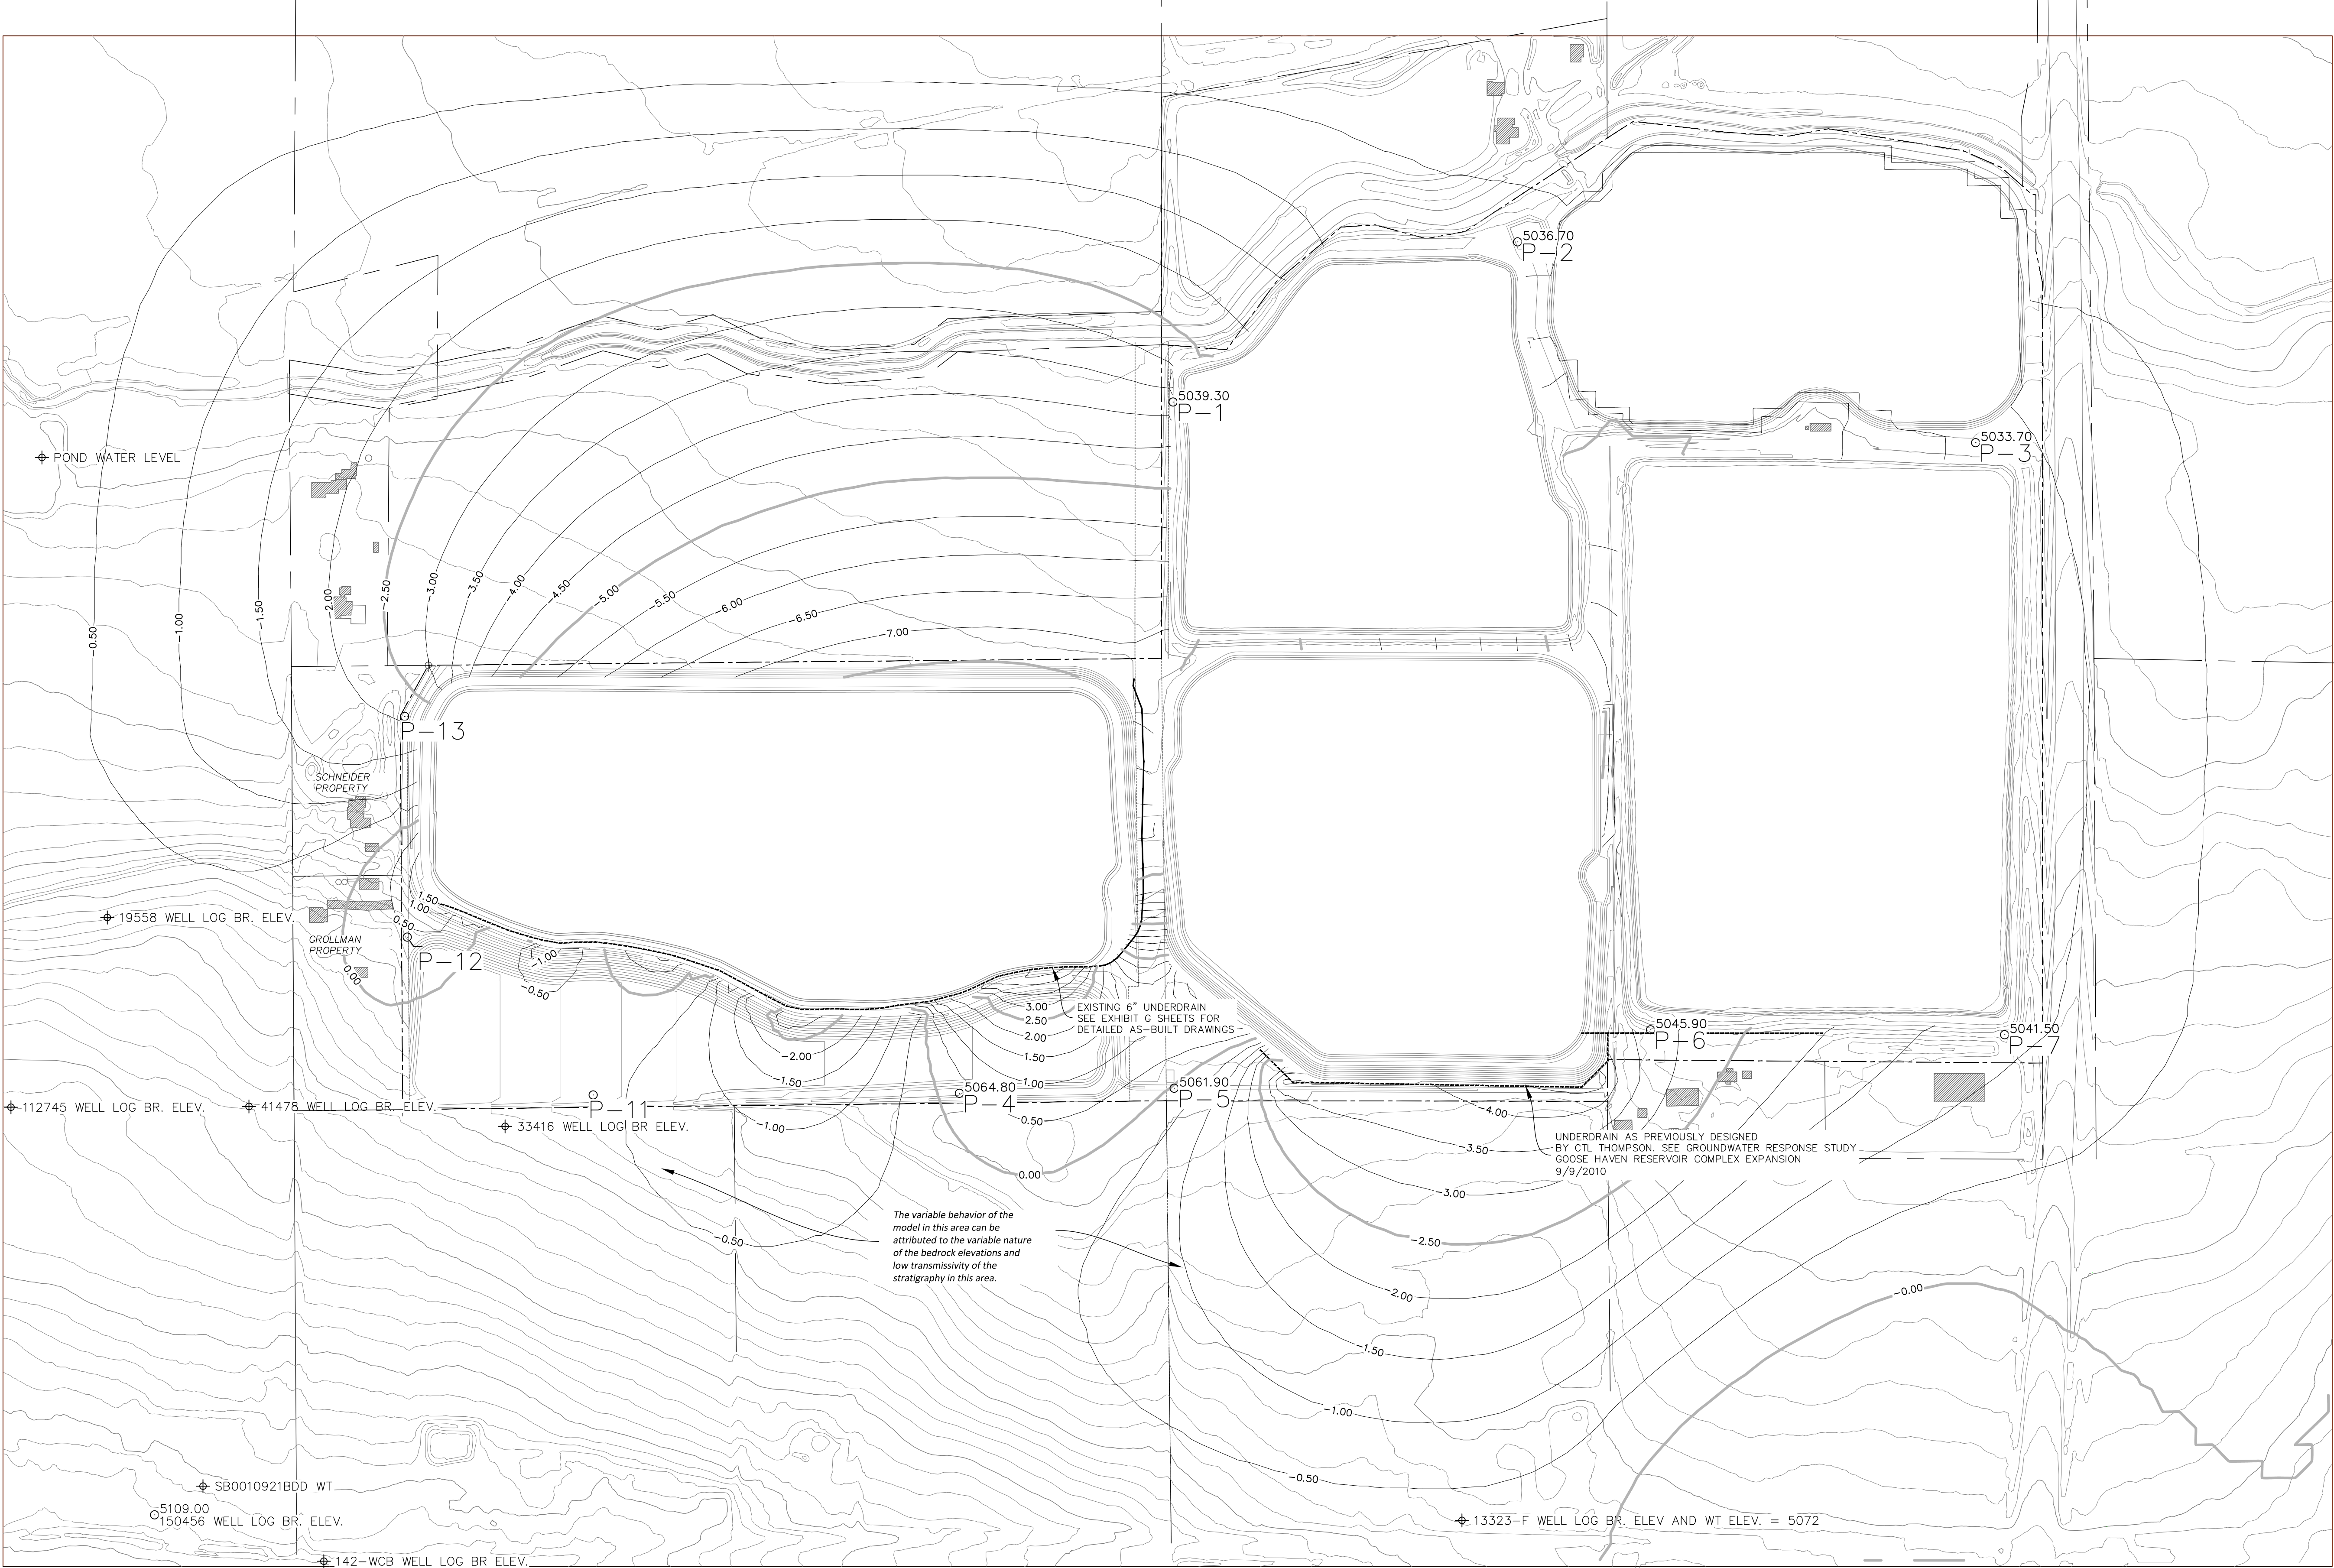

REVISIONS				OWNER CITY OF LAFAYETTE	CONTRACTOR ROCK PRODUCTS OF COLORADO L.L.C. P.O. BOX 893 BROOMFIELD, CO 80038	 WSI Welland, Inc. Environmental & Engineering PO BOX 10007 BROOMFIELD, CO 80020 PH 303-443-9921			PROJECT GOOSE HAVEN RESERVOIRS COMPLEX EXPANSION #2, #4 – MODFLOW OUTPUT PRE–MINING/RECLAMATION DELTA				SHEET GW-3
REV	DESCRIPTION	DATE	APPROVED						DRAWING NO. 1 OF 1				
									REVISION 0				
									SCALE 1"=250'				
CAD FILE NAME RECLAMATION MODFLOW OUT.DWG		PLOT DATE 1/13/23		APPROVED	DATE	DESIGNED PFW	CHECKED RB	DRAWN PFW	CONTRACT	DATE January 13, 2023	B.A. JOB 113136–000		

LOG OF WELL
DESCRIPTION OF MATERIAL DRILLED METHOD OF DRILLING *Rotary*

Feet

00

to *4**8* to *15**15* to *25**25* to *72*

to

to

Clay
yellow clay
gray shale
Blue shale

APPENDIX A

COLORADO DIVISION OF WATER RESOURCES

1313 Sherman Street - Room 818
Denver, Colorado 80203THIS FORM MUST BE SUBMITTED
WITHIN 60 DAYS OF COMPLETION
OF THE WORK DESCRIBED HERE
ON. TYPE OR PRINT IN BLACK
INK.

WELL COMPLETION AND PUMP INSTALLATION REPORT

PERMIT NUMBER 112745

RECEIVED

DEC 14 1981

WATER RESOURCES
ENGINEER
C.O.D.WELL OWNER Boulder Valley FarmsSE $\frac{1}{4}$ of the NW $\frac{1}{4}$ of Sec. 21ADDRESS PO Box 883
Boulder, CO 80306

T. 1 N. R. 69 W. 6th P.M.

DATE COMPLETED October 30, 19 81

HOLE DIAMETER

9 in. from 0 to 22 ft.

5 3/4 in. from 22 to 240 ft.

in. from to ft.

DRILLING METHOD Air rotaryCASING RECORD: Plain CasingSize 6 5/8 kind Steel from -1 to 22 ft.Size 4 1/2 kind PVC from 10 to 140 ft.

Size & kind from to ft.

Perforated Casing

Size 4 1/2 kind PVC from 140 to 240 ft.

Size & kind from to ft.

Size & kind from to ft.

GROUTING RECORD

Material CementIntervals 8' - 22'Placement Method PouredGRAVEL PACK: Size N A

Interval

TEST DATA

Date Tested October 30, 1981Static Water Level Prior to Test 15 ft.Type of Test Pump AirLength of Test Two hoursSustained Yield (Metered) 60+ GPMFinal Pumping Water Level 240'

WELL LOG

From	To	Type and Color of Material	Water Loc.
0	8	Sand & clay	
8	10	Gravel	
10	37	Weathered sandstone	
37	40	Cap rock	
40	50	Weathered sandstone	
50	52	Cap rock	
52	57	Weathered sandstone	
57	138	Foxhill sandstone	
138	150	Shale	
150	225	Foxhill sandstone	
225	240	Shale	
		5 GPM @ 37'	
		3 GPM @ 70'	
		4 GPM @ 90'	
		13 GPM @ 155'	
		35 GPM @ 180 - 220'	
The testing of production of water from this well is for information only. This report, however, is not intended to be a condition of any future water right application or to be used as a basis for any action as to future production. This is dependent upon future conditions.			
TOTAL DEPTH <u>240'</u>			

Use additional pages necessary to complete log.

WELL LOG 19558

How Drilled Rotary

(if more space is required use additional sheet)

Dated May 19, 1964

13744-F

WELL LOG

APPENDIX A

WELL DATA

From	To	Type of Material	Water Loc.
0	9	brown clay	
9	47	fine clay-like sand	X
Use additional paper if necessary to complete log.			

Type Drilling reverse rotaryHOLE DIAMETER:

36 in. from 0 ft. to 47 ft.
 _____ in. from _____ ft. to _____ ft.
 _____ in. from _____ ft. to _____ ft.

CASING RECORDPlain CasingSize 24, kind steel from 1 ft. to 27 ft.

Size _____, kind _____ from _____ ft. to _____ ft.

Size _____, kind _____ from _____ ft. to _____ ft.

Perforated CasingSize 24, kind steel from 27 ft. to 47 ft.

Size _____, kind _____ from _____ ft. to _____ ft.

Size _____, kind _____ from _____ ft. to _____ ft.

GROUTING RECORDMaterial puddled clayIntervals 0-10

Placement Method _____

GRAVEL PACK RECORDSize pea Interval 10-47TEST DATADate Tested June 26, 1969Type of Pump turbineLength of Test five hoursConstant Yield 52 GPMDrawdown 18' - 8"WELL DRILLERS STATEMENT

The undersigned, being duly sworn, deposes and says: he is the driller of the well hereon described; he has read the statement made hereon; knows the content thereof; and the same is true of his own knowledge.

X Carl R. Larson
 Carl R. Larson
 License No. 162

State of Colorado, County of Arapahoe) ssSubscribed and sworn to before me this 6th day of January, 19 70My Commission expires Dec 6, 1972

Notary Public

WELL LOG

APPENDIX A

WELL DATA

From	To	Type of Material	Water Loc.
0	12	Clay Rocks	
12	15	Rocks, -	
15	20	Pea Gravel	
20	35	Light slate	
35	36	Sandy shale	
36	50	shale	
50	51	Sandy shale	
51	73	shale	
73	75	Sand shale	
75	92	Blue shale	
92	94	Sandy shale	
94	100	Blue shale	

Use additional paper if necessary to complete log.

Type Drilling Rotary

HOLE DIAMETER:

8 in. from 0 ft. to 23 ft.
5 5/8 in. from 23 ft. to 100 ft.
 _____ in. from _____ ft. to _____ ft.

CASING RECORD

Plain Casing

Size 6, kind PLASTIC from 0 ft. to 23 ft.
 Size _____, kind _____ from _____ ft. to _____ ft.
 Size _____, kind _____ from _____ ft. to _____ ft.

Perforated Casing

Size 5 5/8 kind OPEN from 23 ft. to 100 ft.
 Size _____, kind _____ from _____ ft. to _____ ft.
 Size _____, kind _____ from _____ ft. to _____ ft.

GROUTING RECORD

Material Cement
 Intervals From 5 ft to 12 ft
 Placement Method Poured Back Casing

GRAVEL PACK RECORD

Size _____ Interval _____

TEST DATA

Date Tested June 4-70
 Type of Pump Barlow
 Length of Test 3 hrs
 Constant Yield 15 gal
 Drawdown 17 ft

WELL DRILLERS STATEMENT

The undersigned, being duly sworn, deposes and says: he is the driller of the well hereon described; he has read the statement made hereon; knows the content thereof, and the same is true of his own knowledge.

X Pon Wanuka
#2
 License No. _____

State of Colorado, County of _____ ss

Subscribed and sworn to before me this _____ day of _____, 19____

My Commission expires _____, 19____

Notary Public

APPENDIX A LOG AND HISTORY

WELL LOG

Ground Elevation _____

Type Drilling Rotary

From	To	Type of Material	Water Loc.	Perf.
0	14	Sandy clay		
14	47	Br. & Yellow sandstone		
47	53	Grey sandstone		
53	55	Sandrock		
55	62	Gr. sandstone & sandy clay		
62	65	Shale		
65	84	Sandstone		
84	90	Shale & sand stks.		
90	105	Sandstone		
105	115	Shale		
115	124	Sandstone		
124	126	Sandrock		
126	157	Sandstone	X	X
157	163	Sandrock		
163	220	Sandstone	x	x
220	224	Shale		
224	267	Sandstone	X	X
267		Sandrock.		

Use additional paper if necessary to complete log and attach.

State of Colorado)
County of _____) ss

WELL DRILLERS STATEMENT

Kenneth L. Rutt being duly sworn, deposes and says: he is the driller of the above described well; he has read the above map and statement, knows the content thereof, and the same is true of his own knowledge.

License No. 9

Subscribed and sworn to before me this _____ day of _____, 19____

My Commission expires _____, 19____.

Notary Public

WELL DATA

Date Started April 15, 1968Date Completed April 20, 1968

Hole Diameter:

9 in. from 0 ft. to 55 ft.
7 7/8 in. from 55 ft. to 267 ft.
 _____ in. from _____ ft. to _____ ft.

CASING RECORD packer set 58'

Cemented from 10-55

Plain Casing

Size 6 5/8 kind steel from 0 ft. to 267 ft.

Size _____, kind _____ from _____ ft. to _____ ft.

Size _____, kind _____ from _____ ft. to _____ ft.

Perforated Casing

Size 6 5/8 kind steel from 131 ft. to 267 ft.

Size _____, kind _____ from _____ ft. to _____ ft.

Size _____, kind _____ from _____ ft. to _____ ft.

TEST DATA

Date Tested April 20, 1968Type of Pump BalerLength of Test 4 hrs.Constant Yield 30Drawdown to 85'

PUMP DATA (To be filled in)

Type of Pump Not installed

Outlet Size _____

Driven by _____

Horsepower _____

DEPTH TO WATER 25TOTAL DEPTH 267'

FORM TO BE MADE OUT IN QUADRUPLICATE:

Original WHITE (both sides) & Triplicate GREEN Copy must be filed with the State Engineer within 30-days after well is completed. Duplicate PINK copy is for the Owner & YELLOW copy for the Driller. WHITE FORM MUST BE AN ORIGINAL COPY ON BOTH SIDES AND SIGNED.

APPENDIX A

RECEIVED

COLORADO DIVISION OF WATER RESOURCES JAN 27 1988

818 Centennial Bldg., 1313 Sherman St.

Denver, Colorado 80203

TYPE OR
PRINT IN BLACK INK.
COPY OF ACCEPTED
STATEMENT MAILED
ON REQUEST.

STATE OF COLORADO

COUNTY OF Boulder

SS. _____

WATER RESOURCES
STATE ENGINEER
AFFIDAVIT

____ STATEMENT OF BENEFICIAL USE OF GROUND WATER
____ AMENDMENT OF EXISTING RECORD
☒ LATE REGISTRATION

150456

PERMIT NUMBER _____

LOCATION OF WELL _____

THE AFFIANT(S) The Bixler Company
whose mailing % Leroy Overfelt
address is 5605 North 115th

County BoulderSE $\frac{1}{4}$ of the NW $\frac{1}{4}$, Section 21City Longmont, CO 80501

(STATE)

(ZIP)

Twp. 1 N $\frac{1}{2}$ Rng. 69 W $\frac{1}{2}$ 6th P.M.

(IN OR SI)

(E OR W)

being duly sworn upon oath, deposes and says that he (they) is (are) the owner(s) of the well described hereon; the well is located as described above, at distances of 2490 feet from the North section line and 2110 feet from the

(NORTH OR SOUTH)

West section line; water from this well was first applied to a beneficial use for the purpose(s) described herein on the 1

day of July, 1958; the maximum sustained pumping rate of the well is 15 gallons per minute, the pumping rate claimed hereby is 15 gallons per minute; the total depth of the well is 16 feet; the average annual amount of water to be diverted is 1 acre-feet; for which claim is hereby made for domestic

purpose(s); the legal description of the land on which the water from this well is used is

SE $\frac{1}{4}$ of the NW $\frac{1}{4}$, Sec. 21, T 1N, R 69W of which

.1 acres are irrigated and which is illustrated on the map on the reverse side of this form; that this well was completed in compliance with the permit approved therefor; this statement of beneficial use of ground water is filed in compliance with law; he (they) has (have) read the statements made hereon; knows the content thereof; and that the same are true of his (their) knowledge.

(COMPLETE REVERSE SIDE OF THIS FORM)

Signature(s) Leroy Overfelt

Subscribed and sworn to before me on this 25th day of Jan, 1988

My Commission expires: 9-30-91

(SEAL)

ACCEPTED FOR FILING BY THE STATE ENGINEER OF COLORADO
PURSUANT TO THE FOLLOWING CONDITIONS:

1) IN ACCORDANCE WITH CRS 37-92-602(5) FOR HISTORIC USE AS INDICATED BELOW AND DESCRIBED IN CRS 37-92-602(1)(b).

2) A WELL PRODUCING 15 G.P.M. OR LESS AND USED FOR ORDINARY HOUSEHOLD PURPOSES INSIDE ONE SINGLE FAMILY DWELLING, FIRE PROTECTION, THE WATERING OF DOMESTIC ANIMALS AND POULTRY, AND THE IRRIGATION OF NOT MORE THAN 4,300 SQUARE FEET OF HOME GARDENS AND LAWNS. GRS 2/5/88

FOR OFFICE USE ONLY

Court Case No. _____

Prior. _____ Mo. _____ Day _____ Yr. _____

Div. 1 City 07Sec. _____ $\frac{1}{4}$ _____ $\frac{1}{4}$ _____ $\frac{1}{4}$ Well Use 1Dist 06 Basin _____ Man Dis _____

FEB 05 1988

DATE

STATE ENGINEER

BY

STATE OF COLORADO

DIVISION OF WATER RESOURCES
OFFICE OF THE STATE ENGINEER

RECEIVED

DEC 29 1969

WATER SECT.

RADO

RECEIVED

Permit No. 2433
 IDWD 5-6
 Use 6
 Registered _____

MAP AND STATEMENT FOR WATER WELL FILING

PERMIT NUMBER 13323-F

STATE OF COLORADO)

COUNTY OF BOULDER)

SS

WELL LOCATION

BOULDER

County

Know all men by these presents: That the undersigned

ROY E. GRAHAMclaimant(s), whose address is 10405 Isabelle Rd.City Lafayette Colorado, 80026, states:

Claimant(s) is (are) the owner(s) of the well described hereon; the

total number of acres of land irrigated from this well is 15;work was commenced on this well by actual construction 17thday of December, 1969;the yield from said well is 40 (gpm), forwhich claim is hereby made for Irrigation purposes;

that the average annual amount of water to be diverted is

25 acre-feet; and that the aforementioned

statements are made and this map and statement are filed in


compliance with the law.

X Roy E. Graham
 Claimant(s)Subscribed before me on this 26th day ofDecember, 1969.My commission expires My Commission Expires July 3, 1973Marcelle Ball
 Notary Public

WELL DATA

Date Completed 12-17-69Static Water Level at 5 (5) ft. 5 ftTotal Depth 15 ft.

INDICATE WELL LOCATION ON DIAGRAM

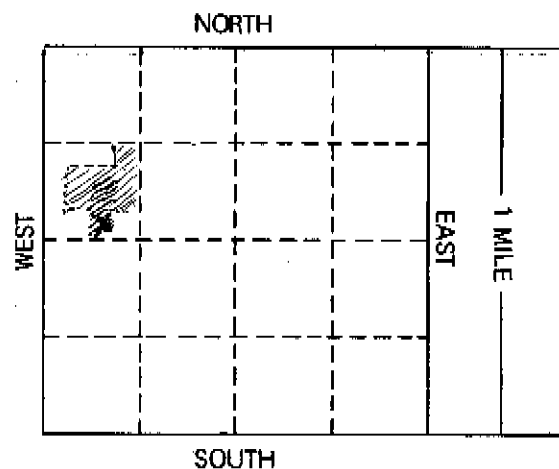WELL SHALL BE LOCATED WITH REFERENCE TO
GOVERNMENT SURVEY CORNERS OR MONUMENTS,
OR SECTION LINES BY DISTANCE AND BEARING.2602 ft. from North section line.
(North or South)865 ft. from West section line.
(East or West)Ground Water Basin BOULDER VALLEYWater Management
District Southern District

Domestic wells may be located by the following:

LOT _____, BLOCK _____

SUBDIVISION _____

FILING # _____

ACCEPTED FOR FILING IN THE OFFICE OF THE STATE ENGINEER OF COLORADO ON THIS

____ DAY OF _____, 19____.

State Engineer

FORM TO BE MADE OUT IN QUADRUPPLICATE: WHITE FORM MUST BE AN ORIGINAL COPY ON BOTH SIDES AND SIGNED.
 WHITE copy & GREEN copy must be filed with the State Engineer within 30 days after well is completed; PINK copy
 is for the Owner & YELLOW copy is for the Driller.

WELL DATA

Notary Public

My Commission expires My Commission Expires July 3, 1973, 1973

APPENDIX B

MODFLOW-2005
U.S. GEOLOGICAL SURVEY MODULAR FINITE-DIFFERENCE GROUND-WATER FLOW
MODEL

VERSION 1.12.00 2/3/2017

LIST FILE: GH-1.out

UNIT 2

OPENING "GH-1.hed"

FILE TYPE:DATA(BINARY) UNIT 3 STATUS:UNKNOWN
FORMAT:UNFORMATTED ACCESS:STREAM

OPENING "GH-1.ccf"

FILE TYPE:DATA(BINARY) UNIT 40 STATUS:UNKNOWN
FORMAT:UNFORMATTED ACCESS:STREAM

OPENING "GH-1.lmt"

FILE TYPE:LMT6 UNIT 4 STATUS:OLD
FORMAT:FORMATTED ACCESS:SEQUENTIAL

#

Global Input Files

OPENING "GH-1.dis"

FILE TYPE:DIS UNIT 7 STATUS:OLD
FORMAT:FORMATTED ACCESS:SEQUENTIAL

#

Flow Process Input
Files

OPENING "GH-1.ba6"

FILE TYPE:BAS6 UNIT 8 STATUS:OLD
FORMAT:FORMATTED ACCESS:SEQUENTIAL

OPENING "GH-1.lpf"

FILE TYPE:LPF UNIT 9 STATUS:OLD
FORMAT:FORMATTED ACCESS:SEQUENTIAL

OPENING "GH-1.oc"

FILE TYPE:OC UNIT 10 STATUS:OLD
FORMAT:FORMATTED ACCESS:SEQUENTIAL

OPENING "GH-1.rch"

FILE TYPE:RCH UNIT 1 STATUS:OLD
FORMAT:FORMATTED ACCESS:SEQUENTIAL

OPENING "GH-1.hfb"

FILE TYPE:HFB6 UNIT 12 STATUS:OLD
FORMAT:FORMATTED ACCESS:SEQUENTIAL

OPENING "GH-1.pcg"

FILE TYPE:PCG UNIT 13 STATUS:OLD
FORMAT:FORMATTED ACCESS:SEQUENTIAL

BAS -- BASIC PACKAGE, VERSION 7, 5/2/2005 INPUT READ FROM UNIT 8

APPENDIX B

MODFLOW was compiled using mixed precision
Precision of REAL variables: 6
Precision of DOUBLE PRECISION variables: 15

DISCRETIZATION INPUT DATA READ FROM UNIT 7
MF2K DISCRETIZATION FILE

NLAY NROW NCOL NPER TIMEUNITS LENUNITS
1 LAYERS 93 ROWS 141 COLUMNS
1 STRESS PERIOD(S) IN SIMULATION
MODEL TIME UNIT IS DAYS
MODEL LENGTH UNIT IS FEET
Confining bed flag for each layer:
0

DEL R
READING ON UNIT 7 WITH FORMAT: (FREE)

DEL C
READING ON UNIT 7 WITH FORMAT: (FREE)

STRESS PERIOD FLAG	LENGTH	TIME STEPS	MULTIPLIER FOR DELT	SS
----- ----				
1	1.000000	1	1.000	SS

STEADY-STATE SIMULATION

#GMS MODFLOW Simulation
#02 January 2023
THE FREE FORMAT OPTION HAS BEEN SELECTED

BOUNDARY ARRAY FOR LAYER 1
READING DATA FROM HDF5 FILE

AQUIFER HEAD WILL BE SET TO -999.00 AT ALL NO-FLOW NODES
(IBOUND=0).

OUTPUT CONTROL IS SPECIFIED ONLY AT TIME STEPS FOR WHICH OUTPUT IS
DESIRED
COMPACT CELL-BY-CELL BUDGET FILES WILL BE WRITTEN

APPENDIX B

AUXILIARY DATA WILL BE SAVED IN CELL-BY-CELL BUDGET FILES
 HEAD PRINT FORMAT CODE IS 0 DRAWDOWN PRINT FORMAT CODE IS 0
 HEADS WILL BE SAVED ON UNIT 3 DRAWDOWNS WILL BE SAVED ON UNIT 0

LPF -- LAYER-PROPERTY FLOW PACKAGE, VERSION 7, 5/2/2005

INPUT READ FROM UNIT 9

CELL-BY-CELL FLOWS WILL BE SAVED ON UNIT 40

HEAD AT CELLS THAT CONVERT TO DRY= -888.00

No named parameters

LAYER FLAGS:

LAYER	LAYTYP	LAYAVG	CHANI	LAYVKA
LAYWET				

```

-----
---
1          0          0    -1.000E+00          1
0
  
```

INTERPRETATION OF LAYER FLAGS:

LAYER TYPE	INTERBLOCK TRANSMISSIVITY	HORIZONTAL ANISOTROPY	DATA IN ARRAY VKA
LAYER (LAYWET)	(LAYTYP)	(LAYAVG)	(CHANI)
WETTABILITY			

(LAYVKA)

```

-----
---
1    CONFINED    HARMONIC    VARIABLE    ANISOTROPY    NON-
WETTABLE
  
```

WETTING CAPABILITY IS NOT ACTIVE IN ANY LAYER

RCH -- RECHARGE PACKAGE, VERSION 7, 5/2/2005 INPUT READ FROM UNIT 1

#GMS_HDF5_01

No named parameters

OPTION 3 -- RECHARGE TO HIGHEST ACTIVE NODE IN EACH VERTICAL COLUMN

CELL-BY-CELL FLOWS WILL BE SAVED ON UNIT 40

0 Recharge parameters

HFB -- HORIZONTAL-FLOW BARRIER PACKAGE, VERSION 7, 5/2/2005.

INPUT READ FROM UNIT 12

0 PARAMETERS DEFINE A MAXIMUM OF 0 HORIZONTAL FLOW BARRIERS

312 HORIZONTAL FLOW BARRIERS NOT DEFINED BY PARAMETERS

0 HFB parameters

312 BARRIERS NOT DEFINED BY PARAMETERS

BARRIER	LAYER	IROW1	ICOL1	IROW2	ICOL2	HYDCHR
1	1	15	91	15	92	1.0000E-04
2	1	14	91	15	91	1.0000E-04

APPENDIX B

3	1	14	90	15	90	1.0000E-04
4	1	14	89	15	89	1.0000E-04
5	1	14	88	15	88	1.0000E-04
6	1	14	87	15	87	1.0000E-04
7	1	14	86	15	86	1.0000E-04
8	1	14	85	15	85	1.0000E-04
9	1	14	84	15	84	1.0000E-04
10	1	14	83	15	83	1.0000E-04
11	1	14	82	15	82	1.0000E-04
12	1	14	81	15	81	1.0000E-04
13	1	14	80	15	80	1.0000E-04
14	1	15	79	15	80	1.0000E-04
15	1	15	79	16	79	1.0000E-04
16	1	16	78	16	79	1.0000E-04
17	1	17	78	17	79	1.0000E-04
18	1	17	78	18	78	1.0000E-04
19	1	18	77	18	78	1.0000E-04
20	1	18	77	19	77	1.0000E-04
21	1	19	76	19	77	1.0000E-04
22	1	19	76	20	76	1.0000E-04
23	1	20	75	20	76	1.0000E-04
24	1	20	75	21	75	1.0000E-04
25	1	20	74	21	74	1.0000E-04
26	1	20	73	21	73	1.0000E-04
27	1	21	72	21	73	1.0000E-04
28	1	21	72	22	72	1.0000E-04
29	1	22	71	22	72	1.0000E-04
30	1	23	71	23	72	1.0000E-04
31	1	24	71	24	72	1.0000E-04
32	1	24	72	25	72	1.0000E-04
33	1	25	72	25	73	1.0000E-04
34	1	26	72	26	73	1.0000E-04
35	1	27	72	27	73	1.0000E-04
36	1	28	72	28	73	1.0000E-04
37	1	29	72	29	73	1.0000E-04
38	1	30	72	30	73	1.0000E-04
39	1	30	72	31	72	1.0000E-04
40	1	31	71	31	72	1.0000E-04
41	1	32	71	32	72	1.0000E-04
42	1	33	71	33	72	1.0000E-04
43	1	34	71	34	72	1.0000E-04
44	1	35	71	35	72	1.0000E-04
45	1	36	71	36	72	1.0000E-04
46	1	36	72	37	72	1.0000E-04
47	1	36	73	37	73	1.0000E-04
48	1	36	74	37	74	1.0000E-04
49	1	36	75	37	75	1.0000E-04
50	1	36	76	37	76	1.0000E-04
51	1	36	77	37	77	1.0000E-04
52	1	36	78	37	78	1.0000E-04
53	1	36	79	37	79	1.0000E-04
54	1	36	80	37	80	1.0000E-04
55	1	36	81	37	81	1.0000E-04
56	1	36	82	37	82	1.0000E-04

APPENDIX B

57	1	36	83	37	83	1.0000E-04
58	1	36	84	37	84	1.0000E-04
59	1	36	85	37	85	1.0000E-04
60	1	36	86	37	86	1.0000E-04
61	1	36	87	37	87	1.0000E-04
62	1	36	88	37	88	1.0000E-04
63	1	36	89	37	89	1.0000E-04
64	1	36	90	37	90	1.0000E-04
65	1	36	91	37	91	1.0000E-04
66	1	36	92	37	92	1.0000E-04
67	1	36	93	37	93	1.0000E-04
68	1	36	94	37	94	1.0000E-04
69	1	36	95	37	95	1.0000E-04
70	1	36	95	36	96	1.0000E-04
71	1	35	95	35	96	1.0000E-04
72	1	34	95	34	96	1.0000E-04
73	1	33	95	33	96	1.0000E-04
74	1	32	95	32	96	1.0000E-04
75	1	31	95	31	96	1.0000E-04
76	1	30	95	30	96	1.0000E-04
77	1	29	95	30	95	1.0000E-04
78	1	29	94	29	95	1.0000E-04
79	1	28	94	28	95	1.0000E-04
80	1	27	94	28	94	1.0000E-04
81	1	27	93	27	94	1.0000E-04
82	1	26	93	26	94	1.0000E-04
83	1	25	93	25	94	1.0000E-04
84	1	24	93	24	94	1.0000E-04
85	1	23	93	24	93	1.0000E-04
86	1	23	92	23	93	1.0000E-04
87	1	22	92	22	93	1.0000E-04
88	1	21	92	21	93	1.0000E-04
89	1	20	92	20	93	1.0000E-04
90	1	19	92	20	92	1.0000E-04
91	1	19	91	19	92	1.0000E-04
92	1	18	91	18	92	1.0000E-04
93	1	17	91	17	92	1.0000E-04
94	1	16	91	16	92	1.0000E-04
95	1	8	119	9	119	1.0000E-04
96	1	8	118	9	118	1.0000E-04
97	1	8	117	9	117	1.0000E-04
98	1	8	116	9	116	1.0000E-04
99	1	8	115	9	115	1.0000E-04
100	1	8	114	8	115	1.0000E-04
101	1	7	114	8	114	1.0000E-04
102	1	7	113	8	113	1.0000E-04
103	1	7	112	8	112	1.0000E-04
104	1	7	111	8	111	1.0000E-04
105	1	7	110	8	110	1.0000E-04
106	1	7	109	8	109	1.0000E-04
107	1	7	108	8	108	1.0000E-04
108	1	7	107	8	107	1.0000E-04
109	1	7	106	8	106	1.0000E-04
110	1	7	105	8	105	1.0000E-04

APPENDIX B

111	1	7	104	8	104	1.0000E-04
112	1	7	103	8	103	1.0000E-04
113	1	7	102	8	102	1.0000E-04
114	1	7	101	8	101	1.0000E-04
115	1	7	100	8	100	1.0000E-04
116	1	7	99	8	99	1.0000E-04
117	1	8	98	8	99	1.0000E-04
118	1	8	98	9	98	1.0000E-04
119	1	9	97	9	98	1.0000E-04
120	1	10	97	10	98	1.0000E-04
121	1	10	97	11	97	1.0000E-04
122	1	10	96	11	96	1.0000E-04
123	1	11	95	11	96	1.0000E-04
124	1	11	95	12	95	1.0000E-04
125	1	12	94	12	95	1.0000E-04
126	1	13	94	13	95	1.0000E-04
127	1	14	94	14	95	1.0000E-04
128	1	15	94	15	95	1.0000E-04
129	1	16	94	16	95	1.0000E-04
130	1	17	94	17	95	1.0000E-04
131	1	18	94	18	95	1.0000E-04
132	1	19	94	19	95	1.0000E-04
133	1	20	94	20	95	1.0000E-04
134	1	20	95	21	95	1.0000E-04
135	1	21	95	21	96	1.0000E-04
136	1	22	95	22	96	1.0000E-04
137	1	22	96	23	96	1.0000E-04
138	1	23	96	23	97	1.0000E-04
139	1	23	97	24	97	1.0000E-04
140	1	23	98	24	98	1.0000E-04
141	1	24	98	24	99	1.0000E-04
142	1	24	99	25	99	1.0000E-04
143	1	24	100	25	100	1.0000E-04
144	1	24	101	25	101	1.0000E-04
145	1	24	102	25	102	1.0000E-04
146	1	24	103	25	103	1.0000E-04
147	1	24	104	25	104	1.0000E-04
148	1	24	105	25	105	1.0000E-04
149	1	24	106	25	106	1.0000E-04
150	1	24	106	24	107	1.0000E-04
151	1	23	107	24	107	1.0000E-04
152	1	23	108	24	108	1.0000E-04
153	1	23	108	23	109	1.0000E-04
154	1	22	109	23	109	1.0000E-04
155	1	22	110	23	110	1.0000E-04
156	1	22	111	23	111	1.0000E-04
157	1	22	112	23	112	1.0000E-04
158	1	23	112	23	113	1.0000E-04
159	1	23	113	24	113	1.0000E-04
160	1	23	114	24	114	1.0000E-04
161	1	24	114	24	115	1.0000E-04
162	1	24	115	25	115	1.0000E-04
163	1	24	116	25	116	1.0000E-04
164	1	24	117	25	117	1.0000E-04

APPENDIX B

165	1	24	118	25	118	1.0000E-04
166	1	24	119	25	119	1.0000E-04
167	1	24	119	24	120	1.0000E-04
168	1	23	120	24	120	1.0000E-04
169	1	23	121	24	121	1.0000E-04
170	1	23	121	23	122	1.0000E-04
171	1	22	122	23	122	1.0000E-04
172	1	22	122	22	123	1.0000E-04
173	1	21	122	21	123	1.0000E-04
174	1	20	122	20	123	1.0000E-04
175	1	19	122	19	123	1.0000E-04
176	1	18	122	18	123	1.0000E-04
177	1	17	122	17	123	1.0000E-04
178	1	16	122	16	123	1.0000E-04
179	1	15	122	15	123	1.0000E-04
180	1	14	122	14	123	1.0000E-04
181	1	13	122	13	123	1.0000E-04
182	1	12	122	12	123	1.0000E-04
183	1	11	122	12	122	1.0000E-04
184	1	11	121	11	122	1.0000E-04
185	1	10	121	10	122	1.0000E-04
186	1	9	121	10	121	1.0000E-04
187	1	9	120	10	120	1.0000E-04
188	1	9	119	9	120	1.0000E-04
189	1	28	122	28	123	2.000
190	1	29	122	29	123	2.000
191	1	30	122	30	123	2.000
192	1	31	122	31	123	2.000
193	1	32	122	32	123	2.000
194	1	33	122	33	123	2.000
195	1	34	122	34	123	2.000
196	1	35	122	35	123	2.000
197	1	36	122	36	123	2.000
198	1	37	122	37	123	2.000
199	1	38	122	38	123	2.000
200	1	39	122	39	123	2.000
201	1	40	122	40	123	2.000
202	1	41	122	41	123	2.000
203	1	42	122	42	123	2.000
204	1	43	122	43	123	2.000
205	1	44	122	44	123	2.000
206	1	45	122	45	123	2.000
207	1	46	122	46	123	2.000
208	1	47	122	47	123	2.000
209	1	48	122	48	123	2.000
210	1	49	122	49	123	2.000
211	1	50	122	50	123	2.000
212	1	51	122	51	123	2.000
213	1	52	122	52	123	2.000
214	1	53	122	53	123	2.000
215	1	54	122	54	123	2.000
216	1	55	122	55	123	2.000
217	1	56	122	56	123	2.000
218	1	57	122	57	123	2.000

APPENDIX B

219	1	58	122	58	123	2.000
220	1	59	122	59	123	2.000
221	1	59	122	60	122	2.000
222	1	60	121	60	122	2.000
223	1	60	121	61	121	2.000
224	1	60	120	61	120	2.000
225	1	60	119	61	119	2.000
226	1	60	118	61	118	2.000
227	1	60	117	61	117	2.000
228	1	60	116	61	116	2.000
229	1	60	115	61	115	2.000
230	1	60	114	61	114	2.000
231	1	60	113	61	113	2.000
232	1	60	112	61	112	2.000
233	1	60	111	61	111	2.000
234	1	60	110	61	110	2.000
235	1	60	109	61	109	2.000
236	1	60	108	61	108	2.000
237	1	60	107	61	107	2.000
238	1	60	106	61	106	2.000
239	1	60	105	61	105	2.000
240	1	60	104	61	104	2.000
241	1	60	103	61	103	2.000
242	1	60	102	61	102	2.000
243	1	60	101	61	101	2.000
244	1	60	100	61	100	2.000
245	1	60	99	60	100	2.000
246	1	59	99	60	99	2.000
247	1	59	98	59	99	2.000
248	1	58	98	58	99	2.000
249	1	57	98	57	99	2.000
250	1	56	98	56	99	2.000
251	1	55	98	55	99	2.000
252	1	54	98	54	99	2.000
253	1	53	98	53	99	2.000
254	1	52	98	52	99	2.000
255	1	51	98	51	99	2.000
256	1	50	98	50	99	2.000
257	1	49	98	49	99	2.000
258	1	48	98	48	99	2.000
259	1	47	98	47	99	2.000
260	1	46	98	46	99	2.000
261	1	45	98	45	99	2.000
262	1	44	98	44	99	2.000
263	1	43	98	43	99	2.000
264	1	42	98	42	99	2.000
265	1	41	98	41	99	2.000
266	1	40	98	40	99	2.000
267	1	39	98	39	99	2.000
268	1	38	98	38	99	2.000
269	1	37	98	37	99	2.000
270	1	36	98	36	99	2.000
271	1	35	98	35	99	2.000
272	1	34	98	34	99	2.000

APPENDIX B

273	1	33	98	33	99	2.000
274	1	32	98	32	99	2.000
275	1	31	98	31	99	2.000
276	1	30	98	30	99	2.000
277	1	29	98	29	99	2.000
278	1	28	98	28	99	2.000
279	1	27	98	27	99	2.000
280	1	26	99	27	99	2.000
281	1	26	99	26	100	2.000
282	1	25	100	26	100	2.000
283	1	26	100	26	101	2.000
284	1	26	101	27	101	2.000
285	1	26	101	26	102	2.000
286	1	25	102	26	102	2.000
287	1	25	103	26	103	2.000
288	1	25	104	26	104	2.000
289	1	26	104	26	105	2.000
290	1	26	105	27	105	2.000
291	1	26	105	26	106	2.000
292	1	25	106	26	106	2.000
293	1	26	106	26	107	2.000
294	1	26	107	27	107	2.000
295	1	26	107	26	108	2.000
296	1	25	108	26	108	2.000
297	1	25	109	26	109	2.000
298	1	25	110	26	110	2.000
299	1	26	110	26	111	2.000
300	1	26	111	27	111	2.000
301	1	26	112	27	112	2.000
302	1	26	113	27	113	2.000
303	1	26	114	27	114	2.000
304	1	26	115	27	115	2.000
305	1	26	116	27	116	2.000
306	1	26	117	27	117	2.000
307	1	26	118	27	118	2.000
308	1	26	119	27	119	2.000
309	1	26	120	27	120	2.000
310	1	26	121	27	121	2.000
311	1	26	122	27	122	2.000
312	1	27	122	27	123	2.000

312 HFB BARRIERS

PCG -- CONJUGATE-GRADIENT SOLUTION PACKAGE, VERSION 7, 5/2/2005
 MAXIMUM OF 25 CALLS OF SOLUTION ROUTINE
 MAXIMUM OF 50 INTERNAL ITERATIONS PER CALL TO SOLUTION ROUTINE
 MATRIX PRECONDITIONING TYPE : 1

METHOD

SOLUTION BY THE CONJUGATE-GRADIENT

APPENDIX B

```

MAXIMUM NUMBER OF CALLS TO PCG ROUTINE =      25
MAXIMUM ITERATIONS PER CALL TO PCG =      50
MATRIX PRECONDITIONING TYPE =      1
RELAXATION FACTOR (ONLY USED WITH PRECOND. TYPE 1) =
0.10000E+01
PARAMETER OF POLYNOMIAL PRECOND. = 2 (2) OR IS CALCULATED :      0
HEAD CHANGE CRITERION FOR CLOSURE =      0.10000E-
01
RESIDUAL CHANGE CRITERION FOR CLOSURE =      0.10000E-
01
PCG HEAD AND RESIDUAL CHANGE PRINTOUT INTERVAL =      999
PRINTING FROM SOLVER IS LIMITED(1) OR SUPPRESSED (>1) =      2
STEADY-STATE DAMPING PARAMETER =
0.10000E+01
TRANSIENT DAMPING PARAMETER =
0.10000E+01

```

WARNING READING LMT PACKAGE INPUT DATA:
[STANDARD] HEADER NO LONGER SUPPORTED; [EXTENDED] HEADER USED INSTEAD.

```

***Link-MT3DMS Package v7***
OPENING LINK-MT3DMS OUTPUT FILE: GH-1.hff
ON UNIT NUMBER: 333
FILE TYPE: UNFORMATTED
HEADER OPTION: EXTENDED
***Link-MT3DMS Package v7***

```

```

1
STRESS PERIOD NO. 1, LENGTH = 1.000000
-----
--

NUMBER OF TIME STEPS = 1
MULTIPLIER FOR DELT = 1.000
INITIAL TIME STEP SIZE = 1.000000

```

SOLVING FOR HEAD

```

OUTPUT CONTROL FOR STRESS PERIOD 1 TIME STEP 1
PRINT BUDGET
SAVE HEAD FOR ALL LAYERS
SAVE BUDGET
UBDSV2 SAVING " CONSTANT HEAD" ON UNIT 40 AT TIME STEP 1, STRESS
PERIOD 1
UBDSV1 SAVING "FLOW RIGHT FACE " ON UNIT 40 AT TIME STEP 1, STRESS
PERIOD 1
UBDSV1 SAVING "FLOW FRONT FACE " ON UNIT 40 AT TIME STEP 1, STRESS
PERIOD 1
UBDSV3 SAVING " RECHARGE" ON UNIT 40 AT TIME STEP 1, STRESS
PERIOD 1

```

APPENDIX B

SAVING SATURATED THICKNESS AND FLOW TERMS ON UNIT 333 FOR MT3DMS
BY THE LINK-MT3DMS PACKAGE V7 AT TIME STEP 1, STRESS PERIOD 1

HEAD WILL BE SAVED ON UNIT 3 AT END OF TIME STEP 1, STRESS PERIOD
1
1

VOLUMETRIC BUDGET FOR ENTIRE MODEL AT END OF TIME STEP 1, STRESS
PERIOD 1

CUMULATIVE VOLUMES L**3/T	L**3	RATES FOR THIS TIME STEP
-----		-----
IN: ---		IN: ---
STORAGE =	0.0000	STORAGE =
0.0000		
CONSTANT HEAD =	29969.7676	CONSTANT HEAD =
29969.7676		
RECHARGE =	32198.0039	RECHARGE =
32198.0039		
TOTAL IN =	62167.7734	TOTAL IN =
62167.7734		
OUT: ----		OUT: ----
STORAGE =	0.0000	STORAGE =
0.0000		
CONSTANT HEAD =	62167.5742	CONSTANT HEAD =
62167.5742		
RECHARGE =	0.0000	RECHARGE =
0.0000		
TOTAL OUT =	62167.5742	TOTAL OUT =
62167.5742		
IN - OUT =	0.1992	IN - OUT =
0.1992		
PERCENT DISCREPANCY =	0.00	PERCENT DISCREPANCY =
0.00		

	TIME SUMMARY AT END OF TIME STEP	1 IN STRESS PERIOD	1
	SECONDS	HOURS	DAYS
YEARS	MINUTES		

APPENDIX B

```
-----  
-----  
      TIME STEP LENGTH  86400.      1440.0      24.000      1.0000  
2.73785E-03  
      STRESS PERIOD TIME 86400.      1440.0      24.000      1.0000  
2.73785E-03  
      TOTAL TIME 86400.      1440.0      24.000      1.0000  
2.73785E-03  
1
```

Run end date and time (yyyy/mm/dd hh:mm:ss): 2023/01/06 11:29:55
Elapsed run time: 0.230 Seconds

APPENDIX B

MODFLOW-2005
U.S. GEOLOGICAL SURVEY MODULAR FINITE-DIFFERENCE GROUND-WATER FLOW
MODEL

VERSION 1.12.00 2/3/2017

LIST FILE: GH-1-RECLAMATION_F.out
UNIT 2

OPENING "GH-1-RECLAMATION_F.hed"
FILE TYPE:DATA(BINARY) UNIT 3 STATUS:UNKNOWN
FORMAT:UNFORMATTED ACCESS:STREAM

OPENING "GH-1-RECLAMATION_F.ccf"
FILE TYPE:DATA(BINARY) UNIT 40 STATUS:UNKNOWN
FORMAT:UNFORMATTED ACCESS:STREAM

OPENING "GH-1-RECLAMATION_F.lmt"
FILE TYPE:LMT6 UNIT 4 STATUS:OLD
FORMAT:FORMATTED ACCESS:SEQUENTIAL

Obs-Sen-Pes Process Input Files

OPENING "GH-1-RECLAMATION_F.drob"
FILE TYPE:DROB UNIT 11 STATUS:OLD
FORMAT:FORMATTED ACCESS:SEQUENTIAL

Obs Process Output File(s)

OPENING "GH-1-RECLAMATION_F._os"
FILE TYPE:DATA UNIT 14 STATUS:UNKNOWN
FORMAT:FORMATTED ACCESS:SEQUENTIAL

Global Input Files

OPENING "GH-1-RECLAMATION_F.dis"
FILE TYPE:DIS UNIT 7 STATUS:OLD
FORMAT:FORMATTED ACCESS:SEQUENTIAL

Flow Process Input Files

OPENING "GH-1-RECLAMATION_F.ba6"
FILE TYPE:BAS6 UNIT 8 STATUS:OLD
FORMAT:FORMATTED ACCESS:SEQUENTIAL

OPENING "GH-1-RECLAMATION_F.lpf"
FILE TYPE:LPF UNIT 9 STATUS:OLD
FORMAT:FORMATTED ACCESS:SEQUENTIAL

OPENING "GH-1-RECLAMATION_F.oc"
FILE TYPE:OC UNIT 10 STATUS:OLD
FORMAT:FORMATTED ACCESS:SEQUENTIAL

OPENING "GH-1-RECLAMATION_F.rch"
FILE TYPE:RCH UNIT 1 STATUS:OLD

APPENDIX B

FORMAT:FORMATTED ACCESS:SEQUENTIAL

OPENING "GH-1-RECLAMATION_F.hfb"

FILE TYPE:HFB6 UNIT 12 STATUS:OLD

FORMAT:FORMATTED ACCESS:SEQUENTIAL

OPENING "GH-1-RECLAMATION_F.drn"

FILE TYPE:DRN UNIT 15 STATUS:OLD

FORMAT:FORMATTED ACCESS:SEQUENTIAL

OPENING "GH-1-RECLAMATION_F.pcg"

FILE TYPE:PCG UNIT 13 STATUS:OLD

FORMAT:FORMATTED ACCESS:SEQUENTIAL

BAS -- BASIC PACKAGE, VERSION 7, 5/2/2005 INPUT READ FROM UNIT 8

MODFLOW was compiled using mixed precision

Precision of REAL variables: 6

Precision of DOUBLE PRECISION variables: 15

DISCRETIZATION INPUT DATA READ FROM UNIT 7

MF2K DISCRETIZATION FILE

#

#

NLAY NROW NCOL NPER TIMEUNITS LENUNITS

1 LAYERS 93 ROWS 141 COLUMNS

1 STRESS PERIOD(S) IN SIMULATION

MODEL TIME UNIT IS DAYS

MODEL LENGTH UNIT IS FEET

Confining bed flag for each layer:

0

DELR

READING ON UNIT 7 WITH FORMAT: (FREE)

DELC

READING ON UNIT 7 WITH FORMAT: (FREE)

STRESS PERIOD FLAG	LENGTH	TIME STEPS	MULTIPLIER FOR DELT	SS

1	1.000000	1	1.000	SS

STEADY-STATE SIMULATION

APPENDIX B

#GMS MODFLOW Simulation
#02 January 2023
THE FREE FORMAT OPTION HAS BEEN SELECTED

BOUNDARY ARRAY FOR LAYER 1
READING DATA FROM HDF5 FILE

AQUIFER HEAD WILL BE SET TO -999.00 AT ALL NO-FLOW NODES
(IBOUND=0).

OUTPUT CONTROL IS SPECIFIED ONLY AT TIME STEPS FOR WHICH OUTPUT IS
DESIRED

COMPACT CELL-BY-CELL BUDGET FILES WILL BE WRITTEN
AUXILIARY DATA WILL BE SAVED IN CELL-BY-CELL BUDGET FILES
HEAD PRINT FORMAT CODE IS 0 DRAWDOWN PRINT FORMAT CODE IS 0
HEADS WILL BE SAVED ON UNIT 3 DRAWDOWNS WILL BE SAVED ON UNIT 0

LPF -- LAYER-PROPERTY FLOW PACKAGE, VERSION 7, 5/2/2005
INPUT READ FROM UNIT 9
CELL-BY-CELL FLOWS WILL BE SAVED ON UNIT 40
HEAD AT CELLS THAT CONVERT TO DRY= -888.00
No named parameters

LAYER FLAGS:				
LAYER	LAYTYP	LAYAVG	CHANI	LAYVKA
LAYWET				

1	0	0	-1.000E+00	1

INTERPRETATION OF LAYER FLAGS:				
LAYER TYPE	INTERBLOCK TRANSMISSIVITY	HORIZONTAL ANISOTROPY	DATA IN ARRAY VKA	
LAYER (LAYWET)	(LAYTYP)	(LAYAVG)	(CHANI)	(LAYVKA)

1	CONFINED	HARMONIC	VARIABLE	ANISOTROPY NON-

WETTABLE

WETTING CAPABILITY IS NOT ACTIVE IN ANY LAYER

DRN -- DRAIN PACKAGE, VERSION 7, 5/2/2005 INPUT READ FROM UNIT 15
#GMS_HDF5_01
No named parameters
MAXIMUM OF 91 ACTIVE DRAINS AT ONE TIME
CELL-BY-CELL FLOWS WILL BE SAVED ON UNIT 40
AUXILIARY DRAIN VARIABLE: IFACE
AUXILIARY DRAIN VARIABLE: CONDFACT
AUXILIARY DRAIN VARIABLE: CELLGRP

APPENDIX B

0 Drain parameters

RCH -- RECHARGE PACKAGE, VERSION 7, 5/2/2005 INPUT READ FROM UNIT 1
 #GMS_HDF5_01
 No named parameters
 OPTION 3 -- RECHARGE TO HIGHEST ACTIVE NODE IN EACH VERTICAL COLUMN
 CELL-BY-CELL FLOWS WILL BE SAVED ON UNIT 40

0 Recharge parameters

HFB -- HORIZONTAL-FLOW BARRIER PACKAGE, VERSION 7, 5/2/2005.
 INPUT READ FROM UNIT 12
 0 PARAMETERS DEFINE A MAXIMUM OF 0 HORIZONTAL FLOW BARRIERS
 539 HORIZONTAL FLOW BARRIERS NOT DEFINED BY PARAMETERS

0 HFB parameters

539 BARRIERS NOT DEFINED BY PARAMETERS

BARRIER	LAYER	IROW1	ICOL1	IROW2	ICOL2	HYDCHR
1	1	15	91	15	92	1.0000E-04
2	1	14	91	15	91	1.0000E-04
3	1	14	90	15	90	1.0000E-04
4	1	14	89	15	89	1.0000E-04
5	1	14	88	15	88	1.0000E-04
6	1	14	87	15	87	1.0000E-04
7	1	14	86	15	86	1.0000E-04
8	1	14	85	15	85	1.0000E-04
9	1	14	84	15	84	1.0000E-04
10	1	14	83	15	83	1.0000E-04
11	1	14	82	15	82	1.0000E-04
12	1	14	81	15	81	1.0000E-04
13	1	14	80	15	80	1.0000E-04
14	1	15	79	15	80	1.0000E-04
15	1	15	79	16	79	1.0000E-04
16	1	16	78	16	79	1.0000E-04
17	1	17	78	17	79	1.0000E-04
18	1	17	78	18	78	1.0000E-04
19	1	18	77	18	78	1.0000E-04
20	1	18	77	19	77	1.0000E-04
21	1	19	76	19	77	1.0000E-04
22	1	19	76	20	76	1.0000E-04
23	1	20	75	20	76	1.0000E-04
24	1	20	75	21	75	1.0000E-04
25	1	20	74	21	74	1.0000E-04
26	1	20	73	21	73	1.0000E-04
27	1	21	72	21	73	1.0000E-04
28	1	21	72	22	72	1.0000E-04
29	1	22	71	22	72	1.0000E-04

APPENDIX B

30	1	23	71	23	72	1.0000E-04
31	1	24	71	24	72	1.0000E-04
32	1	24	72	25	72	1.0000E-04
33	1	25	72	25	73	1.0000E-04
34	1	26	72	26	73	1.0000E-04
35	1	27	72	27	73	1.0000E-04
36	1	28	72	28	73	1.0000E-04
37	1	29	72	29	73	1.0000E-04
38	1	30	72	30	73	1.0000E-04
39	1	30	72	31	72	1.0000E-04
40	1	31	71	31	72	1.0000E-04
41	1	32	71	32	72	1.0000E-04
42	1	33	71	33	72	1.0000E-04
43	1	34	71	34	72	1.0000E-04
44	1	35	71	35	72	1.0000E-04
45	1	36	71	36	72	1.0000E-04
46	1	36	72	37	72	1.0000E-04
47	1	36	73	37	73	1.0000E-04
48	1	36	74	37	74	1.0000E-04
49	1	36	75	37	75	1.0000E-04
50	1	36	76	37	76	1.0000E-04
51	1	36	77	37	77	1.0000E-04
52	1	36	78	37	78	1.0000E-04
53	1	36	79	37	79	1.0000E-04
54	1	36	80	37	80	1.0000E-04
55	1	36	81	37	81	1.0000E-04
56	1	36	82	37	82	1.0000E-04
57	1	36	83	37	83	1.0000E-04
58	1	36	84	37	84	1.0000E-04
59	1	36	85	37	85	1.0000E-04
60	1	36	86	37	86	1.0000E-04
61	1	36	87	37	87	1.0000E-04
62	1	36	88	37	88	1.0000E-04
63	1	36	89	37	89	1.0000E-04
64	1	36	90	37	90	1.0000E-04
65	1	36	91	37	91	1.0000E-04
66	1	36	92	37	92	1.0000E-04
67	1	36	93	37	93	1.0000E-04
68	1	36	94	37	94	1.0000E-04
69	1	36	95	37	95	1.0000E-04
70	1	36	95	36	96	1.0000E-04
71	1	35	95	35	96	1.0000E-04
72	1	34	95	34	96	1.0000E-04
73	1	33	95	33	96	1.0000E-04
74	1	32	95	32	96	1.0000E-04
75	1	31	95	31	96	1.0000E-04
76	1	30	95	30	96	1.0000E-04
77	1	29	95	30	95	1.0000E-04
78	1	29	94	29	95	1.0000E-04
79	1	28	94	28	95	1.0000E-04
80	1	27	94	28	94	1.0000E-04
81	1	27	93	27	94	1.0000E-04
82	1	26	93	26	94	1.0000E-04
83	1	25	93	25	94	1.0000E-04

APPENDIX B

84	1	24	93	24	94	1.0000E-04
85	1	23	93	24	93	1.0000E-04
86	1	23	92	23	93	1.0000E-04
87	1	22	92	22	93	1.0000E-04
88	1	21	92	21	93	1.0000E-04
89	1	20	92	20	93	1.0000E-04
90	1	19	92	20	92	1.0000E-04
91	1	19	91	19	92	1.0000E-04
92	1	18	91	18	92	1.0000E-04
93	1	17	91	17	92	1.0000E-04
94	1	16	91	16	92	1.0000E-04
95	1	8	119	9	119	1.0000E-04
96	1	8	118	9	118	1.0000E-04
97	1	8	117	9	117	1.0000E-04
98	1	8	116	9	116	1.0000E-04
99	1	8	115	9	115	1.0000E-04
100	1	8	114	8	115	1.0000E-04
101	1	7	114	8	114	1.0000E-04
102	1	7	113	8	113	1.0000E-04
103	1	7	112	8	112	1.0000E-04
104	1	7	111	8	111	1.0000E-04
105	1	7	110	8	110	1.0000E-04
106	1	7	109	8	109	1.0000E-04
107	1	7	108	8	108	1.0000E-04
108	1	7	107	8	107	1.0000E-04
109	1	7	106	8	106	1.0000E-04
110	1	7	105	8	105	1.0000E-04
111	1	7	104	8	104	1.0000E-04
112	1	7	103	8	103	1.0000E-04
113	1	7	102	8	102	1.0000E-04
114	1	7	101	8	101	1.0000E-04
115	1	7	100	8	100	1.0000E-04
116	1	7	99	8	99	1.0000E-04
117	1	8	98	8	99	1.0000E-04
118	1	8	98	9	98	1.0000E-04
119	1	9	97	9	98	1.0000E-04
120	1	10	97	10	98	1.0000E-04
121	1	10	97	11	97	1.0000E-04
122	1	10	96	11	96	1.0000E-04
123	1	11	95	11	96	1.0000E-04
124	1	11	95	12	95	1.0000E-04
125	1	12	94	12	95	1.0000E-04
126	1	13	94	13	95	1.0000E-04
127	1	14	94	14	95	1.0000E-04
128	1	15	94	15	95	1.0000E-04
129	1	16	94	16	95	1.0000E-04
130	1	17	94	17	95	1.0000E-04
131	1	18	94	18	95	1.0000E-04
132	1	19	94	19	95	1.0000E-04
133	1	20	94	20	95	1.0000E-04
134	1	20	95	21	95	1.0000E-04
135	1	21	95	21	96	1.0000E-04
136	1	22	95	22	96	1.0000E-04
137	1	22	96	23	96	1.0000E-04

APPENDIX B

138	1	23	96	23	97	1.0000E-04
139	1	23	97	24	97	1.0000E-04
140	1	23	98	24	98	1.0000E-04
141	1	24	98	24	99	1.0000E-04
142	1	24	99	25	99	1.0000E-04
143	1	24	100	25	100	1.0000E-04
144	1	24	101	25	101	1.0000E-04
145	1	24	102	25	102	1.0000E-04
146	1	24	103	25	103	1.0000E-04
147	1	24	104	25	104	1.0000E-04
148	1	24	105	25	105	1.0000E-04
149	1	24	106	25	106	1.0000E-04
150	1	24	106	24	107	1.0000E-04
151	1	23	107	24	107	1.0000E-04
152	1	23	108	24	108	1.0000E-04
153	1	23	108	23	109	1.0000E-04
154	1	22	109	23	109	1.0000E-04
155	1	22	110	23	110	1.0000E-04
156	1	22	111	23	111	1.0000E-04
157	1	22	112	23	112	1.0000E-04
158	1	23	112	23	113	1.0000E-04
159	1	23	113	24	113	1.0000E-04
160	1	23	114	24	114	1.0000E-04
161	1	24	114	24	115	1.0000E-04
162	1	24	115	25	115	1.0000E-04
163	1	24	116	25	116	1.0000E-04
164	1	24	117	25	117	1.0000E-04
165	1	24	118	25	118	1.0000E-04
166	1	24	119	25	119	1.0000E-04
167	1	24	119	24	120	1.0000E-04
168	1	23	120	24	120	1.0000E-04
169	1	23	121	24	121	1.0000E-04
170	1	23	121	23	122	1.0000E-04
171	1	22	122	23	122	1.0000E-04
172	1	22	122	22	123	1.0000E-04
173	1	21	122	21	123	1.0000E-04
174	1	20	122	20	123	1.0000E-04
175	1	19	122	19	123	1.0000E-04
176	1	18	122	18	123	1.0000E-04
177	1	17	122	17	123	1.0000E-04
178	1	16	122	16	123	1.0000E-04
179	1	15	122	15	123	1.0000E-04
180	1	14	122	14	123	1.0000E-04
181	1	13	122	13	123	1.0000E-04
182	1	12	122	12	123	1.0000E-04
183	1	11	122	12	122	1.0000E-04
184	1	11	121	11	122	1.0000E-04
185	1	10	121	10	122	1.0000E-04
186	1	9	121	10	121	1.0000E-04
187	1	9	120	10	120	1.0000E-04
188	1	9	119	9	120	1.0000E-04
189	1	27	122	28	122	1.0000E-04
190	1	28	122	28	123	1.0000E-04
191	1	29	122	29	123	1.0000E-04

APPENDIX B

192	1	30	122	30	123	1.0000E-04
193	1	31	122	31	123	1.0000E-04
194	1	32	122	32	123	1.0000E-04
195	1	33	122	33	123	1.0000E-04
196	1	34	122	34	123	1.0000E-04
197	1	35	122	35	123	1.0000E-04
198	1	36	122	36	123	1.0000E-04
199	1	37	122	37	123	1.0000E-04
200	1	38	122	38	123	1.0000E-04
201	1	39	122	39	123	1.0000E-04
202	1	40	122	40	123	1.0000E-04
203	1	41	122	41	123	1.0000E-04
204	1	42	122	42	123	1.0000E-04
205	1	43	122	43	123	1.0000E-04
206	1	44	122	44	123	1.0000E-04
207	1	45	122	45	123	1.0000E-04
208	1	46	122	46	123	1.0000E-04
209	1	47	122	47	123	1.0000E-04
210	1	48	122	48	123	1.0000E-04
211	1	49	122	49	123	1.0000E-04
212	1	50	122	50	123	1.0000E-04
213	1	51	122	51	123	1.0000E-04
214	1	52	122	52	123	1.0000E-04
215	1	53	122	53	123	1.0000E-04
216	1	54	122	54	123	1.0000E-04
217	1	55	122	55	123	1.0000E-04
218	1	56	122	56	123	1.0000E-04
219	1	57	122	57	123	1.0000E-04
220	1	58	122	58	123	1.0000E-04
221	1	59	122	59	123	1.0000E-04
222	1	59	122	60	122	1.0000E-04
223	1	60	121	60	122	1.0000E-04
224	1	60	121	61	121	1.0000E-04
225	1	60	120	61	120	1.0000E-04
226	1	60	119	61	119	1.0000E-04
227	1	60	118	61	118	1.0000E-04
228	1	60	117	61	117	1.0000E-04
229	1	60	116	61	116	1.0000E-04
230	1	60	115	61	115	1.0000E-04
231	1	60	114	61	114	1.0000E-04
232	1	60	113	61	113	1.0000E-04
233	1	60	112	61	112	1.0000E-04
234	1	60	111	61	111	1.0000E-04
235	1	60	110	61	110	1.0000E-04
236	1	60	109	61	109	1.0000E-04
237	1	60	108	61	108	1.0000E-04
238	1	60	107	61	107	1.0000E-04
239	1	60	106	61	106	1.0000E-04
240	1	60	105	61	105	1.0000E-04
241	1	60	104	61	104	1.0000E-04
242	1	60	103	61	103	1.0000E-04
243	1	60	102	61	102	1.0000E-04
244	1	60	101	61	101	1.0000E-04
245	1	60	100	61	100	1.0000E-04

APPENDIX B

246	1	60	99	60	100	1.0000E-04
247	1	59	99	60	99	1.0000E-04
248	1	59	98	59	99	1.0000E-04
249	1	58	98	58	99	1.0000E-04
250	1	57	98	57	99	1.0000E-04
251	1	56	98	56	99	1.0000E-04
252	1	55	98	55	99	1.0000E-04
253	1	54	98	54	99	1.0000E-04
254	1	53	98	53	99	1.0000E-04
255	1	52	98	52	99	1.0000E-04
256	1	51	98	51	99	1.0000E-04
257	1	50	98	50	99	1.0000E-04
258	1	49	98	49	99	1.0000E-04
259	1	48	98	48	99	1.0000E-04
260	1	47	98	47	99	1.0000E-04
261	1	46	98	46	99	1.0000E-04
262	1	45	98	45	99	1.0000E-04
263	1	44	98	44	99	1.0000E-04
264	1	43	98	43	99	1.0000E-04
265	1	42	98	42	99	1.0000E-04
266	1	41	98	41	99	1.0000E-04
267	1	40	98	40	99	1.0000E-04
268	1	39	98	39	99	1.0000E-04
269	1	38	98	38	99	1.0000E-04
270	1	37	98	37	99	1.0000E-04
271	1	36	98	36	99	1.0000E-04
272	1	35	98	35	99	1.0000E-04
273	1	34	98	34	99	1.0000E-04
274	1	33	98	33	99	1.0000E-04
275	1	32	98	32	99	1.0000E-04
276	1	31	98	31	99	1.0000E-04
277	1	30	98	30	99	1.0000E-04
278	1	29	98	29	99	1.0000E-04
279	1	28	98	28	99	1.0000E-04
280	1	27	98	27	99	1.0000E-04
281	1	26	99	27	99	1.0000E-04
282	1	26	99	26	100	1.0000E-04
283	1	25	100	26	100	1.0000E-04
284	1	26	100	26	101	1.0000E-04
285	1	26	101	27	101	1.0000E-04
286	1	26	101	26	102	1.0000E-04
287	1	25	102	26	102	1.0000E-04
288	1	25	103	26	103	1.0000E-04
289	1	25	104	26	104	1.0000E-04
290	1	26	104	26	105	1.0000E-04
291	1	26	105	27	105	1.0000E-04
292	1	26	105	26	106	1.0000E-04
293	1	25	106	26	106	1.0000E-04
294	1	26	106	26	107	1.0000E-04
295	1	26	107	27	107	1.0000E-04
296	1	26	107	26	108	1.0000E-04
297	1	25	108	26	108	1.0000E-04
298	1	25	109	26	109	1.0000E-04
299	1	25	110	26	110	1.0000E-04

APPENDIX B

300	1	26	110	26	111	1.0000E-04
301	1	26	111	27	111	1.0000E-04
302	1	26	112	27	112	1.0000E-04
303	1	26	113	27	113	1.0000E-04
304	1	26	114	27	114	1.0000E-04
305	1	26	115	27	115	1.0000E-04
306	1	26	116	27	116	1.0000E-04
307	1	26	117	27	117	1.0000E-04
308	1	26	118	27	118	1.0000E-04
309	1	26	119	27	119	1.0000E-04
310	1	26	120	27	120	1.0000E-04
311	1	26	121	27	121	1.0000E-04
312	1	26	122	27	122	1.0000E-04
313	1	27	122	27	123	1.0000E-04
314	1	39	95	39	96	1.0000E-03
315	1	38	95	39	95	1.0000E-03
316	1	38	94	39	94	1.0000E-03
317	1	38	93	39	93	1.0000E-03
318	1	38	92	39	92	1.0000E-03
319	1	38	91	39	91	1.0000E-03
320	1	38	90	39	90	1.0000E-03
321	1	38	89	39	89	1.0000E-03
322	1	38	88	39	88	1.0000E-03
323	1	38	87	39	87	1.0000E-03
324	1	38	86	39	86	1.0000E-03
325	1	38	85	39	85	1.0000E-03
326	1	38	84	39	84	1.0000E-03
327	1	38	83	39	83	1.0000E-03
328	1	38	82	39	82	1.0000E-03
329	1	38	81	39	81	1.0000E-03
330	1	38	80	39	80	1.0000E-03
331	1	38	79	39	79	1.0000E-03
332	1	38	78	39	78	1.0000E-03
333	1	38	77	39	77	1.0000E-03
334	1	38	76	39	76	1.0000E-03
335	1	38	75	39	75	1.0000E-03
336	1	38	74	39	74	1.0000E-03
337	1	39	73	39	74	1.0000E-03
338	1	39	73	40	73	1.0000E-03
339	1	39	72	40	72	1.0000E-03
340	1	40	71	40	72	1.0000E-03
341	1	41	71	41	72	1.0000E-03
342	1	42	71	42	72	1.0000E-03
343	1	43	71	43	72	1.0000E-03
344	1	44	71	44	72	1.0000E-03
345	1	44	71	45	71	1.0000E-03
346	1	45	70	45	71	1.0000E-03
347	1	46	70	46	71	1.0000E-03
348	1	47	70	47	71	1.0000E-03
349	1	48	70	48	71	1.0000E-03
350	1	49	70	49	71	1.0000E-03
351	1	49	71	50	71	1.0000E-03
352	1	50	71	50	72	1.0000E-03
353	1	51	71	51	72	1.0000E-03

APPENDIX B

354	1	52	71	52	72	1.0000E-03
355	1	53	71	53	72	1.0000E-03
356	1	54	71	54	72	1.0000E-03
357	1	55	71	55	72	1.0000E-03
358	1	56	71	56	72	1.0000E-03
359	1	56	72	57	72	1.0000E-03
360	1	57	72	57	73	1.0000E-03
361	1	57	73	58	73	1.0000E-03
362	1	57	74	58	74	1.0000E-03
363	1	58	74	58	75	1.0000E-03
364	1	58	75	59	75	1.0000E-03
365	1	59	75	59	76	1.0000E-03
366	1	59	76	60	76	1.0000E-03
367	1	60	76	60	77	1.0000E-03
368	1	60	77	61	77	1.0000E-03
369	1	61	77	61	78	1.0000E-03
370	1	61	78	62	78	1.0000E-03
371	1	61	79	62	79	1.0000E-03
372	1	62	79	62	80	1.0000E-03
373	1	62	80	63	80	1.0000E-03
374	1	62	81	63	81	1.0000E-03
375	1	62	82	63	82	1.0000E-03
376	1	62	83	63	83	1.0000E-03
377	1	62	84	63	84	1.0000E-03
378	1	62	85	63	85	1.0000E-03
379	1	62	86	63	86	1.0000E-03
380	1	62	87	63	87	1.0000E-03
381	1	62	88	63	88	1.0000E-03
382	1	62	89	63	89	1.0000E-03
383	1	62	90	63	90	1.0000E-03
384	1	62	91	63	91	1.0000E-03
385	1	62	92	63	92	1.0000E-03
386	1	62	93	63	93	1.0000E-03
387	1	62	94	63	94	1.0000E-03
388	1	62	95	63	95	1.0000E-03
389	1	62	95	62	96	1.0000E-03
390	1	61	96	62	96	1.0000E-03
391	1	61	96	61	97	1.0000E-03
392	1	60	96	60	97	1.0000E-03
393	1	59	96	59	97	1.0000E-03
394	1	58	96	58	97	1.0000E-03
395	1	57	96	57	97	1.0000E-03
396	1	56	96	56	97	1.0000E-03
397	1	55	96	55	97	1.0000E-03
398	1	54	96	54	97	1.0000E-03
399	1	53	96	53	97	1.0000E-03
400	1	52	96	52	97	1.0000E-03
401	1	51	96	51	97	1.0000E-03
402	1	50	96	50	97	1.0000E-03
403	1	49	97	50	97	1.0000E-03
404	1	49	97	49	98	1.0000E-03
405	1	48	97	48	98	1.0000E-03
406	1	47	97	47	98	1.0000E-03
407	1	46	97	46	98	1.0000E-03

APPENDIX B

408	1	45	97	45	98	1.0000E-03
409	1	44	97	44	98	1.0000E-03
410	1	43	97	43	98	1.0000E-03
411	1	42	97	42	98	1.0000E-03
412	1	41	97	42	97	1.0000E-03
413	1	41	96	41	97	1.0000E-03
414	1	40	96	40	97	1.0000E-03
415	1	39	96	40	96	1.0000E-03
416	1	45	67	45	68	1.0000E-03
417	1	44	67	44	68	1.0000E-03
418	1	43	67	43	68	1.0000E-03
419	1	42	67	42	68	1.0000E-03
420	1	41	67	42	67	1.0000E-03
421	1	41	66	41	67	1.0000E-03
422	1	40	66	41	66	1.0000E-03
423	1	40	65	41	65	1.0000E-03
424	1	40	64	41	64	1.0000E-03
425	1	40	63	41	63	1.0000E-03
426	1	40	62	41	62	1.0000E-03
427	1	40	61	41	61	1.0000E-03
428	1	40	60	41	60	1.0000E-03
429	1	40	59	41	59	1.0000E-03
430	1	40	58	41	58	1.0000E-03
431	1	40	57	41	57	1.0000E-03
432	1	40	56	41	56	1.0000E-03
433	1	40	55	41	55	1.0000E-03
434	1	40	54	41	54	1.0000E-03
435	1	40	53	41	53	1.0000E-03
436	1	40	52	41	52	1.0000E-03
437	1	40	51	41	51	1.0000E-03
438	1	40	50	41	50	1.0000E-03
439	1	40	49	41	49	1.0000E-03
440	1	40	48	41	48	1.0000E-03
441	1	40	47	41	47	1.0000E-03
442	1	40	46	41	46	1.0000E-03
443	1	40	45	41	45	1.0000E-03
444	1	40	44	41	44	1.0000E-03
445	1	40	43	41	43	1.0000E-03
446	1	40	42	41	42	1.0000E-03
447	1	40	41	41	41	1.0000E-03
448	1	40	40	41	40	1.0000E-03
449	1	40	39	41	39	1.0000E-03
450	1	40	38	41	38	1.0000E-03
451	1	40	37	41	37	1.0000E-03
452	1	40	36	41	36	1.0000E-03
453	1	40	35	41	35	1.0000E-03
454	1	40	34	41	34	1.0000E-03
455	1	40	33	41	33	1.0000E-03
456	1	40	32	41	32	1.0000E-03
457	1	40	31	41	31	1.0000E-03
458	1	40	30	41	30	1.0000E-03
459	1	40	29	41	29	1.0000E-03
460	1	40	28	41	28	1.0000E-03
461	1	41	27	41	28	1.0000E-03

APPENDIX B

462	1	42	27	42	28	1.0000E-03
463	1	42	27	43	27	1.0000E-03
464	1	43	26	43	27	1.0000E-03
465	1	44	26	44	27	1.0000E-03
466	1	45	26	45	27	1.0000E-03
467	1	46	26	46	27	1.0000E-03
468	1	47	26	47	27	1.0000E-03
469	1	48	26	48	27	1.0000E-03
470	1	49	26	49	27	1.0000E-03
471	1	50	26	50	27	1.0000E-03
472	1	51	26	51	27	1.0000E-03
473	1	51	27	52	27	1.0000E-03
474	1	52	27	52	28	1.0000E-03
475	1	52	28	53	28	1.0000E-03
476	1	53	28	53	29	1.0000E-03
477	1	53	29	54	29	1.0000E-03
478	1	53	30	54	30	1.0000E-03
479	1	54	30	54	31	1.0000E-03
480	1	54	31	55	31	1.0000E-03
481	1	54	32	55	32	1.0000E-03
482	1	54	33	55	33	1.0000E-03
483	1	55	33	55	34	1.0000E-03
484	1	55	34	56	34	1.0000E-03
485	1	55	35	56	35	1.0000E-03
486	1	55	35	55	36	1.0000E-03
487	1	54	36	55	36	1.0000E-03
488	1	55	36	55	37	1.0000E-03
489	1	55	37	56	37	1.0000E-03
490	1	55	38	56	38	1.0000E-03
491	1	55	39	56	39	1.0000E-03
492	1	55	40	56	40	1.0000E-03
493	1	55	41	56	41	1.0000E-03
494	1	55	42	56	42	1.0000E-03
495	1	56	42	56	43	1.0000E-03
496	1	56	43	57	43	1.0000E-03
497	1	56	44	57	44	1.0000E-03
498	1	57	44	57	45	1.0000E-03
499	1	57	45	58	45	1.0000E-03
500	1	57	46	58	46	1.0000E-03
501	1	58	46	58	47	1.0000E-03
502	1	58	47	59	47	1.0000E-03
503	1	58	48	59	48	1.0000E-03
504	1	59	48	59	49	1.0000E-03
505	1	59	49	60	49	1.0000E-03
506	1	59	50	60	50	1.0000E-03
507	1	59	51	60	51	1.0000E-03
508	1	59	52	60	52	1.0000E-03
509	1	59	53	60	53	1.0000E-03
510	1	59	54	60	54	1.0000E-03
511	1	59	55	60	55	1.0000E-03
512	1	59	55	59	56	1.0000E-03
513	1	58	56	59	56	1.0000E-03
514	1	58	57	59	57	1.0000E-03
515	1	58	58	59	58	1.0000E-03

APPENDIX B

516	1	58	59	59	59	1.0000E-03
517	1	58	59	58	60	1.0000E-03
518	1	57	60	58	60	1.0000E-03
519	1	57	61	58	61	1.0000E-03
520	1	57	62	58	62	1.0000E-03
521	1	57	62	57	63	1.0000E-03
522	1	56	63	57	63	1.0000E-03
523	1	56	64	57	64	1.0000E-03
524	1	56	65	57	65	1.0000E-03
525	1	56	66	57	66	1.0000E-03
526	1	56	66	56	67	1.0000E-03
527	1	55	67	56	67	1.0000E-03
528	1	55	67	55	68	1.0000E-03
529	1	54	67	54	68	1.0000E-03
530	1	53	67	53	68	1.0000E-03
531	1	52	67	53	67	1.0000E-03
532	1	52	66	52	67	1.0000E-03
533	1	51	67	52	67	1.0000E-03
534	1	51	67	51	68	1.0000E-03
535	1	50	67	50	68	1.0000E-03
536	1	49	67	49	68	1.0000E-03
537	1	48	67	48	68	1.0000E-03
538	1	47	67	47	68	1.0000E-03
539	1	46	67	46	68	1.0000E-03

539 HFB BARRIERS

PCG -- CONJUGATE-GRADIENT SOLUTION PACKAGE, VERSION 7, 5/2/2005
 MAXIMUM OF 25 CALLS OF SOLUTION ROUTINE
 MAXIMUM OF 50 INTERNAL ITERATIONS PER CALL TO SOLUTION ROUTINE
 MATRIX PRECONDITIONING TYPE : 1

SOLUTION BY THE CONJUGATE-GRADIENT

METHOD -----

	MAXIMUM NUMBER OF CALLS TO PCG ROUTINE =	25
	MAXIMUM ITERATIONS PER CALL TO PCG =	50
	MATRIX PRECONDITIONING TYPE =	1
	RELAXATION FACTOR (ONLY USED WITH PRECOND. TYPE 1) =	
0.10000E+01	PARAMETER OF POLYNOMIAL PRECOND. = 2 (2) OR IS CALCULATED :	0
	HEAD CHANGE CRITERION FOR CLOSURE =	0.10000E-
01		
	RESIDUAL CHANGE CRITERION FOR CLOSURE =	0.10000E-
01		
	PCG HEAD AND RESIDUAL CHANGE PRINTOUT INTERVAL =	999
	PRINTING FROM SOLVER IS LIMITED(1) OR SUPPRESSED (>1) =	2
	STEADY-STATE DAMPING PARAMETER =	
0.10000E+01		
	TRANSIENT DAMPING PARAMETER =	
0.10000E+01		

APPENDIX B

WARNING READING LMT PACKAGE INPUT DATA:
[STANDARD] HEADER NO LONGER SUPPORTED; [EXTENDED] HEADER USED INSTEAD.

```
***Link-MT3DMS Package v7***
OPENING LINK-MT3DMS OUTPUT FILE: GH-1-
RECLAMATION_F.hff
ON UNIT NUMBER: 333
FILE TYPE: UNFORMATTED
HEADER OPTION: EXTENDED
***Link-MT3DMS Package v7***
```

```
OBS2DRN7 -- OBSERVATION PROCESS (DRAIN FLOW OBSERVATIONS)
VERSION 2, 02/28/2006
INPUT READ FROM UNIT 11
# CoverageGUID ObjectType ID X Y Time OBNAME
#GMSCOMMENT 3a14d79a-9bfa-4839-b4a9-7790357570f1 ARC 1 3107314.1577847
1258052.1085483 1.0 no_drnf0
#GMSCOMMENT 3a14d79a-9bfa-4839-b4a9-7790357570f1 ARC 2 3110190.4
1257950.7 1.0 no_drnf1
#GMSCOMMENT 3a14d79a-9bfa-4839-b4a9-7790357570f1 ARC 3 3109356.7354219
1257795.1494179 1.0 no_drnf2
```

```
NUMBER OF FLOW-OBSERVATION DRAIN-CELL GROUPS.....: 3
NUMBER OF CELLS IN DRAIN-CELL GROUPS.....: 92
NUMBER OF DRAIN-CELL FLOWS.....: 3
DRAIN OBSERVATIONS WILL BE SAVED ON UNIT.....: 14
```

```
OBSERVED DRAIN-CELL FLOW DATA
-- TIME OFFSETS ARE MULTIPLIED BY: 1.0000
```

```
GROUP NUMBER: 1 BOUNDARY TYPE: DRN NUMBER OF CELLS IN GROUP:
51
NUMBER OF FLOW OBSERVATIONS: 1
```

OBS#	OBSERVATION NAME	REFER. STRESS PERIOD	TIME OFFSET	OBSERVED DRAIN FLOW GAIN (-) OR LOSS (+)
1	no_drnf0	1	0.000	1.000

Observation within a steady-state time step has been moved to the end of the time step.

LAYER	ROW	COLUMN	FACTOR
1.	57.	67.	1.00
1.	57.	66.	1.00
1.	57.	65.	1.00
1.	57.	64.	1.00
1.	57.	63.	1.00
1.	58.	63.	1.00
1.	58.	62.	1.00
1.	58.	61.	1.00

APPENDIX B

1.	58.	60.	1.00
1.	59.	60.	1.00
1.	59.	59.	1.00
1.	59.	58.	1.00
1.	59.	57.	1.00
1.	59.	56.	1.00
1.	60.	56.	1.00
1.	60.	55.	1.00
1.	60.	54.	1.00
1.	60.	53.	1.00
1.	60.	52.	1.00
1.	60.	51.	1.00
1.	60.	50.	1.00
1.	60.	49.	1.00
1.	60.	48.	1.00
1.	59.	48.	1.00
1.	59.	47.	1.00
1.	59.	46.	1.00
1.	58.	46.	1.00
1.	58.	45.	1.00
1.	58.	44.	1.00
1.	57.	44.	1.00
1.	57.	43.	1.00
1.	57.	42.	1.00
1.	56.	42.	1.00
1.	56.	41.	1.00
1.	56.	40.	1.00
1.	56.	39.	1.00
1.	56.	38.	1.00
1.	56.	37.	1.00
1.	56.	36.	1.00
1.	56.	35.	1.00
1.	56.	34.	1.00
1.	56.	33.	1.00
1.	55.	33.	1.00
1.	55.	32.	1.00
1.	55.	31.	1.00
1.	55.	30.	1.00
1.	54.	30.	1.00
1.	54.	29.	1.00
1.	54.	28.	1.00
1.	53.	28.	1.00
1.	53.	27.	1.00

14 GROUP NUMBER: 2 BOUNDARY TYPE: DRN NUMBER OF CELLS IN GROUP:

 NUMBER OF FLOW OBSERVATIONS: 1

OBS#	OBSERVATION NAME	REFER. STRESS PERIOD	TIME OFFSET	OBSERVED DRAIN FLOW GAIN (-) OR LOSS (+)
2	no_drnf1	1	0.000	1.000

APPENDIX B

Observation within a steady-state time step has been moved to the end of the time step.

LAYER	ROW	COLUMN	FACTOR
1.	61.	110.	1.00
1.	61.	109.	1.00
1.	61.	108.	1.00
1.	61.	107.	1.00
1.	61.	106.	1.00
1.	61.	105.	1.00
1.	61.	104.	1.00
1.	61.	103.	1.00
1.	61.	102.	1.00
1.	61.	101.	1.00
1.	61.	100.	1.00
1.	61.	99.	1.00
1.	61.	98.	1.00
1.	61.	97.	1.00

GROUP NUMBER: 3 BOUNDARY TYPE: DRN NUMBER OF CELLS IN GROUP:
 27 NUMBER OF FLOW OBSERVATIONS: 1

OBS#	OBSERVATION NAME	REFER. STRESS PERIOD	TIME OFFSET	OBSERVED DRAIN FLOW GAIN (-) OR LOSS (+)
3	no_drnf2	1	0.000	1.000

Observation within a steady-state time step has been moved to the end of the time step.

LAYER	ROW	COLUMN	FACTOR
1.	61.	97.	0.00
1.	61.	97.	1.00
1.	62.	97.	1.00
1.	63.	97.	1.00
1.	64.	97.	1.00
1.	64.	96.	1.00
1.	64.	95.	1.00
1.	64.	94.	1.00
1.	64.	93.	1.00
1.	64.	92.	1.00
1.	64.	91.	1.00
1.	64.	90.	1.00
1.	64.	89.	1.00
1.	64.	88.	1.00
1.	64.	87.	1.00
1.	64.	86.	1.00
1.	64.	85.	1.00
1.	64.	84.	1.00
1.	64.	83.	1.00
1.	64.	82.	1.00
1.	64.	81.	1.00
1.	64.	80.	1.00

APPENDIX B

1.	64.	79.	1.00
1.	64.	78.	1.00
1.	63.	78.	1.00
1.	63.	77.	1.00
1.	62.	77.	1.00

1

STRESS PERIOD NO. 1, LENGTH = 1.000000

--

NUMBER OF TIME STEPS = 1

MULTIPLIER FOR DELT = 1.000

INITIAL TIME STEP SIZE = 1.000000

DRAIN NO. CONDFACT	LAYER	ROW CELLGRP	COL	DRAIN EL.	CONDUCTANCE	IFACE

1	1	57	67	5056.	0.1104E+05	6.000
36.80		1.000				
2	1	57	66	5056.	0.1497E+05	6.000
49.89		1.000				
3	1	57	65	5056.	0.1495E+05	6.000
49.83		1.000				
4	1	57	64	5056.	0.1494E+05	6.000
49.81		1.000				
5	1	57	63	5056.	0.1556E+05	6.000
51.87		1.000				
6	1	58	63	5057.	0.1565E+05	6.000
52.15		1.000				
7	1	58	62	5057.	0.1495E+05	6.000
49.83		1.000				
8	1	58	61	5057.	0.1495E+05	6.000
49.83		1.000				
9	1	58	60	5057.	0.1518E+05	6.000
50.59		1.000				
10	1	59	60	5057.	0.1491E+05	6.000
49.70		1.000				
11	1	59	59	5057.	0.1498E+05	6.000
49.94		1.000				
12	1	59	58	5057.	0.1496E+05	6.000
49.85		1.000				
13	1	59	57	5057.	0.1495E+05	6.000
49.83		1.000				
14	1	59	56	5057.	0.1697E+05	6.000
56.56		1.000				
15	1	60	56	5057.	0.1376E+05	6.000
45.88		1.000				
16	1	60	55	5058.	0.1494E+05	6.000
49.80		1.000				
17	1	60	54	5058.	0.1497E+05	6.000
49.90		1.000				

APPENDIX B

18	1	60	53	5058.	0.1495E+05	6.000
49.84		1.000				
19	1	60	52	5058.	0.1493E+05	6.000
49.77		1.000				
20	1	60	51	5058.	0.1493E+05	6.000
49.77		1.000				
21	1	60	50	5058.	0.1494E+05	6.000
49.80		1.000				
22	1	60	49	5058.	0.1494E+05	6.000
49.79		1.000				
23	1	60	48	5058.	0.1485E+05	6.000
49.51		1.000				
24	1	59	48	5058.	0.1440E+05	6.000
47.99		1.000				
25	1	59	47	5058.	0.1494E+05	6.000
49.79		1.000				
26	1	59	46	5059.	0.1546E+05	6.000
51.54		1.000				
27	1	58	46	5059.	0.1511E+05	6.000
50.36		1.000				
28	1	58	45	5059.	0.1501E+05	6.000
50.05		1.000				
29	1	58	44	5059.	0.1722E+05	6.000
57.41		1.000				
30	1	57	44	5059.	0.1525E+05	6.000
50.84		1.000				
31	1	57	43	5059.	0.1499E+05	6.000
49.97		1.000				
32	1	57	42	5059.	0.1559E+05	6.000
51.96		1.000				
33	1	56	42	5059.	0.1279E+05	6.000
42.63		1.000				
34	1	56	41	5059.	0.1505E+05	6.000
50.16		1.000				
35	1	56	40	5059.	0.1502E+05	6.000
50.08		1.000				
36	1	56	39	5060.	0.1494E+05	6.000
49.80		1.000				
37	1	56	38	5060.	0.1493E+05	6.000
49.78		1.000				
38	1	56	37	5060.	0.1494E+05	6.000
49.79		1.000				
39	1	56	36	5060.	0.1494E+05	6.000
49.79		1.000				
40	1	56	35	5060.	0.1494E+05	6.000
49.79		1.000				
41	1	56	34	5060.	0.1494E+05	6.000
49.79		1.000				
42	1	56	33	5060.	0.1684E+05	6.000
56.13		1.000				
43	1	55	33	5060.	0.1433E+05	6.000
47.78		1.000				
44	1	55	32	5060.	0.1499E+05	6.000
49.96		1.000				

APPENDIX B

45	1	55	31	5060.	0.1496E+05	6.000
49.87		1.000				
46	1	55	30	5061.	0.1464E+05	6.000
48.79		1.000				
47	1	54	30	5061.	0.1495E+05	6.000
49.82		1.000				
48	1	54	29	5061.	0.1494E+05	6.000
49.79		1.000				
49	1	54	28	5061.	0.1524E+05	6.000
50.80		1.000				
50	1	53	28	5061.	0.1559E+05	6.000
51.98		1.000				
51	1	53	27	5061.	6566.	6.000
21.89		1.000				
52	1	61	110	5050.	6977.	6.000
46.51		2.000				
53	1	61	109	5050.	7465.	6.000
49.77		2.000				
54	1	61	108	5050.	7465.	6.000
49.77		2.000				
55	1	61	107	5050.	7465.	6.000
49.77		2.000				
56	1	61	106	5050.	7465.	6.000
49.77		2.000				
57	1	61	105	5050.	7465.	6.000
49.77		2.000				
58	1	61	104	5050.	7465.	6.000
49.77		2.000				
59	1	61	103	5050.	7465.	6.000
49.77		2.000				
60	1	61	102	5050.	7465.	6.000
49.77		2.000				
61	1	61	101	5050.	7465.	6.000
49.77		2.000				
62	1	61	100	5050.	7465.	6.000
49.77		2.000				
63	1	61	99	5050.	7465.	6.000
49.77		2.000				
64	1	61	98	5050.	7465.	6.000
49.77		2.000				
65	1	61	97	5050.	104.7	6.000
0.6979		2.000				
66	1	61	97	5045.	2833.	6.000
18.89		3.000				
67	1	62	97	5045.	7448.	6.000
49.65		3.000				
68	1	63	97	5046.	9618.	6.000
64.12		3.000				
69	1	64	97	5046.	3006.	6.000
20.04		3.000				
70	1	64	96	5046.	9258.	6.000
61.72		3.000				
71	1	64	95	5046.	7466.	6.000
49.77		3.000				

APPENDIX B

72	1	64	94	5047.	7466.	6.000
49.77		3.000				
73	1	64	93	5047.	7466.	6.000
49.77		3.000				
74	1	64	92	5047.	7466.	6.000
49.77		3.000				
75	1	64	91	5048.	7466.	6.000
49.77		3.000				
76	1	64	90	5048.	7466.	6.000
49.77		3.000				
77	1	64	89	5048.	7466.	6.000
49.77		3.000				
78	1	64	88	5048.	7466.	6.000
49.77		3.000				
79	1	64	87	5049.	7466.	6.000
49.77		3.000				
80	1	64	86	5049.	7466.	6.000
49.77		3.000				
81	1	64	85	5049.	7466.	6.000
49.77		3.000				
82	1	64	84	5050.	7466.	6.000
49.77		3.000				
83	1	64	83	5050.	7466.	6.000
49.77		3.000				
84	1	64	82	5050.	7466.	6.000
49.77		3.000				
85	1	64	81	5050.	7466.	6.000
49.77		3.000				
86	1	64	80	5051.	7466.	6.000
49.77		3.000				
87	1	64	79	5051.	7466.	6.000
49.77		3.000				
88	1	64	78	5051.	6296.	6.000
41.97		3.000				
89	1	63	78	5052.	4106.	6.000
27.37		3.000				
90	1	63	77	5052.	6477.	6.000
43.18		3.000				
91	1	62	77	5052.	3950.	6.000
26.33		3.000				

91 DRAINS

SOLVING FOR HEAD

OUTPUT CONTROL FOR STRESS PERIOD 1 TIME STEP 1

PRINT BUDGET

SAVE HEAD FOR ALL LAYERS

SAVE BUDGET

UBDSV2 SAVING " CONSTANT HEAD" ON UNIT 40 AT TIME STEP 1, STRESS
PERIOD 1

UBDSV1 SAVING "FLOW RIGHT FACE " ON UNIT 40 AT TIME STEP 1, STRESS
PERIOD 1

APPENDIX B

UBDSV1 SAVING "FLOW FRONT FACE " ON UNIT 40 AT TIME STEP 1, STRESS
 PERIOD 1
 UBDSV4 SAVING " DRAINS" ON UNIT 40 AT TIME STEP 1, STRESS
 PERIOD 1
 UBDSV3 SAVING " RECHARGE" ON UNIT 40 AT TIME STEP 1, STRESS
 PERIOD 1

SAVING SATURATED THICKNESS AND FLOW TERMS ON UNIT 333 FOR MT3DMS
 BY THE LINK-MT3DMS PACKAGE V7 AT TIME STEP 1, STRESS PERIOD 1

HEADS AT DRAIN CELLS ARE BELOW THE BOTTOM OF THE DRAIN BED AT THE CELLS
 LISTED

BELOW. THESE CONDITIONS DIMINISH THE IMPACT OF THE OBSERVATION ON
 ESTIMATES OF

ALL PARAMETERS EXCEPT THOSE THAT CONTROL THE HYDRAULIC CONDUCTIVITY OF
 THE

DRAIN BED. (SEE TEXT FOR MORE INFORMATION).

OBS#	1, ID	no_drnf0	, TIME STEP	1
LAYER	ROW	COLUMN		
1	57	67		
1	57	66		
1	57	65		
1	57	64		
1	57	63		
1	58	60		
1	59	56		
1	59	48		
1	58	46		
1	57	44		
1	56	42		
1	55	33		
1	54	30		
1	53	28		
14 OF THE	51	CELLS USED TO SIMULATE THE GAIN OR LOSS ARE		
		AFFECTED.		

OBS#	2, ID	no_drnf1	, TIME STEP	1
LAYER	ROW	COLUMN		
1	61	103		
1	61	102		
1	61	101		
1	61	100		
1	61	99		
1	61	98		
1	61	97		
7 OF THE	14	CELLS USED TO SIMULATE THE GAIN OR LOSS ARE		
		AFFECTED.		

OBS#	3, ID	no_drnf2	, TIME STEP	1
LAYER	ROW	COLUMN		
1	61	97		
1	63	78		

APPENDIX B

2 OF THE 27 CELLS USED TO SIMULATE THE GAIN OR LOSS ARE
AFFECTED.

HEAD WILL BE SAVED ON UNIT 3 AT END OF TIME STEP 1, STRESS PERIOD
1

1

VOLUMETRIC BUDGET FOR ENTIRE MODEL AT END OF TIME STEP 1, STRESS
PERIOD 1

CUMULATIVE VOLUMES L**3/T	L**3	RATES FOR THIS TIME STEP
-----		-----
IN: ---		IN: ---
STORAGE =	0.0000	STORAGE =
0.0000		
CONSTANT HEAD =	31629.7676	CONSTANT HEAD =
31629.7676		
DRAINS =	0.0000	DRAINS =
0.0000		
RECHARGE =	34295.9414	RECHARGE =
34295.9414		
TOTAL IN =	65925.7109	TOTAL IN =
65925.7109		
OUT: ----		OUT: ----
STORAGE =	0.0000	STORAGE =
0.0000		
CONSTANT HEAD =	45039.4570	CONSTANT HEAD =
45039.4570		
DRAINS =	20886.2637	DRAINS =
20886.2637		
RECHARGE =	0.0000	RECHARGE =
0.0000		
TOTAL OUT =	65925.7188	TOTAL OUT =
65925.7188		
IN - OUT =	-7.8125E-03	IN - OUT =
7.8125E-03		-
PERCENT DISCREPANCY =	-0.00	PERCENT DISCREPANCY =
-0.00		

APPENDIX B

YEARS	TIME SUMMARY AT END OF SECONDS	TIME STEP MINUTES	1 IN STRESS HOURS	PERIOD DAYS	1
TIME STEP LENGTH	86400.	1440.0	24.000	1.0000	
2.73785E-03					
STRESS PERIOD TIME	86400.	1440.0	24.000	1.0000	
2.73785E-03					
TOTAL TIME	86400.	1440.0	24.000	1.0000	
2.73785E-03					
1					

DRAIN FLOW OBSERVATIONS

OBSERVATION NAME	OBSERVED VALUE	SIMULATED VALUE	DIFFERENCE
no_drnf0	1.0000000000	-8706.0351562	8707.0351562
no_drnf1	1.0000000000	-1550.3986816	1551.3986816
no_drnf2	1.0000000000	-10638.759766	10639.759766

DRN FLOW SUM OF SQUARED DIFFERENCE: 1.91424E+08

Run end date and time (yyyy/mm/dd hh:mm:ss): 2023/01/06 11:32:21
 Elapsed run time: 0.567 Seconds