

LINE TABLE		
LINE	BEARING	LENGTH
L3	N79°41'18"E	95.91'
L4	N29°08'19"E	131.58'

1. PLACE SILT FENCING OR STRAW WATTLES AT TOE OF FILL SLOPES, FULL LENGTH.
2. TOPSOIL DEPTH IS CONSIDERED TO BE 0.5'.
3. DRAWING BASED ON SURVEY DATA COLLECTED AND COMPILED BY POWERS ENTERPRISES, INC., DATED 7/16/2020.
4. DISCHARGE PIT CAPACITY BASED OFF OF VOLUME EXCAVATED FOR PIT.




County: Rio Blanco	
Township 2S	Range 100W
Section: 10	Quarter: SWSE
P.M. 6th	
FG CENTER PAD: 8391.61	
Drawn By: TLB	PE: TLB
QC: Xx	Project: 2020-530.001
Sheet 04 of 06	Date: 11/17/2020

-



Shale Tech International Services LLC.
PROPOSED PAD FOR CORE HOLE MER 2020.03

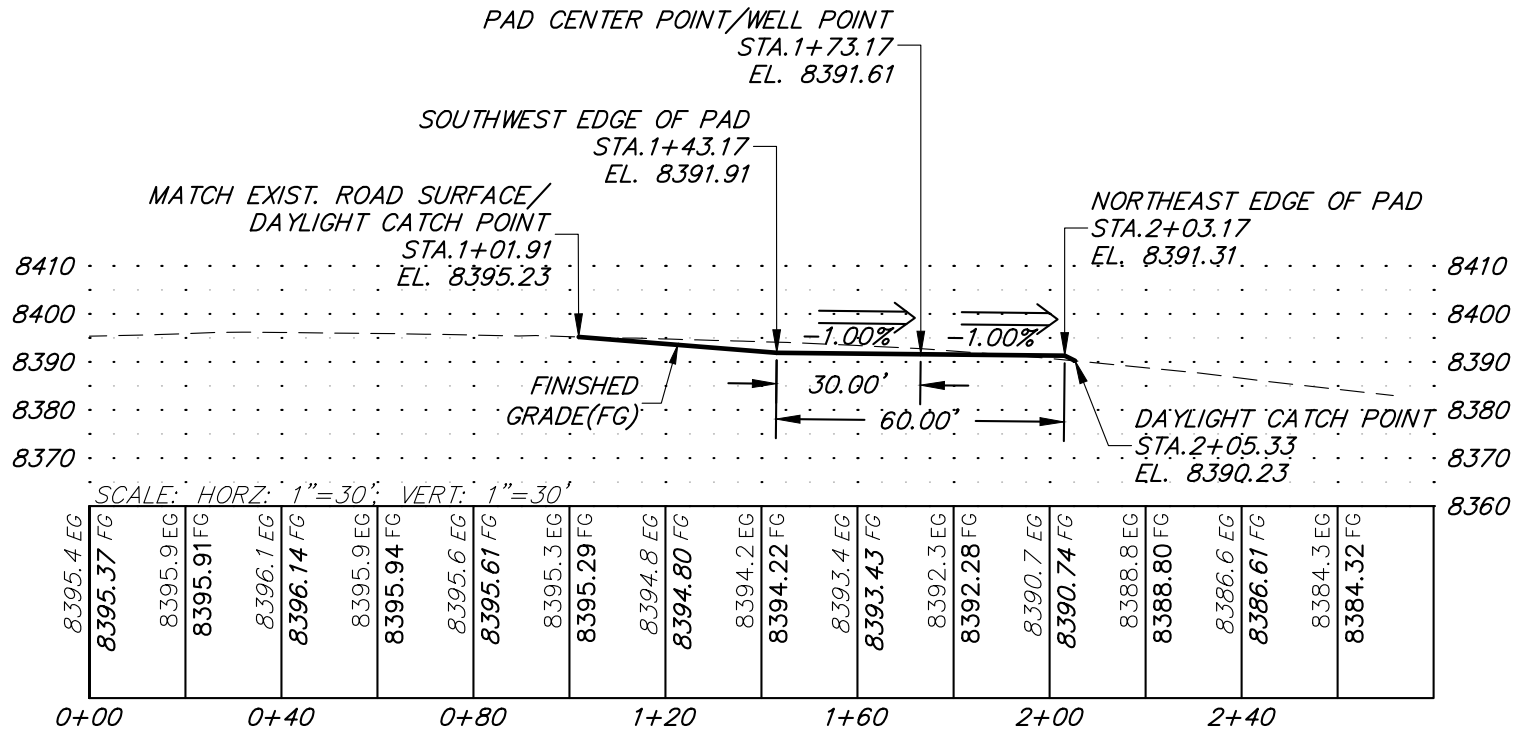


SECTION A-A' - MER 2020.03

County: Rio Blanco	
Township 2S	Range 100W
Section: 10	Quarter: SWSE
P.M. 6th	
Ground Elevation: 8391.61	
Drawn By: TLB	PE: TLB
QC: Xx	Project: 2020-530.001
Sheet 05 of 06	Date: 11/17/2020



Shale Tech International Services LLC.
PROPOSED PAD FOR CORE HOLE MER 2020.03

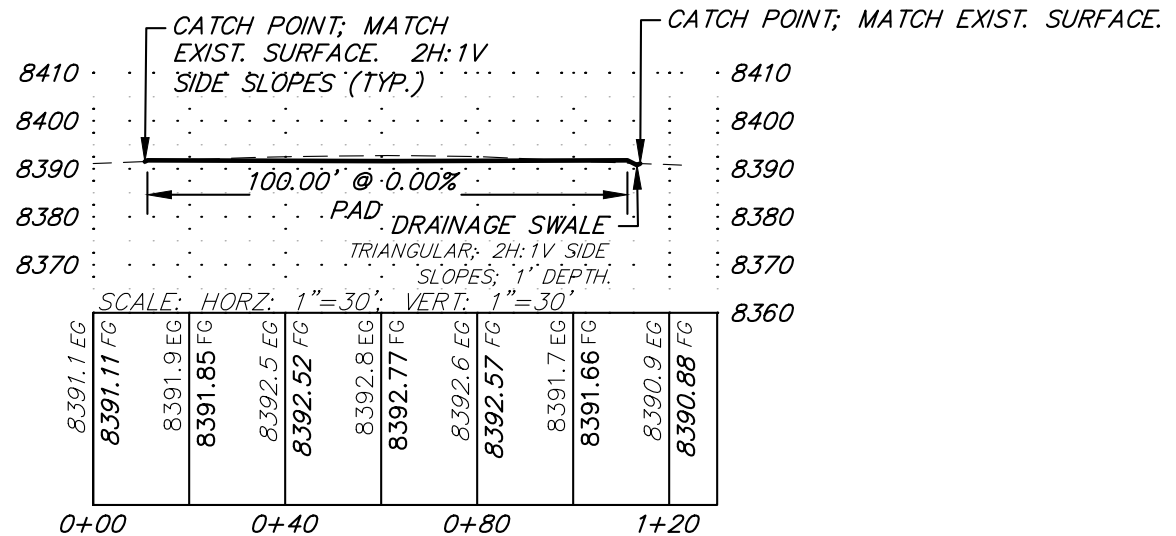

SECTION B-B' - MER 2020.03

County: Rio Blanco

Township 2S Range 100W

Section: 10 Quarter: SWSE

P.M. 6th

FG CENTER PAD: 8391.59

Drawn By: TLB PE: TLB

QC: Xx Project: 2020-530.001

Sheet 06 of 06 Date: 11/17/2020



Shale Tech International Services LLC.
PROPOSED PAD FOR CORE HOLE MER 2020.03