



MINERAL PROSPECTING DRILL HOLE
PERMANENT ABANDONMENT FINAL REPORT

Pursuant to the terms of 34-32-113(5.5)(d) and (e) of the Act and Rule 5.7 of the Mineral Rules and Regulations of the Colorado Mined Land Reclamation Board for Hard Rock, Metal, and Designated Mining Operations, abandonment reports shall be submitted to the Division within 60 days of abandonment for any drill hole with artesian flow, or within 12 months of abandonment for any other drill hole.

Tallahassee (PROSPECT SITE NAME) P-2023-015 (PROSPECT NOI No.)

I. DRILL HOLE: Drill Hole I.D. No.

TC-2401

For this Section I, please attach completed drill hole logs OR complete the following information:

561' 657' (Total Depth) 12' (Depth of Unconsolidated Material) 555' (Depth of Penetration into Bedrock)

Was water encountered: No ☐ Yes ☒ if so, at what depth(s): 80'

Was water encountered in either Volcanic or Sedimentary Rock: No ☐ Yes ☒

Date Drilled: May 8-12, 2024 Date Permanently Abandoned: May 13, 2024

II. OPERATOR (PROSPECTOR):

***DRILLER:**

Tallahassee Resources, LLC (Name) Colby Davis (Name)

P.O. Box 776 (Address) 2200 S Yarrow W (Address)

South Fork (City) CO (State) Salt Lake City (City) UT (State)

81154 (Zip) (719) 306-3065 (Telephone No.) 84088 (Zip) (801) 974-0645 (Telephone No.)

III. LOCATION:

The following information is required for ALL prospecting drill holes:



SW 1/4 of the NE 1/4 of Section 27 Township 17S Range 73W

6th Principal Meridian Freemont County

If the area has not been surveyed, supply the Longitude West and Latitude North, or attach a location map, preferably a USGS Quad.

The following additional information is required for artesian flowing holes: NA

Feet ☐ North ☐ South from the ☐ South ☐ North section line

feet ☐ east ☐ West from the ☐ west ☐ East section line

NOTE: In the case of closely spaced drill holes having similar geologic and hydrologic characteristics, the Operator may, with the approval of the Division, submit a single consolidated final report including the location of all drill holes and a description of abandonment technique. In such case, complete one abandonment final report form and attach a list of drill hole locations. If more space is needed to provide any of the information for this form, please attach separate sheets.

IV. Complete Either Subsection A or B:

PERMANENT ABANDONMENT (Check either box 1 or subsection 2 boxes as appropriate and provide the requested information)

☒ 1. Plugged dry hole, method of plugging: Cement & Abandonment

Depth at which concrete plug set: 80 feet below ground surface. See sketch

☐ 2. Sealed Hole (when groundwater is encountered):

☐ 2a. Neat Cement Grout, top to bottom: grout mixture used:

Intervals grouted (feet beneath ground surface, method and materials):

☐ 2b. Neat Cement Grout, interval grouting: grout mixture used:

Intervals grouted (feet beneath ground surface, method and materials):

☐ 2c. Abandonment Fluid Mixture (Such as Sodium Bentonite with Polymer) Brand Name:

Marsh Funnel viscosity of abandonment fluid: sec.

Type of surface plugging used:

Cement

Depth at which plug set:

20'

feet below ground surface,

Method:

Pumped with grout



2d. Other method used with approval of the Division of Reclamation, Mining and Safety; describe in detail method and materials used on a separate attached sheet.

B. CONVERSION TO A WATER WELL

State Engineer's Permit No.:

(attach copy of permit)

County Where Well is Located:

Water Well Use:

V. METHOD OF RECLAIMING DRILL SITE SURFACE DISTURBANCE:

Drill site was recontoured to previous grade using a mini excavator and skid steer and the existing topsoil. It was reseeded using DRMS approved seed mix by hand broadcast due to the slope and the gravelly soil.


The Operator who conducted the prospecting drill operation states that the information set forth hereupon is true to the best of their knowledge.

Tim Brown

(Name of Operator's Representative)

U.S. Country Manager

(Title)



(Signature of Operator's Representative)

May 13, 2024

(Date)


Colby Davis

Driller's Representative

5-13-24

(Date)

TL 2401
Abandonment Sketch

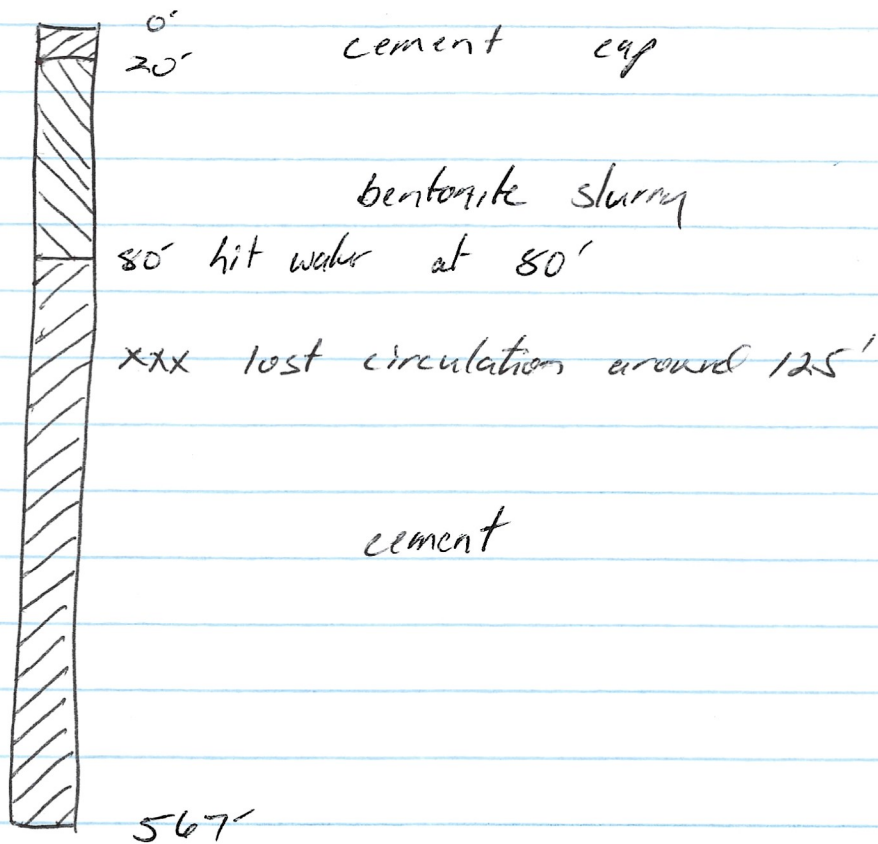



MINERAL PROSPECTING DRILL HOLE
PERMANENT ABANDONMENT FINAL REPORT

Pursuant to the terms of 34-32-113(5.5)(d) and (e) of the Act and Rule 5.7 of the Mineral Rules and Regulations of the Colorado Mined Land Reclamation Board for Hard Rock, Metal, and Designated Mining Operations, abandonment reports shall be submitted to the Division within 60 days of abandonment for any drill hole with artesian flow, or within 12 months of abandonment for any other drill hole.

Tallahassee (PROSPECT SITE NAME) P-2023-015 (PROSPECT NOI No.)

I. DRILL HOLE: Drill Hole I.D. No.

TC2402

For this Section I, please attach completed drill hole logs OR complete the following information:

700 (Total Depth) (Depth of Unconsolidated Material) (Depth of Penetration into Bedrock)

Was water encountered: No ☐ Yes ☐ if so, at what depth(s):

Was water encountered in either Volcanic or Sedimentary Rock: No ☐ Yes ☐

Date Drilled: May 13-16, 2024 Date Permanently Abandoned: May 16, 2024

II. OPERATOR (PROSPECTOR) :

DRILLER:

Tallahassee Resources, LLC (Name) Colby Davis (Name)

PO Box 776 (Address) 2200 S Yucca W (Address)

South Fork (City) CO (State) Salt Lake City (City) UT (State)

81154 (Zip) (719) 306-3065 (Telephone No.) 84088 (Zip) (801) 974-0645 (Telephone No.)

III. LOCATION:

The following information is required for ALL prospecting drill holes:



SW 1/4 of the NE 1/4 of Section 21 Township 17 S Range 73 W

6th Principal Meridian Fremont County

If the area has not been surveyed, supply the Longitude West and Latitude North, or attach a location map, preferably a USGS Quad.

The following additional information is required for artesian flowing holes: NA

 Feet ☐ North ☐ South from the ☐ South ☐ North section line

 feet ☐ east ☐ West from the ☐ west ☐ East section line

NOTE: In the case of closely spaced drill holes having similar geologic and hydrologic characteristics, the Operator may, with the approval of the Division, submit a single consolidated final report including the location of all drill holes and a description of abandonment technique. In such case, complete one abandonment final report form and attach a list of drill hole locations. If more space is needed to provide any of the information for this form, please attach separate sheets.

IV. Complete Either Subsection A or B:

PERMANENT ABANDONMENT (Check either box 1 or subsection 2 boxes as appropriate and provide the requested information)

☐ 1. Plugged dry hole, method of plugging:

Depth at which concrete plug set: feet below ground surface.

☐ 2. Sealed Hole (when groundwater is encountered):

☐ 2a. Neat Cement Grout, top to bottom: grout mixture used:

Intervals grouted (feet beneath ground surface, method and materials):

☒ 2b. Neat Cement Grout, interval grouting: grout mixture used:

Mixed 32 qt. 6# bags portland type 1/1 cement

Intervals grouted (feet beneath ground surface, method and materials):

pumped @ 690' filling approx 500' of HQ Drill hole

☒ 2c. Abandonment Fluid Mixture (Such as Sodium Bentonite with Polymer) Brand Name: Abandon-it

6 bags 33 gal water per bag

Marsh Funnel viscosity of abandonment fluid:

NA to thick to funnel sec.
test

Type of surface plugging used:

portland cement

Depth at which plug set:

20'

feet below ground surface,

Method:

mud displaced and poured to surface



2d. Other method used with approval of the Division of Reclamation, Mining and Safety; describe in detail method and materials used on a separate attached sheet.

B. CONVERSION TO A WATER WELL

State Engineer's Permit No.:

(attach copy of permit)

County Where Well is Located:

Water Well Use:

V. METHOD OF RECLAIMING DRILL SITE SURFACE DISTURBANCE:

Drill site was recontoured to previous grade using a mini excavator and skid steer and the existing topsoil. It was reseeded using DRMS approved seed mix by hand broadcast due to the slope and the gravelly soil.


The Operator who conducted the prospecting drill operation states that the information set forth hereupon is true to the best of their knowledge.

Tim Brown

(Name of Operator's Representative)

U.S. County Manager

(Title)



(Signature of Operator's Representative)

June 9, 2024

(Date)

Colby Davis

my n'

5-16-24



MINERAL PROSPECTING DRILL HOLE
PERMANENT ABANDONMENT FINAL REPORT

Pursuant to the terms of 34-32-113(5.5)(d) and (e) of the Act and Rule 5.7 of the Mineral Rules and Regulations of the Colorado Mined Land Reclamation Board for Hard Rock, Metal, and Designated Mining Operations, abandonment reports shall be submitted to the Division within 60 days of abandonment for any drill hole with artesian flow, or within 12 months of abandonment for any other drill hole.

Talla Hassce P-2023-015
(PROSPECT SITE NAME) (PROSPECT NOI No.)

I. DRILL HOLE: Drill Hole I.D. No.

TC-2403

For this Section I, please attach completed drill hole logs OR complete the following information:

696.5' 20' 676.5'
(Total Depth) (Depth of Unconsolidated Material) (Depth of Penetration into Bedrock)

Was water encountered: No ☐ Yes ☐ if so, at what depth(s):

Was water encountered in either Volcanic or Sedimentary Rock: No ☐ Yes ☐

Date Drilled: 05-17-24 05-20-24 Date Permanently Abandoned: 05-20-24

II. OPERATOR (PROSPECTOR):

DRILLER:

Talla Hassce Resources LLC Jean Hegbloom
(Name) (Name)

PO Box 776 2200 S 4000 W
(Address) (Address)

South Fork CO Salt Lake City UT
(City) (State) (City) (State)

81154 (719) 306-3065 84088 (59) 992-4624
(Zip) (Telephone No.) (Zip) (Telephone No.)

III. LOCATION:

The following information is required for ALL prospecting drill holes:



NW 1/4 of the SE 1/4 of Section 21 Township 17 S Range 73 W

6th Principal Meridian Freemont County

If the area has not been surveyed, supply the Longitude West and Latitude North, or attach a location map, preferably a USGS Quad.

The following additional information is required for artesian flowing holes: NA

 Feet North South from the South North section line

 feet east West from the west East section line

NOTE: In the case of closely spaced drill holes having similar geologic and hydrologic characteristics, the Operator may, with the approval of the Division, submit a single consolidated final report including the location of all drill holes and a description of abandonment technique. In such case, complete one abandonment final report form and attach a list of drill hole locations. If more space is needed to provide any of the information for this form, please attach separate sheets.

IV. Complete Either Subsection A or B:

PERMANENT ABANDONMENT (Check either box 1 or subsection 2 boxes as appropriate and provide the requested information)

☐ 1. Plugged dry hole, method of plugging: ~~Cement & Abandonment~~

Depth at which concrete plug set: feet below ground surface.

☐ 2. Sealed Hole (when groundwater is encountered):

☐ 2a. Neat Cement Grout, top to bottom: grout mixture used:

Intervals grouted (feet beneath ground surface, method and materials):

☒ 2b. Neat Cement Grout, interval grouting: grout mixture used:

~~Pumped~~ Mixed 30.5 92.6 # bags Portland Limestone Cement

Intervals grouted (feet beneath ground surface, method and materials):

Pumped @ 690' filling approx 490' of HQ drill hole

☒ 2c. Abandonment Fluid Mixture (Such as Sodium Bentonite with Polymer) Brand Name: ABANTONITE

5 bags ~~to 8th~~ 33 gal water per bag.

Marsh Funnel viscosity of abandonment fluid:

N/A too thick for

sec.

funnel test

Type of surface plugging used:

Type ~~2 1/2~~ 1 1/2 Portland

Depth at which plug set:

20'

feet below ground surface,

Method:

~~Poured~~ displaced & pumped from surface

2d. Other method used with approval of the Division of Reclamation, Mining and Safety; describe in detail method and materials used on a separate attached sheet.

B. CONVERSION TO A WATER WELL

State Engineer's Permit No.:

(attach copy of permit)

County Where Well is Located:

Water Well Use:

V. METHOD OF RECLAIMING DRILL SITE SURFACE DISTURBANCE:

Drill site was recontoured to previous grade using a mini excavator and skid steer and the existing topsoil. It was reseeded using DRMS approved seed mix by hand broadcast due to the slope and the gravelly soil.

The Operator who conducted the prospecting drill operation states that the information set forth hereupon is true to the best of their knowledge.

Tim Brown

(Name of Operator's Representative)

U.S. Country Manager

(Title)

Jean Hegbloom

(Signature of Operator's Representative)

June 9, 2024

(Date)

Jean Hegbloom

5-20-24





MINERAL PROSPECTING DRILL HOLE
PERMANENT ABANDONMENT FINAL REPORT

Pursuant to the terms of 34-32-113(5.5)(d) and (e) of the Act and Rule 5.7 of the Mineral Rules and Regulations of the Colorado Mined Land Reclamation Board for Hard Rock, Metal, and Designated Mining Operations, abandonment reports shall be submitted to the Division within 60 days of abandonment for any drill hole with artesian flow, or within 12 months of abandonment for any other drill hole.

Tallahassee P 2023-015
(PROSPECT SITE NAME) (PROSPECT NOI No.)

I. DRILL HOLE: Drill Hole I.D. No.

TC-2484

For this Section I, please attach completed drill hole logs **OR** complete the following information:

727 22' 705'
(Total Depth) (Depth of Unconsolidated Material) (Depth of Penetration into Bedrock)

Was water encountered: No ☐ Yes ☐ if so, at what depth(s):

Was water encountered in either Volcanic or Sedimentary Rock: No ☐ Yes ☐

Date Drilled: 05-21-24 05-23-24 Date Permanently Abandoned: 05-23-24

II. OPERATOR (PROSPECTOR):

DRILLER:

Tallahassee Resources LLC Jean Heggblom
(Name) (Name)

PO Box 776 2200 S. 4000 W
(Address) (Address)

South Fork CO Salt Lake City UT
(City) (State) (City) (State)

81154 (719) 306-3065 84088 (509) 992-4624
(Zip) (Telephone No.) (Zip) (Telephone No.)

III. LOCATION:

The following information is required for ALL prospecting drill holes:



NE 1/4 of the SE 1/4 of Section 21 Township 17 S Range 73 W

6th Principal Meridian Fremont County

If the area has not been surveyed, supply the Longitude West and Latitude North, or attach a location map, preferably a USGS Quad.

The following additional information is required for artesian flowing holes: NA

 Feet ☐ North ☐ South from the ☐ South ☐ North section line

 feet ☐ east ☐ West from the ☐ west ☐ East section line

NOTE: In the case of closely spaced drill holes having similar geologic and hydrologic characteristics, the Operator may, with the approval of the Division, submit a single consolidated final report including the location of all drill holes and a description of abandonment technique. In such case, complete one abandonment final report form and attach a list of drill hole locations. If more space is needed to provide any of the information for this form, please attach separate sheets.

IV. Complete Either Subsection A or B:

PERMANENT ABANDONMENT (Check either box 1 or subsection 2 boxes as appropriate and provide the requested information)

☐ 1. Plugged dry hole, method of plugging:

Depth at which concrete plug set: feet below ground surface.

☐ 2. Sealed Hole (when groundwater is encountered):

☐ 2a. Neat Cement Grout, top to bottom: grout mixture used:

Intervals grouted (feet beneath ground surface, method and materials):

☒ 2b. Neat Cement Grout, interval grouting: grout mixture used:

Mixed 32 bags Type II Portland cement Pumped @ 600'

Intervals grouted (feet beneath ground surface, method and materials):

Filled approx 509'

☒ 2c. Abandonment Fluid Mixture (Such as Sodium Bentonite with Polymer) Brand Name:

5 bags Abandonite pumped @ 400'

Marsh Funnel viscosity of abandonment fluid:

vis too high for funnel sec.

Type of surface plugging used:

Type 1L Portland cement

Depth at which plug set:

20'

feet below ground surface,

Method:

Poured after plugging @ 20'



2d. Other method used with approval of the Division of Reclamation, Mining and Safety; describe in detail method and materials used on a separate attached sheet.

B. CONVERSION TO A WATER WELL

State Engineer's Permit No.:

(attach copy of permit)


County Where Well is Located:

Water Well Use:


V. METHOD OF RECLAIMING DRILL SITE SURFACE DISTURBANCE:

Drill site was recontoured to previous grade using a mini excavator and the existing topsoil. It was reseeded using DRMS approved seed mix by hand broadcast due to the minimal vegetation disturbance and the presence of grazing cattle.

The Operator who conducted the prospecting drill operation states that the information set forth hereupon is true to the best of their knowledge.




(Name of Operator's Representative)



(Title)



(Signature of Operator's Representative)



(Date)

Jean Hegbloom 5-23-24





MINERAL PROSPECTING DRILL HOLE
PERMANENT ABANDONMENT FINAL REPORT

Pursuant to the terms of 34-32-113(5.5)(d) and (e) of the Act and Rule 5.7 of the Mineral Rules and Regulations of the Colorado Mined Land Reclamation Board for Hard Rock, Metal, and Designated Mining Operations, abandonment reports shall be submitted to the Division within 60 days of abandonment for any drill hole with artesian flow, or within 12 months of abandonment for any other drill hole.

Tallahassee P - 2023 - 015
(PROSPECT SITE NAME) (PROSPECT NOI No.)

I. DRILL HOLE: Drill Hole I.D. No.

TC2405

For this Section I, please attach completed drill hole logs OR complete the following information:

750
(Total Depth) (Depth of Unconsolidated Material) (Depth of Penetration into Bedrock)

Was water encountered: No ☐ Yes ☐ if so, at what depth(s):

Was water encountered in either Volcanic or Sedimentary Rock: No ☐ Yes ☐

Date Drilled: 6/24/24 - 6/27/24 Date Permanently Abandoned: 6/27/24

II. OPERATOR (PROSPECTOR) :

DRILLER:

Tallahassee Resources, LLC Colby Davis
(Name) (Name)

PO Box 776 2200 S 4100 W
(Address) (Address)

South Fork CO Salt Lake City UT
(City) (State) (City) (State)

81154 (719) 306-3065 84088 (801) 974-0645
(Zip) (Telephone No.) (Zip) (Telephone No.)

III. LOCATION:

The following information is required for ALL prospecting drill holes:



SE 1/4 of the SE 1/4 of Section 21 Township 17 S Range 73 W

6th Principal Meridian Fremont County

If the area has not been surveyed, supply the Longitude West and Latitude North, or attach a location map, preferably a USGS Quad.

The following additional information is required for artesian flowing holes: NA

 Feet ☐ North ☐ South from the ☐ South ☐ North section line

 feet ☐ east ☐ West from the ☐ west ☐ East section line

NOTE: In the case of closely spaced drill holes having similar geologic and hydrologic characteristics, the Operator may, with the approval of the Division, submit a single consolidated final report including the location of all drill holes and a description of abandonment technique. In such case, complete one abandonment final report form and attach a list of drill hole locations. If more space is needed to provide any of the information for this form, please attach separate sheets.

IV. Complete Either Subsection A or B:

PERMANENT ABANDONMENT (Check either box 1 or subsection 2 boxes as appropriate and provide the requested information)

☐ 1. Plugged dry hole, method of plugging:

Depth at which concrete plug set: feet below ground surface.

☐ 2. Sealed Hole (when groundwater is encountered):

☐ 2a. Neat Cement Grout, top to bottom: grout mixture used:

Intervals grouted (feet beneath ground surface, method and materials):

☒ 2b. Neat Cement Grout, interval grouting: grout mixture used:

Mixed 35 92.6 # Bags of portland limestone cement

Intervals grouted (feet beneath ground surface, method and materials):

Pumped @ 740' filling approx 530' of HQ drill hole

☒ 2c. Abandonment Fluid Mixture (Such as Sodium Bentonite with Polymer) Brand Name: Abandonite

5 bags 33 gal of water per bag

Marsh Funnel viscosity of abandonment fluid: N/A too thick for sec.

funnel test

Type of surface plugging used:

portland limestone cement

Depth at which plug set:

20'

feet below ground surface,

Method:

mixed and poured from surface



2d. Other method used with approval of the Division of Reclamation, Mining and Safety; describe in detail method and materials used on a separate attached sheet.

B. CONVERSION TO A WATER WELL

State Engineer's Permit No.:

(attach copy of permit)

County Where Well is Located:

Water Well Use:

V. METHOD OF RECLAIMING DRILL SITE SURFACE DISTURBANCE:

Drill site was recontoured to previous grade using a mini excavator and the existing topsoil. It was reseeded using DRMS approved seed mix by hand broadcast due to the minimal vegetation disturbance and the presence of grazing cattle.

The Operator who conducted the prospecting drill operation states that the information set forth hereupon is true to the best of their knowledge.

Tim Brown

(Name of Operator's Representative)

U.S. Country Manager

(Title)

[Signature]

(Signature of Operator's Representative)

June 9, 2024

(Date)

Colby Davis 5-27-24

my n



MINERAL PROSPECTING DRILL HOLE
PERMANENT ABANDONMENT FINAL REPORT

Pursuant to the terms of 34-32-113(5.5)(d) and (e) of the Act and Rule 5.7 of the Mineral Rules and Regulations of the Colorado Mined Land Reclamation Board for Hard Rock, Metal, and Designated Mining Operations, abandonment reports shall be submitted to the Division within 60 days of abandonment for any drill hole with artesian flow, or within 12 months of abandonment for any other drill hole.

Tallahassee P 2023-015
(PROSPECT SITE NAME) (PROSPECT NOI No.)

I. DRILL HOLE: Drill Hole I.D. No.

TC 240 #6

For this Section I, please attach completed drill hole logs OR complete the following information:

708
(Total Depth) (Depth of Unconsolidated Material) (Depth of Penetration into Bedrock)

Was water encountered: No ☐ Yes ☐ if so, at what depth(s):

Was water encountered in either Volcanic or Sedimentary Rock: No ☐ Yes ☐

Date Drilled: 5-28-24 ~ 5-30-24 Date Permanently Abandoned: 5-30-24

II. OPERATOR (PROSPECTOR):

DRILLER:

Tallahassee Resources, LLC Colby Davis
(Name) (Name)

PO Box 776 2200 S 4000 W
(Address) (Address)

South Fork CO Salt Lake City UT
(City) (State) (City) (State)

81154 (719) 306-3065 87088 (801) 974-0645
(Zip) (Telephone No.) (Zip) (Telephone No.)

III. LOCATION:

The following information is required for ALL prospecting drill holes:



NW 1/4 of the SW 1/4 of Section 22 Township 17S Range 73W

6th Principal Meridian Fremont County

If the area has not been surveyed, supply the Longitude West and Latitude North, or attach a location map, preferably a USGS Quad.

The following additional information is required for artesian flowing holes:

 Feet ☐ North ☐ South from the ☐ South ☐ North section line
 feet ☐ east ☐ West from the ☐ west ☐ East section line

NOTE: In the case of closely spaced drill holes having similar geologic and hydrologic characteristics, the Operator may, with the approval of the Division, submit a single consolidated final report including the location of all drill holes and a description of abandonment technique. In such case, complete one abandonment final report form and attach a list of drill hole locations. If more space is needed to provide any of the information for this form, please attach separate sheets.

IV. Complete Either Subsection A or B:

PERMANENT ABANDONMENT (Check either box 1 or subsection 2 boxes as appropriate and provide the requested information)

☐ 1. Plugged dry hole, method of plugging:

Depth at which concrete plug set: feet below ground surface.

☐ 2. Sealed Hole (when groundwater is encountered):

☒ 2a. Neat Cement Grout, top to bottom: grout mixture used:

Mixed 3/ 42.5 lbs bags portland blastfurnace cement

Intervals grouted (feet beneath ground surface, method and materials):

☐ 2b. Neat Cement Grout, interval grouting: grout mixture used:

Pumped @ 650' Filling approx 492' of HQ Drill hole

Intervals grouted (feet beneath ground surface, method and materials):

☒ 2c. Abandonment Fluid Mixture (Such as Sodium Bentonite with Polymer) Brand Name: Abandonite

6 bags 33 gal water per bag

Marsh Funnel viscosity of abandonment fluid:

N/A too thick for sec.
funnel test

Type of surface plugging used:

portland cement

Depth at which plug set:

20'

feet below ground surface,

Method:

Displaced and poured to surface



2d. Other method used with approval of the Division of Reclamation, Mining and Safety; describe in detail method and materials used on a separate attached sheet.

B. CONVERSION TO A WATER WELL

State Engineer's Permit No.:

(attach copy of permit)

County Where Well is Located:

Water Well Use:

V. METHOD OF RECLAIMING DRILL SITE SURFACE DISTURBANCE:

Drill site was recontoured to previous grade using a mini excavator and the existing fill material and topsoil. It was reseeded using DRMS approved seed mix by hand broadcast due to the gravelly soil of the parking lot.

The Operator who conducted the prospecting drill operation states that the information set forth hereupon is true to the best of their knowledge.

Tim Brown

(Name of Operator's Representative)

U.S. Country Manager

(Title)

[Signature]

(Signature of Operator's Representative)

June 9, 2024

(Date)

Colby Davis

5-13-24

[Signature]



MINERAL PROSPECTING DRILL HOLE
PERMANENT ABANDONMENT FINAL REPORT

Pursuant to the terms of 34-32-113(5.5)(d) and (e) of the Act and Rule 5.7 of the Mineral Rules and Regulations of the Colorado Mined Land Reclamation Board for Hard Rock, Metal, and Designated Mining Operations, abandonment reports shall be submitted to the Division within 60 days of abandonment for any drill hole with artesian flow, or within 12 months of abandonment for any other drill hole.

Tallahassee P 2023-015
(PROSPECT SITE NAME) (PROSPECT NOI No.)

I. DRILL HOLE: Drill Hole I.D. No.

TC 2407

For this Section I, please attach completed drill hole logs **OR** complete the following information:

800 ft
(Total Depth) (Depth of Unconsolidated Material) (Depth of Penetration into Bedrock)

Was water encountered: No ☐ Yes ☐ if so, at what depth(s):

Was water encountered in either Volcanic or Sedimentary Rock: No ☐ Yes ☐

Date Drilled: June 4-8-7 Date Permanently Abandoned: 6/07/24

II. OPERATOR (PROSPECTOR):

DRILLER:

Tallahassee Resources, LLC Colby Davis
(Name) (Name)

PO Box 776 2200 S Yucca W
(Address) (Address)

South Fork CO South Fork City UT
(City) (State) (City) (State)

81154 (719) 306-3065 81488 (201) 974-0645
(Zip) (Telephone No.) (Zip) (Telephone No.)

III. LOCATION:

The following information is required for ALL prospecting drill holes:



NE 1/4 of the SE 1/4 of Section 21 Township 17 S Range 73 W

6th Principal Meridian Fremont County

If the area has not been surveyed, supply the Longitude West and Latitude North, or attach a location map, preferably a USGS Quad.

The following additional information is required for artesian flowing holes:

 Feet North South from the South North section line

 feet east West from the west East section line

NOTE: In the case of closely spaced drill holes having similar geologic and hydrologic characteristics, the Operator may, with the approval of the Division, submit a single consolidated final report including the location of all drill holes and a description of abandonment technique. In such case, complete one abandonment final report form and attach a list of drill hole locations. If more space is needed to provide any of the information for this form, please attach separate sheets.

IV. Complete Either Subsection A or B:

PERMANENT ABANDONMENT (Check either box 1 or subsection 2 boxes as appropriate and provide the requested information)

☐ 1. Plugged dry hole, method of plugging:

Depth at which concrete plug set: feet below ground surface.

☐ 2. Sealed Hole (when groundwater is encountered):

☐ 2a. Neat Cement Grout, top to bottom: grout mixture used:

Intervals grouted (feet beneath ground surface, method and materials):

☒ 2b. Neat Cement Grout, interval grouting: grout mixture used: Portland limestone cement

mixed 30 Bags 96.2 # filling approx 650' at hole

Intervals grouted (feet beneath ground surface, method and materials):

☒ 2c. Abandonment Fluid Mixture (Such as Sodium Bentonite with Polymer) Brand Name: Abendaik

mixed 6 Bags 50 #

Marsh Funnel viscosity of abandonment fluid:

to thick to funnel test sec.

Type of surface plugging used:

Mixed & poured to surface

Depth at which plug set:

70'

feet below ground surface,

Method:



2d. Other method used with approval of the Division of Reclamation, Mining and Safety; describe in detail method and materials used on a separate attached sheet.

B. CONVERSION TO A WATER WELL

State Engineer's Permit No.:

(attach copy of permit)

County Where Well is Located:

Water Well Use:

V. METHOD OF RECLAIMING DRILL SITE SURFACE DISTURBANCE:

Drill site was recontoured to previous grade using a bulldozer and the existing fill material and topsoil. It was reseeded using DRMS approved seed mix by hand broadcast due to the bouldery rocky soil.

The Operator who conducted the prospecting drill operation states that the information set forth hereupon is true to the best of their knowledge.

Tim Brown

(Name of Operator's Representative)

U.S. Country Manager

(Title)

[Signature]

(Signature of Operator's Representative)

June 9, 2024

(Date)

[Signature] 6-9-24

**COLORADO**Division of Reclamation,
Mining and Safety

Department of Natural Resources

MINERAL PROSPECTING DRILL HOLE
PERMANENT ABANDONMENT FINAL REPORT

Pursuant to the terms of 34-32-113(5.5)(d) and (e) of the Act and Rule 5.7 of the Mineral Rules and Regulations of the Colorado Mined Land Reclamation Board for Hard Rock, Metal, and Designated Mining Operations, abandonment reports shall be submitted to the Division within 60 days of abandonment for any drill hole with artesian flow, or within 12 months of abandonment for any other drill hole.

Tallahassee P 2023-015
(PROSPECT SITE NAME) (PROSPECT NOI No.)

I. DRILL HOLE: Drill Hole I.D. No.TC 2408

For this Section I, please attach completed drill hole logs OR complete the following information:

750
(Total Depth) (Depth of Unconsolidated Material) (Depth of Penetration into Bedrock)

Was water encountered: No ☐ Yes ☐ if so, at what depth(s):

Was water encountered in either Volcanic or Sedimentary Rock: No ☐ Yes ☐

Date Drilled: May 31 - June 3, 2024 Date Permanently Abandoned: June 3, 2024

II. OPERATOR (PROSPECTOR):**DRILLER:**

Tallahassee Resources, LLC Colby Davis
(Name) (Name)

PO Box 776 2200 S 4100 W
(Address) (Address)

South Fork CO salt lake city UT
(City) (State) (City) (State)

81154 (719) 306-3065 84-88 (801) 974-0845
(Zip) (Telephone No.) (Zip) (Telephone No.)

III. LOCATION:

The following information is required for ALL prospecting drill holes:



NE 1/4 of the SE 1/4 of Section 21 Township 17 S Range 73 W

6th Principal Meridian Fremont County

If the area has not been surveyed, supply the Longitude West and Latitude North, or attach a location map, preferably a USGS Quad.

The following additional information is required for artesian flowing holes: NA

 Feet ☐ North ☐ South from the ☐ South ☐ North section line

 feet ☐ east ☐ West from the ☐ west ☐ East section line

NOTE: In the case of closely spaced drill holes having similar geologic and hydrologic characteristics, the Operator may, with the approval of the Division, submit a single consolidated final report including the location of all drill holes and a description of abandonment technique. In such case, complete one abandonment final report form and attach a list of drill hole locations. If more space is needed to provide any of the information for this form, please attach separate sheets.

IV. Complete Either Subsection A or B:

PERMANENT ABANDONMENT (Check either box 1 or subsection 2 boxes as appropriate and provide the requested information)

☐ 1. Plugged dry hole, method of plugging:

Depth at which concrete plug set: feet below ground surface.

☐ 2. Sealed Hole (when groundwater is encountered):

☐ 2a. Neat Cement Grout, top to bottom: grout mixture used:

Intervals grouted (feet beneath ground surface, method and materials):

☒ 2b. Neat Cement Grout, interval grouting: grout mixture used: Portland limestone cement

mixture 33 962 # Bags filling Approx 600' other

Intervals grouted (feet beneath ground surface, method and materials):

☒ 2c. Abandonment Fluid Mixture (Such as Sodium Bentonite with Polymer) Brand Name: Abandonite

mixture 5 Bags

Marsh Funnel viscosity of abandonment fluid:

10 thier for barrel test sec.

Type of surface plugging used:

milled and paved to surface

Depth at which plug set:

20'

feet below ground surface,

Method:



2d. Other method used with approval of the Division of Reclamation, Mining and Safety; describe in detail method and materials used on a separate attached sheet.

B. CONVERSION TO A WATER WELL

State Engineer's Permit No.:

(attach copy of permit)

County Where Well is Located:

Water Well Use:

V. METHOD OF RECLAIMING DRILL SITE SURFACE DISTURBANCE:

Drill site was recontoured to previous grade using a bulldozer and the existing fill material and topsoil. It was reseeded using DRMS approved seed mix by hand broadcast due to the slope and the bouldery rocky soil.


The Operator who conducted the prospecting drill operation states that the information set forth hereupon is true to the best of their knowledge.

Tim Brown

(Name of Operator's Representative)

L.S. Country Manager

(Title)



(Signature of Operator's Representative)

June 9, 2024

(Date)



6-4-24