

## LEGEND:


PERMIT BOUNDARY EXISTING ROAD EXISTING 1 FOOT CONTOUR EXISTING 5 FOOT CONTOUR -8050-PROPOSED 5 FOOT CONTOUR -8070— PROPOSED 25 FOOT CONTOUR

## **NOTES:**

- 1. Reclamation to rangeland will occur concurrently with mining
- 2. As topscil and overburden are removed from active mining areas, they will be placed on slopes and pit floors of previous mined out areas.
- 3. Topsoil and overburden not immediately used for reclamation will be stockpiled on the pit floor.
- 4. The NRCS recommended and DRMS approved seed mix for the neighboring Verhoeff Pit will be used during final reclamation.
- 5. During reclamation, reseeded areas will be monitored for noxious weeds and appropriate methods to manage weed growth will be implemented.

SPECIES	PLS/ACRE (DRILL SEEDING)
BLUE GRAMA	0.6
SIDEOATS GRAMA	2.3
WESTERN WHEATGRASS	3.2
SAND DROPSEED	0.2
YELLOW SWEETCLOVER	0.4
1 If shill and all among the survivations and a survivation to the same the same and a survivation to the same and a survivati	

- If drill seeded, spacing will occur at seven to ten inch spacing intervals to a depth of  $\frac{1}{4}$  to  $\frac{1}{2}$  inches.
- 2. If broadcast seeded, 13.2 PLS lbs/acre will be placed

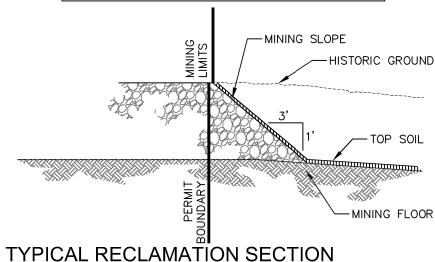

ALL

REGULAR 112 PERMIT APPLICATION

RITE PAVING AND REDI-MIX - LAMAR DIVISION

VERHOEFF GRAVEL PIT #1

VERHOEFF GRAVEL

blueearth

PLAN

RECLAMATION

**EXHIBIT**