



L.G. EVERIST, INC.

ROCK SOLID SINCE 1876

7321 E. 88TH AVENUE, SUITE 200

HENDERSON, COLORADO 80640

PHONE 303-287-9606 • FAX 303-289-1348

August 4, 2023

Division of Reclamation, Mining and Safety
1313 Sherman Street, Room 215
Denver, CO 80203

RE: DRMS Annual Fee and Report for M-1996-052, Firestone Gravel Resource
Permittee Name: L.G. Everist, Inc.
Anniversary: August 4

Dear Division:

The DRMS Annual Report for Firestone Gravel Resource, DRMS Permit # M-1996-052, has been submitted online. Included with this letter are the attachments for the online DRMS Annual Report. The annual fee has been paid online with a credit card (\$791 + processing fees).

The attached **Firestone Gravel Resource Mining Plan Map** shows the various areas of mining and reclamation noted in the Annual Report. The mining map shows active mining areas, reclaimed areas (mining completed, sloping and re-vegetation done), future mining areas, processing plant, and settling ponds. Weeds are controlled with mowing and spraying throughout the growing seasons.

This past year, mining occurred in the same areas (Area 3, Area 5) as last year. In Area 3, mining is completed in the northern section, and we have backfilled and sloped the northern perimeter. In the next year, we plan to mine more of the eastern portion of Area 3, and also mine in Area 4 (the north-eastern phase of the site). As always, the rate of mining new areas depends on the market and natural conditions (depth and quality of the natural deposit, and weather).

Groundwater Monitoring Report - We are submitting groundwater monitoring data and calculations covering this past year's reporting period (August 2022 to July 2023). Analysis of the data showed that groundwater levels have remained in compliance with the baseline ranges, determined by comparing the current data's mon-to-mon-changes against the baseline data's mon-to-mon average change +/- 5-feet, as noted above. Therefore, there are no compliance issues. Also, one interior well (MW-12) was mined out in Nov-2022. Because MW-12 is interior to the mining operation, data from this well would only indicate groundwater level changes within the mining operation. There were no groundwater compliance issues throughout the reporting year.

If you have questions, feel free to contact me at 303-286-2247, or lmshults@lgeverist.com.

Sincerely,

Lynn Mayer Shults
Regulatory Manager


Attached:

- *Annual Report Map – mining and reclamation areas*
- *Ground Water Monitoring Report – data and map*

FIRESTONE GRAVEL RESOURCE

M-1996-052

DRMS Annual Report 2023

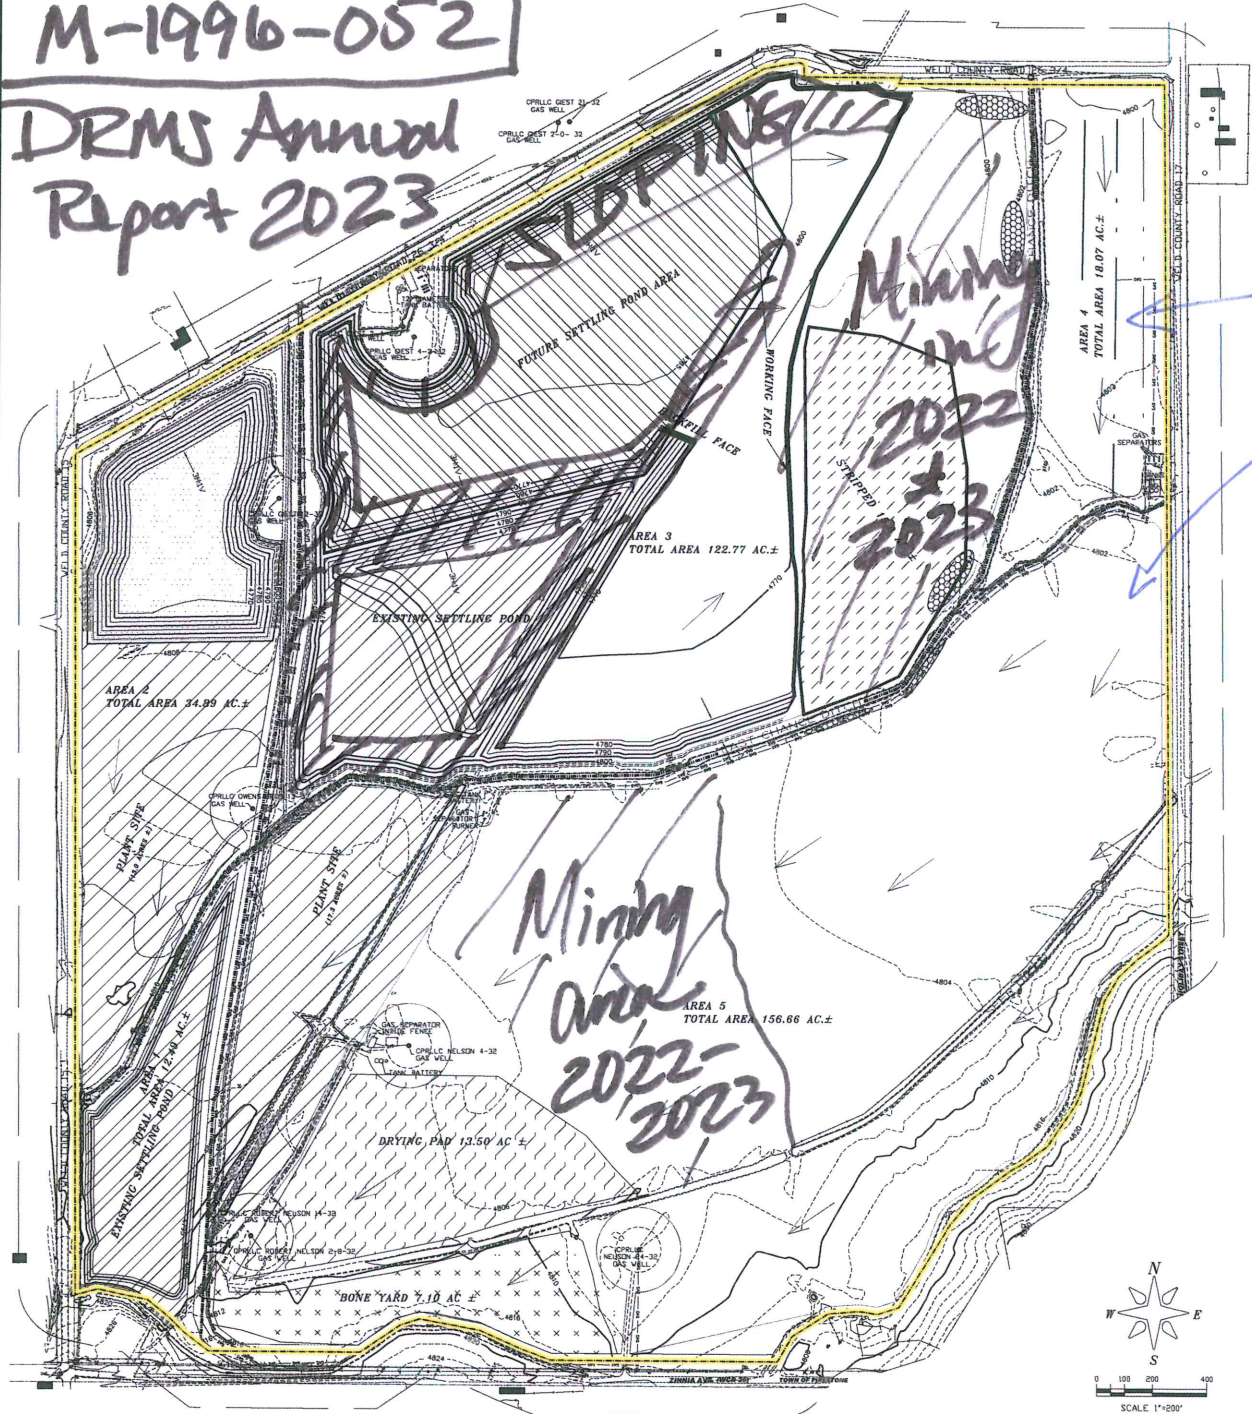

2023 to 2024

Sloping

LEGEND

PERMIT LINE/AFFECTED LANDS	PLANT SITE
AREA LINE	LAKE
200 FOOT	STRIPPED
DITCH	BONE YARD
ROADS	DRYING PAD / GROWTH MEDIUM STORAGE
PAVED ROAD	SETTLING POND
BURIED ELECTRIC	PROPOSED SETTLE POND
OVERHEAD COMMUNICATIONS	
OVERHEAD ELECTRIC	
FENCE	
GASLINE	
GAS/OIL WELL	
BUILDING	
TEMPORARY TOPSOIL PILE	
ESTIMATED DIRECTION OF MINING	

Parts of the SW1/4, NW1/4, NE1/4, SE1/4, SW1/4, NE1/4, SE1/4, NW1/4 and NW1/4, Sec 32, T-3-N, R-67-W of the 6th P.M., County Of Weld, State of Colorado

Map Exhibit C-1 - Mining Plan Map

PREPARED BY
ENVIRONMENT, INC.
7803 VANCE DR. # 205A
ARAPAHO, CO 80015
(303) 423-7951
environment@environmentinc.com

AMENDMENT
FOR
FIRESTONE GRAVEL RESOURCE
PERMIT # M-1996-052

DATE	DESCRIPTION	BY
1/27/2019	ORIGINAL PERMIT FILED	DWES (BOS)
1/27/2019	AMENDED TO ADD 274.04 AC. ±	LOC/AMC
8/23/2019	ADD 1000 PLANT LINE	LOC/AMC
3/7/2023	REVISED FLOOD PLANE LINE	LOC/AMC
1/28/2019	TECHNICAL REVISION - ADD SETTLING POND	LOC/AMC
8/14/2019	AMENDED TO ADD 539 AC. ±	LOC/AMC

L.G. Everist, Inc.
7321 EAST 88TH AVENUE | HENDERSON, COLORADO 80640
PHONE: (303) 287-4656 | FAX: (303) 289-1348

FILE NAME
FOR-C-1-MP
SCALE
1"=200'
DRAWN BY
M. W. HALL
CHECKED BY
M. W. HALL
INITIALS

L.G. Everist, Inc. - Firestone Gravel Resource (M-1996-052) - GROUNDWATER MONITORING REPORT

ELEVATION DATA Note: Elevations derived from the field depth measurements and the Elevation (TOC) of each MW.																
	exterior	interior	exterior	exterior	exterior	interior	exterior	interior	interior	interior	interior	interior	interior	exterior	exterior	exterior
MONITOR WELL NO.	MW-01	MW-02 (gone - Aug-2017)	MW-03	MW-04	MW-05	MW-06 (gone - Jun-2014)	MW-07	MW-09 (gone - Sep-2013)	MW-10 (gone - Jun-2021)	MW-11 (gone - Sep-2015)	MW-12 (gone - Nov-2022)	MW-13 (gone - Feb-2020)	MW-14 (gone - Feb-2020)	MW-15	MW-16	Accord's House
NORTHING, FT	1,307,909.50	1,309,751.93	1,312,173.59	1,309,691.51	1,308,177.33	1,308,132.31	1,311,086.36	1,308,703.68	1,308,922.41	1,309,498.47	1,309,482.41	1,311,896.53	1,311,760.15	1,307,645.42	1,307,795.67	1,311,737.65
EASTING, FT	3,162,454.93	3,163,486.50	3,165,870.74	3,165,916.29	3,165,934.69	3,162,338.25	3,162,480.59	3,162,729.80	3,163,085.25	3,163,226.77	3,163,363.55	3,164,613.07	3,164,646.53	3,164,713.64	3,163,414.26	3,164,677.66
ELEVATION (TOG), FT	4,810.13	4,806.39	4,799.87	4,802.43	4,836.24			4,805.05	4,804.48	4,805.02	4,804.59	4,797.56	4,797.23	4,818.59	4,815.48	4,799.75
CASING HEIGHT, FT	3.32	3.28	3.03	2.36	3.02			2.67	2.58	2.75	3.08	3.00	3.00	3.63	3.01	2.85
ELEVATION (TOC), FT	4,812.71	4,809.31	4,802.62	4,805.13	4,839.21	4,812.56	4,806.93	4,807.72	4,807.06	4,807.77	4,807.67	4,800.56	4,800.23	4,822.22	4,818.50	4,802.59

Groundwater Monitoring Calculations - 2022 and 2023 - to Determine Compliance with Baseline Monitoring

DRMS Annual Report - Aug-2023

data from 2022 and 2023

Groundwater Monitoring Plan - notes from Adequacy Response #2 (August-2010)

- Determining Compliance From AR-2, "LGE proposes implementing corrective actions when groundwater levels at exterior monitoring holes [see #3] have dropped 5 feet or more from the monthly average drop [see #4] established during monitoring [see #2]."
- Monitoring Period - Baseline monitoring period is 2006-2010, pre-LGE operations for wells MW-01 to MW-14. Baseline monitoring period for MW-15, MW-16, Accord - is Jun-2017 to May-2019.
- Exterior Monitoring Wells - are on the edges of the site, or off-site, and are **BOLDED**. Exterior wells are MW-01, MW-03, MW-04, MW-05, MW-07, and new wells - MW-15, MW-16, and Accord (house well).
- Mon-to-Mon Average Change +/- (baseline) to incorporate both drops and increases (formerly called "monthly average drop")
 - Mon-to-Mon Average Changes +/- (baseline) were calculated by using the each relevant month-to-month change over each of the baseline years.
 - 5-feet - added to the Mon-to-Mon Average Changes +/- (baseline) to get the Mon-to-Mon Average Changes +/- with 5-feet added (baseline).

Determining Compliance with Groundwater Monitoring Plan

- Using current data, calculate the "Month-to-Month Change" in groundwater levels using monthly data for each well.
- Month-to-Month Changes that are (=) or (<) the "Mon-to-Mon Average Change +/- with 5-feet Added (baseline)" are in compliance. If the changes are greater, they are out of compliance and in red / shaded

	exterior	interior	exterior	exterior	exterior	interior	exterior	interior	interior	interior	interior	interior	interior	exterior	exterior	exterior
2022 - Mon-to-Mon Change	MW-01	MW-02 (gone - Aug-2017)	MW-03	MW-04	MW-05	MW-06 (gone - Jun-2014)	MW-07	MW-09 (gone - Sep-2013)	MW-10 (gone - Jun-2021)	MW-11 (gone - Sep-2015)	MW-12 (gone - Nov-2022)	MW-13 (gone - Feb-2020)	MW-14 (gone - Feb-2020)	MW-15	MW-16	Accord's House
January-February	-0.03	gone	0.80	0.41	0.57	gone	0.06	gone	gone	gone	0.42	gone	gone	-0.15	0.49	-0.22
February-March	1.54	gone	-0.23	0.45	0.40	gone	0.25	gone	gone	gone	1.80	gone	gone	1.12	0.68	-0.29
March-April	0.42	gone	-1.72	0.71	0.33	gone	0.68	gone	gone	gone	0.16	gone	gone	0.72	0.66	0.02
April-May	-2.64	gone	-2.16	-0.01	-0.39	gone	-1.28	gone	gone	gone	-1.15	gone	gone	-2.46	-2.35	-1.04
May-June	-0.04	gone	1.55	0.17	-2.85	gone	-0.63	gone	gone	gone	0.85	gone	gone	-1.04	-0.47	-0.38
June-July	-0.75	gone	-1.77	0.07	1.59	gone	-1.02	gone	gone	gone	-1.66	gone	gone	-1.86	-0.73	0.81
July-August	-0.99	gone	1.49	0.07	-0.49	gone	0.04	gone	gone	gone	2.09	gone	gone	-0.72	-1.25	0.23
August-September	0.96	gone	0.28	-0.04	-0.17	gone	1.95	gone	gone	gone	0.42	gone	gone	0.96	1.09	0.18
September-October	0.61	gone	2.08	0.06	-0.94	gone	0.80	gone	gone	gone	-0.07	gone	gone	0.21	0.44	1.16
October-November	0.56	gone	1.89	0.21	0.83	gone	0.15	gone	gone	gone	---	gone	gone	1.25	0.60	1.33
November-December	0.56	gone	1.90	0.20	0.90	gone	0.15	gone	gone	gone	destroyed,	gone	gone	1.25	0.59	1.28
December-January	0.30	gone	0.60	1.35	0.30	gone	0.00	gone	gone	gone	mined through	gone	gone	0.50	0.40	-3.50

	exterior	interior	exterior	exterior	exterior	interior	exterior	interior	interior	interior	interior	interior	interior	exterior	exterior	exterior
2023 - Mon-to-Mon Change	MW-01	MW-02 (gone - Aug-2017)	MW-03	MW-04	MW-05	MW-06 (gone - Jun-2014)	MW-07	MW-09 (gone - Sep-2013)	MW-10 (gone - Jun-2021)	MW-11 (gone - Sep-2015)	MW-12 (gone - Nov-2022)	MW-13 (gone - Feb-2020)	MW-14 (gone - Feb-2020)	MW-15	MW-16	Accord's House
January-February	0.15	gone	2.30	1.50	0.50	gone	-0.10	gone	gone	gone	gone	gone	gone	0.50	0.40	-1.50
February-March	0.25	gone	1.25	0.95	0.50	gone	-0.10	gone	gone	gone	gone	gone	gone	0.70	0.30	-1.60
March-April	0.55	gone	-4.45	1.25	0.35	gone	-0.10	gone	gone	gone	gone	gone	gone	0.70	0.80	-3.60
April-May	-0.70	gone	-2.50	-0.15	1.25	gone	-1.30	gone	gone	gone	gone	gone	gone	-0.72	-0.82	-4.75
May-June	-0.70	gone	-2.50	-0.15	1.25	gone	-1.30	gone	gone	gone	gone	gone	gone	-0.73	-0.83	-4.75
June-July	-2.45	gone	-4.85	0.15	-3.60	gone	0.15	gone	gone	gone	gone	gone	gone	-3.15	-2.30	2.10
July-August																
August-September																
September-October																
October-November																
November-December																
December-January																

DRMS Annual Report 2023 - Groundwater Monitoring Report & Well Map

We are submitting groundwater monitoring data and calculations covering this past year's reporting (2022 - 2023). Analysis of the data showed that groundwater levels have remained in compliance with the baseline ranges, determined by comparing the current data's mon-to-mon-changes against the baseline data's mon-to-mon average change +/- 5-feet, as noted above. Therefore, there are no compliance issues. Also, one interior well (MW-12) was mined out in Nov-2022.

L.G. Everist, Inc. - Firestone Gravel Resource (M-1996-052) - GROUNDWATER MONITORING REPORT

ELEVATION DATA Note: Elevations derived from the field depth measurements and the Elevation (TOC) of each MW.																
	exterior	interior	exterior	exterior	exterior	interior	exterior	interior	interior	interior	interior	interior	interior	exterior	exterior	exterior
MONITOR WELL NO.	MW-01	MW-02 (gone - Aug-2017)	MW-03	MW-04	MW-05	MW-06 (gone - Jun-2014)	MW-07	MW-09 (gone - Sep-2013)	MW-10 (gone - Jun-2021)	MW-11 (gone - Sep-2015)	MW-12 (gone - Nov-2022)	MW-13 (gone - Feb-2020)	MW-14 (gone - Feb-2020)	MW-15	MW-16	Accord's House
NORTHING, FT	1,307,909.50	1,309,751.93	1,312,173.59	1,309,691.51	1,308,177.33	1,308,132.31	1,311,086.36	1,308,703.68	1,308,922.41	1,309,498.47	1,309,482.41	1,311,896.53	1,311,760.15	1,307,645.42	1,307,795.67	1,311,737.65
EASTING, FT	3,162,454.93	3,163,486.50	3,165,870.74	3,165,916.29	3,165,934.69	3,162,338.25	3,162,480.59	3,162,729.80	3,163,085.25	3,163,226.77	3,163,363.55	3,164,613.07	3,164,646.53	3,164,713.64	3,163,414.26	3,164,677.66
ELEVATION (TOG), FT	4,810.13	4,806.39	4,799.87	4,802.43	4,836.24			4,805.05	4,804.48	4,805.02	4,804.59	4,797.56	4,797.23	4,818.59	4,815.48	4,799.75
CASING HEIGHT, FT	3.32	3.28	3.03	2.36	3.02			2.67	2.58	2.75	3.08	3.00	3.00	3.63	3.01	2.85
ELEVATION (TOC), FT	4,812.71	4,809.31	4,802.62	4,805.13	4,839.21	4,812.56	4,806.93	4,807.72	4,807.06	4,807.77	4,807.67	4,800.56	4,800.23	4,822.22	4,818.50	4,802.59

Groundwater Monitoring - Baseline Data and Ranges NOTE: Baseline monitoring period for MW-01 to MW-14 is 2006-2010 (pre-LGE operations).														Baseline period for MW-15, -16, Accord's is Jun-2017 to May-2019.		
	exterior	interior	exterior	exterior	exterior	interior	exterior	interior	interior	interior	interior	interior	interior	exterior	exterior	exterior
MONITOR WELL NO.	MW-01	MW-02 (gone - Aug-2017)	MW-03	MW-04	MW-05	MW-06 (gone - Jun-2014)	MW-07	MW-09 (gone - Sep-2013)	MW-10 (gone - Jun-2021)	MW-11 (gone - Sep-2015)	MW-12 (gone - Nov-2022)	MW-13 (gone - Feb-2020)	MW-14 (gone - Feb-2020)	MW-15	MW-16	Accord's House
ANNUAL - Average Elevation	4,805.17	4,800.50	4,795.21	4,799.92	4,808.53	4,804.81	4,796.20	4,802.14	4,801.77	4,801.39	4,801.01	4,795.29	4,795.27	4,808.51	4,805.98	4,777.07
Highest Elevation (bolded above)	4,808.31	4,804.69	4,798.75	4,801.56	4,810.77	4,807.11	4,798.00	4,803.42	4,804.66	4,804.85	4,804.22	4,797.96	4,795.92	4,805.77	4,807.80	4,784.19
Lowest Elevation (bolded above)	4,802.29	4,797.81	4,792.37	4,798.13	4,805.94	4,802.11	4,794.49	4,800.27	4,799.72	4,798.57	4,798.74	4,793.99	4,794.28	4,810.42	4,804.00	4,772.89
Max Change (= High - Low)	6.02	6.88	6.38	3.43	4.83	5.00	3.51	3.15	4.94	6.28	5.48	3.97	1.64	-4.65	3.80	11.30

Mon-to-Mon Average Elevation (baseline) NOTE: Calculated from Elevation Data for each month in baseline period of 2006-2010.														new wells in 2021 rpt		
January	4,803.55	4,798.90	4,793.67	4,799.35	4,808.38	4,804.41	4,795.66	4,802.12	4,801.58	4,800.62	4,800.67	4,794.86	4,795.13	4,807.37	4,805.10	4,776.14
February	4,803.56	4,798.83	4,793.48	4,799.16	4,807.82	4,803.63	4,795.53	4,801.21	4,800.57	4,799.49	4,799.62	4,794.41	4,794.77	4,806.67	4,804.82	4,775.79
March	4,803.50	4,798.90	4,793.86	4,799.22	4,807.38	4,802.98	4,795.06	4,801.21	4,800.60	4,799.46	4,799.61	4,794.49	4,794.81	4,806.37	4,804.62	4,774.84
April	4,803.30	4,798.69	4,793.68	4,798.99	4,806.96	4,802.88	4,795.02	4,801.07	4,800.53	4,799.46	4,799.61	4,794.55	4,794.86	4,807.17	4,804.52	4,774.84
May	4,804.32	4,800.46	4,794.57	4,799.69	4,807.07	4,804.12	4,795.85	4,802.68	4,802.33	4,801.60	4,801.81	4,795.54	4,795.91	4,806.99	4,806.17	4,775.34
June	4,805.59	4,801.67	4,795.35	4,800.28	4,807.35	4,804.84	4,796.33	4,802.65	4,802.21	4,801.89	4,802.06	4,795.87	4,795.74	4,808.19	4,806.40	4,779.89
July	4,806.58	4,802.53	4,797.88	4,801.05	4,808.29	4,806.45	4,796.97	4,803.42	4,802.86	4,803.44	4,802.54	4,796.46	4,795.56	4,809.29	4,806.87	4,778.02
August	4,807.95	4,803.90	4,798.01	4,801.11	4,809.38	4,807.11	4,797.94	-	-	4,804.56	-	-	-	4,811.32	4,807.40	4,782.49
September	4,807.23	4,802.80	4,797.98	4,800.63	4,809.87	4,806.68	4,797.30	-	4,804.66	4,804.29	4,804.22	4,797.96	-	4,811.59	4,807.60	4,781.29
October	4,806.27	4,800.59	4,795.34	4,800.07	4,809.96	4,805.63	4,796.27	4,802.95	4,802.50	4,801.60	4,801.63	4,795.40	4,795.65	4,809.74	4,806.77	4,775.67
November	4,805.18	4,799.75	4,794.56	4,799.93	4,809.59	4,804.91	4,796.02	4,802.53	4,801.93	4,800.79	4,800.89	4,795.24	4,795.03	4,809.14	4,805.82	4,775.17
December	4,804.64	4,799.43	4,794.36	4,799.79	4,809.11	4,804.45	4,795.82	4,802.23	4,801.65	4,800.57	4,800.69	4,795.19	4,795.31	4,808.34	4,805.60	4,775.37

Mon-to-Mon Average Change +/- (baseline) NOTE: Calculated with ABSOLUTE VALUES during the baseline period of 2006-2010, so the Average Change is for both (+) and (-).														new wells in 2021 rpt		
January-February	0.36	0.26	0.19	0.19	0.56	0.39	0.06	0.20	0.24	0.33	0.30	0.05	0.04	0.70	0.27	0.40
February-March	0.19	0.17	0.49	0.14	0.44	0.09	0.00	0.03	0.02	0.03	0.01	0.03	0.07	0.30	0.20	0.95
March-April	0.26	0.43	0.32	0.27	0.42	0.28	0.05	0.34	0.35	0.42	0.43	0.24	0.19	0.90	0.15	0.65
April-May	0.62	1.19	0.44	0.47	0.17	1.24	0.83	1.61	1.80	2.14	2.20	0.98	1.05	1.78	1.65	0.55
May-June	1.01	1.47	0.42	0.53	0.31	0.72	0.48	0.10	0.44	1.09	1.30	0.34	0.17	1.45	0.60	2.00
June-July	1.77	0.86	2.54	0.48	0.75	1.61	0.64	0.32	0.34	1.55	0.55	0.45	0.17	1.10	0.57	2.72
July-August	1.38	1.51	0.35	0.08	0.78	0.09	0.97	0.00	0.00	1.18	0.00	0.00	0.00	2.03	0.53	4.48
August-September	0.72	1.51	0.21	0.55	0.48	0.08	0.64	0.00	0.00	0.28	0.00	0.00	0.00	0.32	0.20	1.20
September-October	0.81	2.05	2.59	0.86	0.14	1.05	1.03	0.00	1.20	1.49	1.44	1.23	0.00	1.85	0.82	5.63
October-November	1.19	0.98	0.81	0.30	0.42	0.72	0.25	0.41	0.57	0.81	0.75	0.16	0.62	0.60	0.95	0.95
November-December	0.52	0.35	0.31	0.18	0.43	0.46	0.20	0.30	0.28	0.22	0.20	0.12	0.28	0.80	0.23	1.05
December-January	0.51	0.39	0.42	0.38	0.63	0.31	0.23	0.23	0.24	0.22	0.24	0.36	0.34	0.97	0.50	1.32

Mon-to-Mon Average Change +/- with 5-feet Added (baseline) NOTE: For compliance, FUTURE mon-to-mon MW changes must stay within the Mon-to-Mon Average Changes (+/-5).														new wells in 2021 rpt		
January-February	5.36	5.26	5.19	5.19	5.56	5.39	5.06	5.20	5.24	5.33	5.30	5.05	5.04	5.70	5.27	5.40
February-March	5.19	5.17	5.49	5.14	5.44	5.09	5.00	5.03	5.02	5.03	5.01	5.03	5.07	5.30	5.20	5.95
March-April	5.26	5.43	5.32	5.27	5.42	5.28	5.05	5.34	5.35	5.42	5.43	5.24	5.19	5.90	5.15	5.65
April-May	5.62	6.19	5.44	5.47	5.17	6.24	5.83	6.61	6.80	7.14	7.20	5.98	6.05	6.78	6.65	5.55
May-June	6.01	6.47	5.42	5.53	5.31	5.72	5.48	5.10	5.44	6.09	6.30	5.34	5.17	6.45	5.60	7.00
June-July	6.77	5.86	7.54	5.48	5.75	6.61	5.64	5.32	5.34	6.55	5.55	5.45	5.17	6.10	5.57	7.72
July-August	6.38	6.51	5.35	5.08	5.78	5.09	5.97	5.00	5.00	6.18	5.00	5.00	5.00	7.03	5.53	9.48
August-September	5.72	6.51	5.21	5.55	5.48	5.08	5.64	5.00	5.00	5.28	5.00	5.00	5.00	5.32	5.20	6.20
September-October	5.81	7.05	7.59	5.86	5.14	6.05	6.03	5.00	6.20	6.49	6.44	6.23	5.00	6.85	5.82	10.63
October-November	6.19	5.98	5.81	5.30	5.42	5.72	5.25	5.41	5.57	5.81	5.75	5.16	5.62	5.60	5.95	5.95
November-December	5.52	5.35	5.31	5.18	5.43	5.46	5.20	5.30	5.28	5.22	5.20	5.12	5.28	5.80	5.23	6.05
December-January	5.51	5.39	5.42	5.38	5.63	5.31	5.23	5.23	5.24	5.22	5.24	5.36	5.34	5.97	5.50	6.32

L.G. Everist, Inc. - Firestone Gravel Resource (M-1996-052) - GROUNDWATER MONITORING REPORT

ELEVATION DATA																
Note: Elevations derived from the field depth measurements and the Elevation (TOC) of each MW.																
	exterior	interior	exterior	exterior	exterior	interior	exterior	interior	interior	interior	interior	interior	interior	exterior	exterior	exterior
MONITOR WELL NO.	MW-01	MW-02 (gone - Aug-2017)	MW-03	MW-04	MW-05	MW-06 (gone - Jun-2014)	MW-07	MW-09 (gone - Sep-2013)	MW-10 (gone - Jun-2021)	MW-11 (gone - Sep-2015)	MW-12 (gone - Nov-2022)	MW-13 (gone - Feb-2020)	MW-14 (gone - Feb-2020)	MW-15	MW-16	Accord's House
NORTHING, FT	1,307,909.50	1,309,751.93	1,312,173.59	1,309,691.51	1,308,177.33	1,308,132.31	1,311,086.36	1,308,703.68	1,308,922.41	1,309,498.47	1,309,482.41	1,311,896.53	1,311,760.15	1,307,645.42	1,307,795.67	1,311,737.65
EASTING, FT	3,162,454.93	3,163,486.50	3,165,870.74	3,165,916.29	3,165,934.69	3,162,338.25	3,162,480.59	3,162,729.80	3,163,085.25	3,163,226.77	3,163,363.55	3,164,613.07	3,164,646.53	3,164,713.64	3,163,414.26	3,164,677.66
ELEVATION (TOG), FT	4,810.13	4,806.39	4,799.87	4,802.43	4,836.24			4,805.05	4,804.48	4,805.02	4,804.59	4,797.56	4,797.23	4,818.59	4,815.48	4,799.75
CASING HEIGHT, FT	3.32	3.28	3.03	2.36	3.02			2.67	2.58	2.75	3.08	3.00	3.00	3.63	3.01	2.85
ELEVATION (TOC), FT	4,812.71	4,809.31	4,802.62	4,805.13	4,839.21	4,812.56	4,806.93	4,807.72	4,807.06	4,807.77	4,807.67	4,800.56	4,800.23	4,822.22	4,818.50	4,802.59

01/28/22	4,804.76	gone	4,774.23	4,794.18	4,807.29	gone	4,795.08	gone	gone	gone	4,793.24	gone	gone	4,805.40	4,803.85	4,775.17
02/27/22	4,804.79	-	4,773.43	4,793.77	4,806.72	-	4,795.02	-	-	-	4,792.82	-	-	4,805.55	4,803.36	4,775.39
03/24/22	4,803.25	-	4,773.66	4,793.32	4,806.32	-	4,794.77	-	-	-	4,791.02	-	-	4,804.43	4,802.68	4,775.68
04/26/22	4,802.83	-	4,775.38	4,792.61	4,805.99	-	4,794.09	-	-	-	4,790.86	-	-	4,803.71	4,802.02	4,775.66
05/18/22	4,805.47	-	4,777.54	4,792.62	4,806.38	-	4,795.37	-	-	-	4,792.01	-	-	4,806.17	4,804.37	4,776.70
06/20/22	4,805.51	-	4,775.99	4,792.45	4,809.23	-	4,796.00	-	-	-	4,791.16	-	-	4,807.21	4,804.84	4,777.08
07/20/22	4,806.26	-	4,777.76	4,792.38	4,807.64	-	4,797.02	-	-	-	4,792.82	-	-	4,809.07	4,805.57	4,776.27
08/30/22	4,807.25	-	4,776.27	4,792.31	4,808.13	-	4,796.98	-	-	-	4,790.73	-	-	4,809.79	4,806.82	4,776.04
09/30/22	4,806.29	-	4,775.99	4,792.35	4,808.30	-	4,795.03	-	-	-	4,790.31	-	-	4,808.83	4,805.73	4,775.86
10/24/22	4,805.68	-	4,773.91	4,792.29	4,809.24	-	4,794.23	-	-	-	4,790.38	-	-	4,808.62	4,805.29	4,774.70
11/22/22	4,805.12	-	4,772.02	4,792.08	4,808.41	-	4,794.08	-	-	-	destroyed,	-	-	4,807.37	4,804.69	4,773.37
12/20/22	4,804.56	-	4,770.12	4,791.88	4,807.51	-	4,793.93	-	-	-	mined through	-	-	4,806.12	4,804.10	4,772.09
01/11/23	4,804.26	gone - 2017	4,769.52	4,790.53	4,807.21	gone - 2014	4,793.93	gone - 2013	gone - 2021	gone - 2015	gone - 2022	gone - 2020	gone - 2020	4,805.62	4,803.70	4,775.59
02/24/23	4,804.11	-	4,767.22	4,789.03	4,806.71	-	4,794.03	-	-	-	-	-	-	4,805.12	4,803.30	4,777.09
03/22/23	4,803.86	-	4,765.97	4,788.08	4,806.21	-	4,794.13	-	-	-	-	-	-	4,804.42	4,803.00	4,778.69
04/28/23	4,803.31	-	4,770.42	4,786.83	4,805.86	-	4,794.23	-	-	-	-	-	-	4,803.72	4,802.20	4,782.29
05/15/23	4,804.01	-	4,772.92	4,786.98	4,804.61	-	4,795.53	-	-	-	-	-	-	4,804.44	4,803.02	4,787.04
06/22/23	4,804.71	-	4,775.42	4,787.13	4,803.36	-	4,796.83	-	-	-	-	-	-	4,805.17	4,803.85	4,791.79
07/18/23	4,807.16	-	4,780.27	4,786.98	4,806.96	-	4,796.68	-	-	-	-	-	-	4,808.32	4,806.15	4,789.69



- **MEASURED WELLS**
- **DESTROYED/NOT MEASURED WELLS**

FIRESTONE MONITORING WELL LOCATIONS		AMK	
		SCALE	NTS
		DATE	11/03/2022
	L. G. EVERIST, INC. <i>We Deliver Solutions!</i> FIRESTONE, CO	DRAWING NO.	REV.
		L01	-