SWEPI LP Well: HW-8110

Executive Summary

Purpose: Evaluate the cement bond in the well HW-8110.

Solution Methodology: Survey the casing with Isolation Scanner and CBL-VDL Tools

<u>General</u>: The well HW-8110 is a heater well and has a 7-5/8", 26.4# casing from surface to 2128ft. CBL-VDL and Isolation Scanner Logs were run from 2128ft to surface. A combined CBL-VDL and Isolation Scanner presentation is in this report.

During the drilling stages, one cement plug was needed in the well to prevent loss circulation to ensure a quality cement job for the 7-5/8" casing.

The Schlumberger's Isolation Scanner cement evaluation service provides more certainty for light weight cements by combining the pulse-echo technique with a new ultrasonic technique that induces a flexural wave in the casing with a transmitter and measures the resulting signal at two receivers. The attenuation calculated between the two receivers provides an independent response that is paired with the pulse echo measurement and compared with a laboratory — measured database to produce an image of the material behind the casing. By measuring radially beyond traditional cement evaluation boundaries, Isolation Scanner service confirms zonal isolation.

This well has been cemented using light lead slurry of 9.5ppg followed with tail slurry of 15.5ppg in order to mitigate possible lost circulation during cementing operations. Both the conventional CBL-VDL and ultra sonic pulse-echo techniques rely on a significant contrast in acoustic impedance between the cement and the displaced drilling mud to determine whether or not: a) there is cement behind the casing rather than drilling mud and b) the cement is bonded to the casing and the formation. Due to the use of light weight cement in this well which results in lower contrast, the conventional CBL-VDL and ultra sonic pulse-echo techniques have to be supported with the Schlumberger's Isolation Scanner tool.

<u>Summary of Findings</u>: The Isolation Scanner Log from the raw curve measurements and all the images indicate Top of Cement (TOC) at 318ft.

Three different zones of cement bond log quality can be seen from the analysis as follows:


Zone 1 - 1540ft – 2128ft: The flexural image map indicates cement is present in the annulus behind the casing and that casing is bonded. Adequate isolation exists. This is the tail cement at 15.5ppg. Top of tail cement is also supported by the VDL formation signal.

Zone 2 - : 318ft – 1540ft: The flexural image map indicates that adequate cement for isolation exists. There are some local channels with microdebonding cement in certain intervals as seen on the image map. Overall the cement condition is fair to good bonding.

Zone 3 - : Surface – 318ft: The flexural image indicates the Top of Cement (TOC) at 318ft. Above this depth there is liquid filled annulus with poor cement coverage to 213ft. Above 213ft, there is air in the annulus.

SWEPI LP Well: HW-8110

<u>Conclusions</u>: The Isolation Scanner Cement Bond Analysis indicates that cement bond is present in the annulus behind the casing. Adequate bonding exists to isolate the production zone and the saline water interval from the overlying water bearing intervals. The Top of Cement (TOC) is at 318ft.

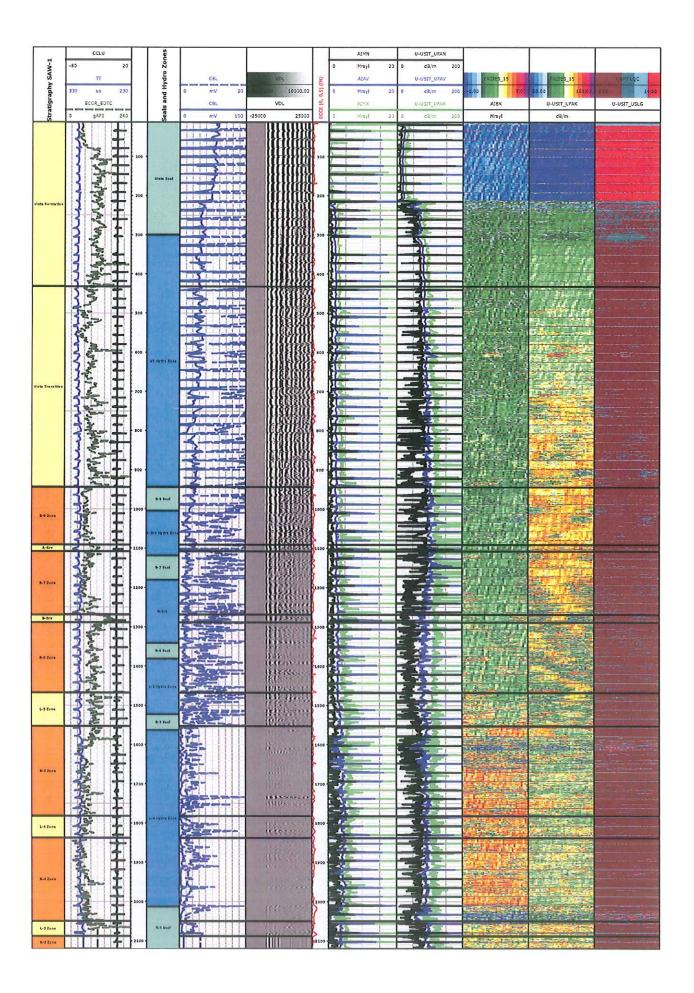

SAW1 Well Stratigraphy with well 8110 Borehole Cement Plug Data 13 Sep 2012

Depth, ft.	Stratigraphy R/L Zones	Seals and Hydro Zones	Gamma 0 api 240	Well 8110 Borehole (BH) Cement Plugs	BH Plug Seal*	8110 Drill Losses	Comments
-		Uinta Seal		Placed Tagged Note: BH cement plugs placed with base at then current BH depth			*: Good interval for BH cement plug base Casing Installation: Cement to surface (most of excess) Circulated w/air and gel mud (~8-9 ppg w/~0-15 ppb LCM)
700	Uinta Transition	UT Hydro Zone	The state of the s				~1050ft MD: 15 min ECD test: ~25 bph loss; Similar test (990ft MD) after cement plug 1: ~5 bph loss (362 gpm).
1400 -	R-8 Zone 1091 A-Gry 1108 1140, MB R-7 Zone 1269 1289 1351, HD R-6 Zone 1468	A-Grv Hydro Zone 1189 R-7 Seal B-Grv Hydro Zone 1341 1381R-6 Seal L-5 Hydro Zone	Continue of the second of the	1			~1250ft MD: ECD test: ~5 bph loss ~1553ft MD: ECD test: ~224 bph loss; increased LCM to 15 ppb
1700 - 1800 - 19	D 47	1523 1563R-5 Seal L-4 Hydro Zone 1839.0, TOSN		Circulated mud periodically during casing installation and before cementing			~1753ft MD: ~415 gpm 15 min ECD test (before plug): ~30 bph loss; Similar test after cement plug 1: 24 bph loss (354 gpm). ~1833ft MD ~15 bph loss (~10-15 ppb LCM
2100 - 2200 - 2300 - 2400 - 2400	2088 R-3 Zone 2238 L-2 Zone	R-4 Seal 2185.2 - 2193.3, Greena Red 2257.1 - 2254.1, TI Bed	ICP	Significant pressure responses observed in A; Slight pressure response in B, L5 and L4 wells at 138 pad			~1933ft MD: ~ 430 gpm 15 min ECD test: ~5 bph loss ~2285ft MD: ECD test: 413 gpm; ~ 0 bph loss;