





Water Plan Grant Application

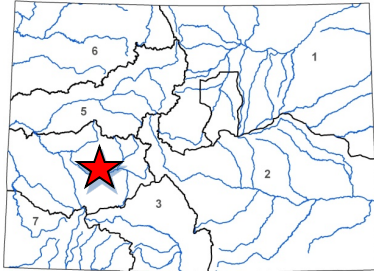

L O C A T I O N	
County/Countries:	Gunnison and Saguache
Drainage Basin:	Gunnison

D E T A I L S	
Total Project Cost:	\$374,570
Water Plan Grant Request:	\$137,170
Recommended amount:	\$137,170
Other CWCB Funding:	\$0
Other Funding Amount:	\$239,400
Applicant Match:	\$239,400
Project Type(s):	Construction and implementation
Project Category(Categories):	Environmental and Recreation
Measurable Result:	7500 linear feet of restored stream, 10 acres of restored habitat, 200 AF/Yr in efficiency savings

Trout Unlimited (TU) staff will work with landowners in the Tomichi Creek and Cebolla Creek watersheds to restore instream and riparian habitat, improve irrigation water management, improve watershed health, and drought resiliency. Tomichi Creek and Cebolla Creek are both headwater tributaries to the Upper Gunnison River. The proposed restoration activities will improve instream habitat and riparian health by reducing erosion, increasing vegetative cover on stream banks, reconnecting/re-establishing floodplains, to increase adjacent ground water levels. Restoration prescriptions will differ to suit specific land uses and management goals. Low-tech processed based restoration methods and grazing management will be used on the Cebolla Creek site and more traditional bank and channel stabilization technics used at the Tomichi site. Both locations will include irrigation water control improvements that are expected to improve irrigation water management, wetlands, and stream flows.

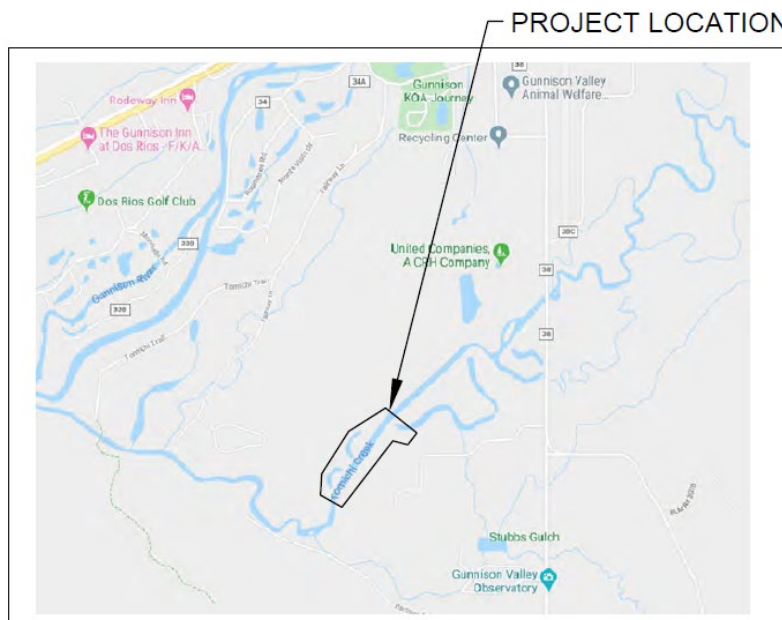

Project partners include private landowners, the National Resource Conservation Service (NRCS), USFWS Partners for Fish and Wildlife (PFW), Colorado Parks and Wildlife (CPW), and the Upper Gunnison River Water Conservancy District.

**COLORADO**Colorado Water
Conservation Board

Department of Natural Resources

Colorado Water Conservation Board

Water Plan**Water Project Summary**

Name of Applicant	Trout Unlimited_Denver
Name of Water Project	Project-01886 - Upper Gunnison Stream Restoration
Grant Request Amount	\$137,170.00
Primary Category	\$137,170.00
<i>Watershed Restoration & Recreation</i>	
Additional Funding Category	
<i>Watershed Restoration & Recreation</i>	
Total Applicant Match	\$239,400.00
<i>Applicant Cash Match</i>	\$230,400.00
<i>Applicant In-Kind Match</i>	\$9,000.00
Total Other Sources of Funding	\$239,400.00
<i>NRCS</i>	\$160,000.00
<i>Partners for Fish and Wildlife</i>	\$30,000.00
<i>UGRWCD</i>	\$15,000.00
<i>L&P Ranch</i>	\$7,000.00
<i>UGRWCD</i>	\$15,400.00
<i>Trout Unlimited</i>	\$10,000.00
<i>Trout Unlimited</i>	\$2,000.00
Total Project Cost	\$615,970.00

Applicant & Grantee Information

Name of Grantee: Trout Unlimited_Denver
Mailing Address: 2032 Ivanhoe St. Denver CO 80207
FEIN: 381,612,715

Organization Contact: Danielle Typinski
Position/Title: Grant Compliance Coordinator Email: danielle.typinski@tu.org
Phone: 7032849429

Grant Management Contact: Danielle Typinski
Position/Title: Grant Compliance Coordinator Email: danielle.typinski@tu.org
Phone: 7032849429

Grant Management Contact - Alternate: Jesse Kruthaupt
Position/Title: Email: jesse.kruthaupt@tu.org
Phone: 970-209-0976

Description of Grantee/Applicant

No description provided

Type of Eligible Entity

- ☐ Public (Government)
- ☐ Public (District)
- ☐ Public (Municipality)
- ☐ Ditch Company
- ☐ Private Incorporated
- ☐ Private Individual, Partnership, or Sole Proprietor
- ☒ Non-governmental Organization
- ☐ Covered Entity
- ☐ Other

Category of Water Project

- ☐ Agricultural Projects
Developing communications materials that specifically work with and educate the agricultural community on headwater restoration, identifying the state of the science of this type of work to assist agricultural users among others.
- ☐ Conservation & Land Use Planning
Activities and projects that implement long-term strategies for conservation, land use, and drought planning.
- ☐ Engagement & Innovation Activities
Activities and projects that support water education, outreach, and innovation efforts. Please fill out the Supplemental Application on the website.
- ☒ Watershed Restoration & Recreation
Projects that promote watershed health, environmental health, and recreation.
- ☐ Water Storage & Supply
Projects that facilitate the development of additional storage, artificial aquifer recharge, and dredging existing reservoirs to restore the reservoirs' full decreed capacity and Multi-beneficial projects and those projects identified in basin implementation plans to address the water supply and demand gap.

Location of Water Project

Latitude 38.538175
 Longitude -106.942911
 Lat Long Flag Default/Proponent headquarters: If the location cannot be defined with flags above, use location of project proponent headquarters
 Water Source Tomichi Creek, Cebolla Creek
 Basins Gunnison
 Counties Saguache; Gunnison
 Districts 28-Tomichi Creek; 62-Upper Gunnison River

Water Project Overview

Major Water Use Type Environmental
 Subcategory Construction
 Scheduled Start Date - Design 5/1/2022
 Scheduled Start Date - Construction 5/1/2022
 Description
 Trout Unlimited (TU) staff will work with landowners in the Tomichi Creek and Cebolla Creek watersheds to restore instream and riparian habitat, improve irrigation water management, improve watershed health, and

drought resiliency. Tomichi Creek and Cebolla Creek are both headwater tributaries to the Upper Gunnison River.

The proposed restoration activities will improve instream habitat and riparian health by reducing erosion, increasing vegetative cover on stream banks, reconnecting/re-establishing floodplains, to increase adjacent ground water levels. Restoration prescriptions will differ to suit specific land uses and management goals. Low-tech processed based restoration methods and grazing management will be used on the Cebolla Creek site and more traditional bank and channel stabilization technics used at the Tomichi site. Both locations will include irrigation water control improvements that are expected to improve irrigation water management, wetlands, and stream flows.

Project partners include private landowners, the National Resource Conservation Service (NRCS), USFWS Partners for Fish and Wildlife (PFW), Colorado Parks and Wildlife (CPW), and the Upper Gunnison River Water Conservancy District.

Funding from the CWCB Water Plan Grant will be used for, labor, excavation and materials. The two participating landowners are under contract with the NRCS and have utilized NRCS staff for restoration design and planning.

Measurable Results	
	New Storage Created (acre-feet)
	New Annual Water Supplies Developed or Conserved (acre-feet), Consumptive or Nonconsumptive
	Existing Storage Preserved or Enhanced (acre-feet)
	New Storage Created (acre-feet)
7,500	Length of Stream Restored or Protected (linear feet)
	Efficiency Savings (dollars/year)
200	Efficiency Savings (acre-feet/year)
10	Area of Restored or Preserved Habitat (acres)
	Quantity of Water Shared through Alternative Transfer Mechanisms or water sharing agreement (acre-feet)
	Number of Coloradans Impacted by Incorporating Water-Saving Actions into Land Use Planning
	Number of Coloradans Impacted by Engagement Activity

Water Project Justification
<p>This project will improve watershed health and cold water trout habitat.</p> <p>This project will help meet the following 3 of the goals listed in the Gunnison BIP, pp 30-31.</p> <p>Primary Goal:</p> <p>1. Protect existing uses: The infrastructure and habitat improvements planned will protect and improve environmental, and agricultural uses on properties located on headwater tributaries to the Gunnison River.</p> <p>Complementary Goals</p> <p>6. Maintain or, where necessary, improve water quality throughout the Gunnison Basin: The proposed in-channel improvements will reduce erosion and improve channel stability, eroded banks near the structures will recover and riparian vegetation established. Over time, it is expected that stream channels will transform to a narrower deeper profile leading to lower water temperatures and providing better refuge for trout.</p> <p>The Colorado Water Plan Water Plan frequently references collaboration and multiple use projects. In section</p>

6.6, page 6-157, the third goal listed is “Support the development of multipurpose projects and methods that benefit environmental and recreational water needs as well as water needs for communities or agriculture”. This project will involve coordination between NGO’s, private land owners, federal and local agencies to address environmental, recreational, and agricultural water needs.

On page 1-6 of the Colorado Water plan sites three core water values. The second value is “Efficient and effective water infrastructure promoting smart land use.” This project will upgrade ranch infrastructure and demonstrate how irrigation water management and wetland enhancement can be used to manage healthy riverine ecosystems and productive agriculture.

Related Studies

Upper Gunnison Integrated Water Management Planning
Tomichi Creek Riparian Assessment

Taxpayer Bill of Rights

None

Budget and Schedule

This Statement of Work shall be accompanied by a combined Budget and Schedule that reflects the Tasks identified in the Statement of Work and shall be submitted to CWCB in excel format.

Reporting Requirements

Progress Reports: The applicant shall provide the CWCB a progress report every 6 months, beginning from the date of issuance of a purchase order, or the execution of a contract. The progress report shall describe the status of the tasks identified in the statement of work, including a description of any major issues that have occurred and any corrective action taken to address these issues.

Final Report: At completion of the project, the applicant shall provide the CWCB a Final Report on the applicant's letterhead that: (1) Summarizes the project and how the project was completed. (2) Describes any obstacles encountered, and how these obstacles were overcome. (3) Confirms that all matching commitments have been fulfilled. (4) Includes photographs, summaries of meetings and engineering reports/designs. The CWCB will pay out the last 10% of the budget when the Final Report is completed to the satisfaction of CWCB staff. Once the Final Report has been accepted, and final payment has been issued, the purchase order or grant will be closed without any further payment.

Payment

Payment will be made based on actual expenditures and must include invoices for all work completed. The request for payment must include a description of the work accomplished by task, an estimate of the percent completion for individual tasks and the entire Project in relation to the percentage of budget spent, identification of any major issues, and proposed or implemented corrective actions. Costs incurred prior to the effective date of this contract are not reimbursable. The last 10% of the entire grant will be paid out when the final deliverable has been received. All products, data and information developed as a result of this contract must be provided to as part of the project documentation.

Performance Measures

Performance measures for this contract shall include the following: (a) Performance standards and evaluation: Grantee will produce detailed deliverables for each task as specified. Grantee shall maintain receipts for all project expenses and documentation of the minimum in-kind contributions (if applicable) per the budget in the Budget & Schedule Exhibit B. Per Water Plan Grant Guidelines, the CWCB will pay out the last 10% of the budget when the Final Report is completed to the satisfaction of CWCB staff. Once the Final Report has been accepted, and final payment has been issued, the purchase order or grant will be closed without any further payment. (b) Accountability: Per Water Plan Grant Guidelines full documentation of project progress must be submitted with each invoice for reimbursement. Grantee must confirm that all grant conditions have been complied with on each invoice. In addition, per Water Plan Grant Guidelines, Progress Reports must be submitted at least once every 6 months. A Final Report must be submitted and approved before final project payment. (c) Monitoring Requirements: Grantee is responsible for ongoing monitoring of project progress per Exhibit A. Progress shall be detailed in each invoice and in each Progress Report, as detailed above. Additional inspections or field consultations will be arranged as may be necessary. (d) Noncompliance Resolution: Payment will be withheld if grantee is not current on all grant conditions. Flagrant disregard for grant conditions will result in a stop work order and cancellation of the Grant Agreement.



Last Updated: May 2021

Colorado Water Conservation Board

Water Plan Grant – Statement of Work – Exhibit A

Statement Of Work

Date:	11/20/2021
Name of Grantee:	Trout Unlimited
Name of Water Project:	Tomichi and Cebolla Creeks Restoration Package
Funding Source:	Water Plan Grant Watershed Restoration and Rec Category
Water Project Overview:	
<p>Trout Unlimited (TU) staff will work with landowners in the Tomichi Creek and Cebolla Creek watersheds to restore instream and riparian habitat, improve irrigation water management, improve watershed health, and drought resiliency. Tomichi Creek and Cebolla Creek are both headwater tributaries to the Upper Gunnison River.</p> <p>The proposed restoration activities will improve instream habitat and riparian health by reducing erosion, increasing vegetative cover on stream banks, reconnecting/re-establishing floodplains, to increase adjacent ground water levels. Restoration prescriptions will differ to suit specific land uses and management goals. Low-tech processed based restoration methods and grazing management will be used on the Cebolla Creek site and more traditional bank and channel stabilization technics used at the Tomichi site. Both locations will include irrigation water control improvements that are expected to improve irrigation water management, wetlands, and stream flows.</p> <p>Project partners include private landowners, the National Resource Conservation Service (NRCS), USFWS Partners for Fish and Wildlife (PFW), Colorado Parks and Wildlife (CPW), and the Upper Gunnison River Water Conservancy District.</p> <p>Funding from the CWCB Water Plan Grant will be used for, labor, excavation and materials. The two participating landowners are under contract with the NRCS and have utilized NRCS staff for restoration design and planning.</p>	
Project Objectives:	



Last Updated: May 2021

Tasks
Task 1 – L&P Ranch Stream and Irrigation Improvement
Description of Task: <p>L&P Ranch is located on 30 miles south of Gunnison in the Cebolla Creek Watershed. This task will include stream channel restoration, riparian pasture fencing, and irrigation management improvements. The work is coordinated effort between L&P Ranch, TU, NRCS, and Partners for Fish and Wildlife.</p> <p>Low tech restoration techniques will be implemented on the ranch in Cebolla Creek and Powderhorn Creek in order to improve stream processes and hydrologic function. Structures will include bank attached and mid-channel PALS and wicker weirs. The fencing will split the property from one field into four and allow for grazing to be implemented in a way that benefits long term production of forage, riparian health, and wildlife habitat. Cross fencing will limit the duration of livestock access to Cebolla and Powderhorn Creeks. Two structures for water control will be installed to control and manage irrigation water from the MB and A Ditch more effectively. The structure on the MB ditch will allow irrigators to better distribute water on the irrigated meadow and direct tail water from neighboring upgradient fields back to Cebolla Creek thereby improving stream flows through the reach.</p>
Method/Procedure:



Last Updated: May 2021

L&P Ranch will hire a fencing contractor to construct 7,000 feet of fence during the summer of 2022. Plans for the fence were developed by NRCS to meet NRCS standards. The segment of fence that crosses Cebolla Creek will be a swing fence to allow debris and ice to pass unobstructed when livestock are not on the property.

L&P ranch will hire a stream restoration contractor to construct PALS and wicker weirs on Cebolla and Powderhorn Creek. Willow material for the structures will be sourced on site. Logs and larger woody debris will be sourced from a neighboring property in coordination with fire mitigation efforts. Restoration work is planned for the fall of 2022 and expected to take 3-4 weeks.

Two board stop water control structures will be fabricated by a local contractor to install in the MB and A ditch. L&P ranch will use ranch labor and equipment to install the structures in fall of 2022.

Deliverable:

Final report documenting expenses and summarizing completion of riparian pasture fence, 2 water control structures.

Before, after, during construction photos points of stream restoration structures
1.5 miles of stream protected/restored.

Tasks

Task 2 – Tomichi Preserve Stream Restoration

Description of Task:

This task is a joint effort between the NRCS, USFWS Partners for Wildlife Program, the Upper Gunnison Water Conservancy District, Trout Unlimited and Tomichi Creek Preserve LLC to restore and 2500 feet of Tomichi Creek stream channel and permanently protect 100 acres of degraded riparian/wetland habitat on Tomichi Creek Preserve. Tomichi Creek Preserve is a conservation subdivision designed to improve an ecologically degraded piece of property located 2 miles south of Gunnison on Tomichi Creek. The portion of Tomichi creek running through the property was channelized 60-80 years ago and became uniformly wide and shallow, with little bedform diversity. Over time it became increasingly entrenched and lost connectivity to lateral wetlands and numerous oxbows adjacent to the old channel. In 2005, the first phase of this project was initiated with a WRP easement on 80 acres of the property and a stream restoration project that returned 3,000 feet of Tomichi Creek back into its original meandering channel. This final phase, which CWCB funding is requested, will induce meandering on an additional 1500 feet of straightened channel near the western edge of the property and restore 1000 feet of stream near the eastern edge of the property.



Last Updated: May 2021

Method/Procedure:
<p>NRCS stream restoration engineering staff have completed survey and design of the two segments where restoration will take place. The Latest design is included in as Exhibit B.</p> <p>The Upper Reach, located on the eastern end of the property, will include several rock structures, sod mats and transplanted willows to maintain channel grade and stability. The majority of rock has been purchased and staged at the site. Excavation contractor has been selected and will begin work during the summer/fall of 2022.</p> <p>Design of the Lower Reach, near the western end of the property, will be modified to avoid conflict with sewer line crossing under the creek in the middle of that reach. NRCS is currently working on an updated design that will include channel structures and excavation of designed meanders.</p> <p>Restoration of this segment is expected to take place in 2022 when the contractor is mobilized on site.</p>
Deliverable:
<p>Final report documenting expenses and before, after, during construction photos points of stream restoration structures</p> <p>2500 feet of stream restored.</p> <p>100 acres of wetland protected.</p>

Tasks
Task 3 – Grant Admin NICRA
Description of Task:
<p>This task will involve contracting, insurance, payments to contractors, reimbursement invoices to CWCB, and accounting of project expenses.</p>



Last Updated: May 2021

Method/Procedure:

13.74% of project equipment and contracted expenses is included in the budget.

Deliverable:

Project oversight, reporting and management of tasks.

Repeat for Task 3, Task 4, Task 5, etc.

Budget and Schedule

This Statement of Work shall be accompanied by a combined Budget and Schedule that reflects the Tasks identified in the Statement of Work and shall be submitted to CWCB in excel format.

Reporting Requirements

Progress Reports: The applicant shall provide the CWCB a progress report every 6 months, beginning from the date of issuance of a purchase order, or the execution of a contract. The progress report shall describe the status of the tasks identified in the statement of work, including a description of any major issues that have occurred and any corrective action taken to address these issues.



Last Updated: May 2021

Final Report: At completion of the project, the applicant shall provide the CWCB a Final Report on the applicant's letterhead that:

- Summarizes the project and how the project was completed.
- Describes any obstacles encountered, and how these obstacles were overcome.
- Confirms that all matching commitments have been fulfilled.
- Includes photographs, summaries of meetings and engineering reports/designs.

The CWCB will pay out the last 10% of the budget when the Final Report is completed to the satisfaction of CWCB staff. Once the Final Report has been accepted, and final payment has been issued, the purchase order or grant will be closed without any further payment.

Payment

Payment will be made based on actual expenditures and must include invoices for all work completed. The request for payment must include a description of the work accomplished by task, an estimate of the percent completion for individual tasks and the entire Project in relation to the percentage of budget spent, identification of any major issues, and proposed or implemented corrective actions.

Costs incurred prior to the effective date of this contract are not reimbursable. The last 10% of the entire grant will be paid out when the final deliverable has been received. All products, data and information developed as a result of this contract must be provided to as part of the project documentation.

Performance Measures

Performance measures for this contract shall include the following:

(a) Performance standards and evaluation: Grantee will produce detailed deliverables for each task as specified. Grantee shall maintain receipts for all project expenses and documentation of the minimum in-kind contributions (if applicable) per the budget in Exhibit C. Per Grant Guidelines, the CWCB will pay out the last 10% of the budget when the Final Report is completed to the satisfaction of CWCB staff. Once the Final Report has been accepted, and final payment has been issued, the purchase order or grant will be closed without any further payment.

(b) Accountability: Per Grant Guidelines full documentation of project progress must be submitted with each invoice for reimbursement. Grantee must confirm that all grant conditions have been complied with on each invoice. In addition, per Grant Guidelines, Progress Reports must be submitted at least once every 6 months. A Final Report must be submitted and approved before final project payment.

(c) Monitoring Requirements: Grantee is responsible for ongoing monitoring of project progress per Exhibit A. Progress shall be detailed in each invoice and in each Progress Report, as detailed above. Additional inspections or field consultations will be arranged as may be necessary.

(d) Noncompliance Resolution: Payment will be withheld if grantee is not current on all grant conditions. Flagrant disregard for grant conditions will result in a stop work order and cancellation of the Grant Agreement.



Water Plan Grant - Exhibit C

Budget and Schedule

Project End Date:

Task No.	Task Description	Task Start Date	Task End Date	Grant Funding Request	Match Funding	Total
1						\$0
2						\$0
3						\$0
						\$0
						\$0
						\$0
						\$0
						\$0
						\$0
						\$0
						\$0
						\$0
						\$0
						\$0
						\$0
						\$0
Total				\$0	\$0	\$0



COLORADO

Colorado Water
Conservation Board

Department of Natural Resources

Colorado Water Conservation Board

Water Plan Grant - Detailed Budget Estimate

Fair and Reasonable Estimate

Prepared Date: 11/20/2021
Name of Applicant: Trout Unlimited
Name of Water Project: Tomichi and Cebolla Restoration Package

EXAMPLE C: Construction

Task 1 - L&P Ranch Stream and Irrigation Improvement Restoration						Matching
Sub-task	Unit	Quantity	Unit Cost	Total Cost	CWCB Funds	Funds
Pasture/Riparian Fence	LF	7,000	\$ 8	\$ 56,000	\$ 20,000	\$ 36,000
Inchannel Structure	EA	8	\$ 4,000	\$ 32,000	\$ 16,000	\$ 16,000
Water Control Structure	EA	2	\$ 9,000	\$ 18,000	\$ 9,000	\$ 9,000
Task total				\$ 106,000.00	\$ -	\$ 45,000.00
Task 2 - Tomichi Preserve Stream Restoration						
Sub-task						
Excavation	HR	600	\$ 250.00	\$ 150,000.00	\$ 45,000.00	\$ 105,000.00
Rock Material	CY	1200	\$ 85.00	\$ 102,000.00	\$ 30,600.00	\$ 71,400.00
Task Total				\$ 252,000.00	\$ -	\$ 75,600.00
Task 3- Grant Management						
Admin and indirect	Percent	0.1374	\$ 120,600.00	\$ 16,570.44	\$ 16,570.44	\$ 2,000.00
TOTAL				\$ 374,570.44	\$ 137,170	\$ 239,400

DESIGN DRAWINGS (REV: 5/29/2020)

Funding Program: ACEP
USDA NRCS



JOB CLASS:	V
SHEET REVISED:	5/29/2020
SHEET 01 OF 17	

GENERAL NOTES

1. All work shall comply with the construction specifications, drawings, and other contract requirements.
2. All notes and specifications are directed to the Contractor, unless stated otherwise.
3. Keep at least one copy of final drawings, specifications, and stormwater management plan on-site during construction.
4. Use an excavator with a hydraulic thumb to place boulders, logs, and rootwads.
5. Verify site conditions at the work site before mobilization. Locate and mark all underground and overhead utilities within the construction limits, including septic systems, water lines, irrigation pipes, wells, and underground tanks.
6. Provide erosion control measures and best management practices to prevent runoff from disturbed areas and exposed soils from entering surface waters or wetland areas. Filter muddy runoff or discharges from disturbed areas to prevent an increase in turbidity of surface water (seeps, springs, streams, rivers, lakes, and wetlands). See erosion control notes for more information.
7. Preserve existing vegetation to greatest extent possible. Save and replace plants and sod patches when practical, especially willow clumps.
8. When fence is present within work areas, remove and replace as needed to complete work.
9. Accomplish in-stream work during low flow conditions. Minimize the disturbance.
10. Finish grade to slopes as specified on the drawings. Blend grades to match existing grades. Work includes minor grading, and sloping "flat" areas to at least 2% to provide positive drainage.
11. Take precautions to avoid spilling fuel or oil. If a fuel or oil spill occurs, properly clean the affected area and dispose of any contaminated soils to prevent surface or ground water contamination. A spill response kit is required while equipment is operating. See specifications for more details.
12. Store or stage equipment, fuels, lubricants, and other potential contaminants at least 50 feet away from the stream, surface waters, wetlands, or other sensitive habitats.
13. Remove, store, and replace topsoil to restore disturbed areas that do not have other specified surfacing. Seed and mulch all disturbed soil surfaces with native grass seed according to the specifications.
14. Restore access and staging areas used during construction to pre-existing conditions or better. Plan the movement of equipment and materials to minimize disturbance, and to limit the number of trips to and from each work site.
15. All excavation work is unclassified (See Specifications for the definition of "unclassified excavation"), unless noted otherwise. All earthwork required by and shown on the drawings is included in the work.
16. Stake bankfull elevations at the work site before installing structures or other work. The Engineer will provide bankfull elevations by station, or will help identify bankfull in the field.
17. Provide structures according to typical details, structural tables, and proposed cross-sections, unless noted otherwise or changed in the field for site-specific conditions.
18. Typical details show the required components for the work, but existing site conditions will vary. Field-adjust to match existing conditions.
19. All plan dimensions are true horizontal, and vertical dimensions are true vertical.
20. Replace or reset disturbed property corner pins or other survey monuments using services of a state-licensed professional land surveyor.
21. Property lines, if shown, are approximate.
22. Given the dynamic nature of natural streams and the highly variable topography of riparian areas, field adjustments are expected. Promptly notify the Owner or Engineer if a field adjustment is required. Design changes require the Engineer's approval.
23. Whenever possible, get on-site assistance from the Engineer or Stream Restoration Specialist, especially for first installation of each type of stream structure or component.
24. Inform the Owner of any conflicts or discrepancies among the drawings, details, and specifications. The Engineer or engineer's designated representatives are the only people authorized to make changes to the drawings, details, or specifications. This is a site-specific design. Do not use these drawings and specifications at a different location or for any other purposes.

Contact information is below:
Design Engineer: TJ Burr, PE
Telephone: 720-930-9011 (cell)
Email: Tee.Burr@usda.gov

ABBREVIATIONS

- BKF: Bankfull elevation. The approximate flow elevation of stream flow occurring every 1.5 years on average.
- BMP: Best management practice
- CMP: Corrugated Metal Pipe
- CY: Cubic yards
- E&S: Erosion and Sediment
- FT: Feet
- PE: Professional Engineer
- PLS: Professional Land Surveyor
- SF: Square feet
- STA: Stationing for alignments of existing stream channel and proposed work.
- SY: Square yards
- TW: Thalweg, or lowest flow path in stream channel
- TYP: Typical; as used in similar conditions.

GENERAL NOTES FOR EROSION & SEDIMENT CONTROL

1. All erosion and sediment (E&S) control measures without specific pay items are subsidiary to pollution control. For measures not defined by the contract documents, use best management practices (BMPs) for E&S control as defined by the authority having jurisdiction or the Urban Storm Drainage Criteria Manual, Volume 3, Denver CO, whichever is more stringent.
2. To help prevent the introduction of invasive, non-native plants and organisms to work areas, clean all construction equipment before initial arrival on site. There shall be no clumps of soil, mud, organic material, or plant materials on or in the equipment. A thorough power wash is normally adequate.
3. Biodegradable hydraulic fluid is not required, unless the authority having jurisdiction requires it or it is required by permit conditions. Spill containment and an immediate response to stop fluid leaks is required by the general notes and construction specifications.
4. Use the following additional E&S control BMPs as required (subsidiary to pollution control): preserving existing vegetation, rock check dams, surface roughening, temporary seeding, mulching, erosion control wattles, biodegradable erosion control fabric (soil retention blanket), and temporary diversions. Provide other E&S controls as required by the drawings and specifications.
5. Erosion and sediment control measures shall be constructed, stabilized, and functional before site disturbance begins within the tributary areas of those measures.
6. After the finished site is stable, remove temporary E&S measures. Immediately stabilize areas disturbed during removal of the measures. Biodegradable measures above bankfull flow line may remain.
7. Construction access to the site is restricted to the location(s) shown on the drawings. Do not clear and grub outside of the construction limits shown on the drawings or marked in the field. Only disturb areas as required for construction.
8. Stockpile heights shall not exceed 35 feet. Stockpile slopes shall be 2H:1V or flatter. Place a silt fence around low side (downstream side) of temporarily stockpiled soils left for 6 or more days. Use temporary seeding on soil stockpiles left for 21 days or more.
9. Seed and mulch disturbed areas or finish graded areas that will be left bare for 6 or more days.
10. Maintain all erosion control measures throughout construction and until the site is stable. Inspect erosion control measures weekly and after each runoff event (rainfall equal to ½-inch or more, or snow-melt of 6-inches or more). Accomplish remedial maintenance work immediately, including clean out, repair, replacement, re-grading, re-seeding, re-mulching, etc. required maintenance is subsidiary to pollution control.
11. When using pumps for de-watering operations, filter the discharge with a special stilling basin or other acceptable filtration method.
12. Additional requirements are included in the construction specifications, on the construction drawings, and in the storm water (or NPDES) permit. The contractor may use additional BMPs to limit erosion and control sediment incidental to pollution control.

GENERAL CONSTRUCTION SEQUENCE

THE FOLLOWING CONSTRUCTION SEQUENCE INCLUDES RECOMMENDATIONS TO SUPPLEMENT THE CONTRACTOR'S PLANS WITH REGARD TO EROSION AND SEDIMENT (E&S) CONTROL.

1. MOBILIZE EQUIPMENT AND MATERIALS TO THE SITE, AND ESTABLISH STAGING AREA. MAKE NECESSARY IMPROVEMENTS TO THE ACCESS ROAD AND ENTRANCE. KEEP ALL CONSTRUCTION TRAFFIC WITHIN THE CONSTRUCTION LIMITS.
2. INSTALL SILT FENCE OR WATTLES AROUND STAGING, STOCKPILE, AND PARKING AREAS TO FILTER SHALLOW SHEET FLOWS. INSTALL SILT FENCE, WATTLES, AND OTHER E&S MEASURES AT LOWER ENDS OF CONSTRUCTION LIMITS.
3. CLEAR AND GRUB AREAS WITHIN CONSTRUCTION AREAS AS REQUIRED TO COMPLETE THE WORK. FOR LARGE EARTHWORK SLOPES, INSTALL SILT FENCE ACROSS DISTURBED AREAS (PERPENDICULAR TO FLOW) AT 100 FOOT INTERVALS.
4. FOLLOW A LOGICAL SEQUENCE OF WORK TO LIMIT THE AMOUNT OF EXPOSED DISTURBED AREA. INSTALL ALL DOWNSTREAM PROTECTION MEASURES BEFORE DISTURBING UPSTREAM AREAS. IF SPECIFIED, INSTALL SEDIMENT PONDS OR SIMILAR PRACTICES EARLY IN THE CONSTRUCTION SEQUENCE.
5. DIVERT STREAMS, DITCHES, OR OTHER CONCENTRATED FLOWS FLOW AROUND WORK AREAS USING TEMPORARY PIPES, DIVERSION DITCHES, BERMS, PUMPS, OR OTHER BEST MANAGEMENT PRACTICES.
6. REMOVE ROCK CHECK DAMS AS DOWNSTREAM AND UPSTREAM PORTIONS OF CHANNEL ARE STABILIZED.
7. TEMPORARILY SEED AND MULCH SITE AS REQUIRED THROUGHOUT CONSTRUCTION. PERMANENTLY SEED AND MULCH GRADED AREAS FOLLOWING FINAL GRADING OPERATIONS.
8. CAREFULLY DEMOBILIZE EQUIPMENT FROM THE SITE. STABILIZE AND RESTORE SITE. RESTORE DISTURBED AREAS TO PRE-CONSTRUCTION CONDITIONS OR BETTER.
9. REMOVE NON-BIODEGRADABLE E&S MEASURES AFTER THE SITE IS STABLE.

Date	3/28/2020
TJ BURR	5/29/2020
M. GUTEKUNST	
J. ANDREWS	

Designed by:	TJ BURR
Drawn by:	TJ BURR
Checked by:	M. GUTEKUNST
Approved by:	J. ANDREWS

United States Department of Agriculture USDA Natural Resources Conservation Service	TOMICHI CREEK TOMICHI CREEK LOWER REACH SITE STREAM RESTORATION GENERAL NOTES
JOB CLASS:	V
SHEET REVISED:	6/14/2019
SHEET 02 OF 17	

SYMBOL LEGEND

	RIFFLE		TEMPORARY BENCHMARK, WOOD HUB
	FLOW DIRECTION ARROWS		SURVEY BENCHMARK, REBAR
	EXISTING POOL		
	CONSTRUCTED RIFFLE		
	J-HOOK VANE (SEE TYP. DETAIL)		
	ROCK TOE PROTECTION (SEE TYP. DETAIL)		
	HABITAT BOULDER, (SEE TYP. DETAIL)		
	ESTIMATED BOUNDARY LINE		
	FENCE, EXISTING		
	PROFILE STATIONING (100 FT.)		
	POINT BAR SHAPING/GRADING		
	DECIDUOUS TREE, EXISTING		
	WILLOW OR SHRUB, EXISTING		
	TRANSPLANTED SHRUB		
	SPOT ELEVATION		
	CONSTRUCTION LIMITS		
	EARTHFILL		
	PLANTING AS SPECIFIED		
	NEW POOL		
	STAGING AREA		
	ROOTWAD		
	TOE WOOD		

TOMICHI CREEK
STREAM RESTORATION
STREAM RESTORATION
SYMBOL LEGEND



United States
Department of
Agriculture

Natural Resources
Conservation Service


Job Class
V

REVISED:
4/2/2020


Sheet 03 of #

Date	3/28/2020
TJ BURR	
Designed	
TJ BURR	
Drawn	
M. GUTEKUNST	
Checked	
J. ANDREWS	
Approved	


[illegible]

 <p>United States Department of Agriculture</p> <p>Natural Resources Conservation Service</p>	<p>TOMICHI CREEK TOMICHI CREEK LOWER REACH SITE STREAM RESTORATION</p> <p>SITE PLAN 1</p>		Designed by:	TJ BURR	Date 3/28/2020
			Drawn by:	TJ BURR	5/29/2020
			Checked by:	M. GUTEKUNST	___/___/___
			Approved by:	J. ANDREWS	___/___/___
<p>JOB CLASS: V</p> <p>SHEET REVISED: 5/29/2020</p> <p>SHEET 04 OF 17</p>					


DESIGN DRAWINGS (REV: 5/29/2020)

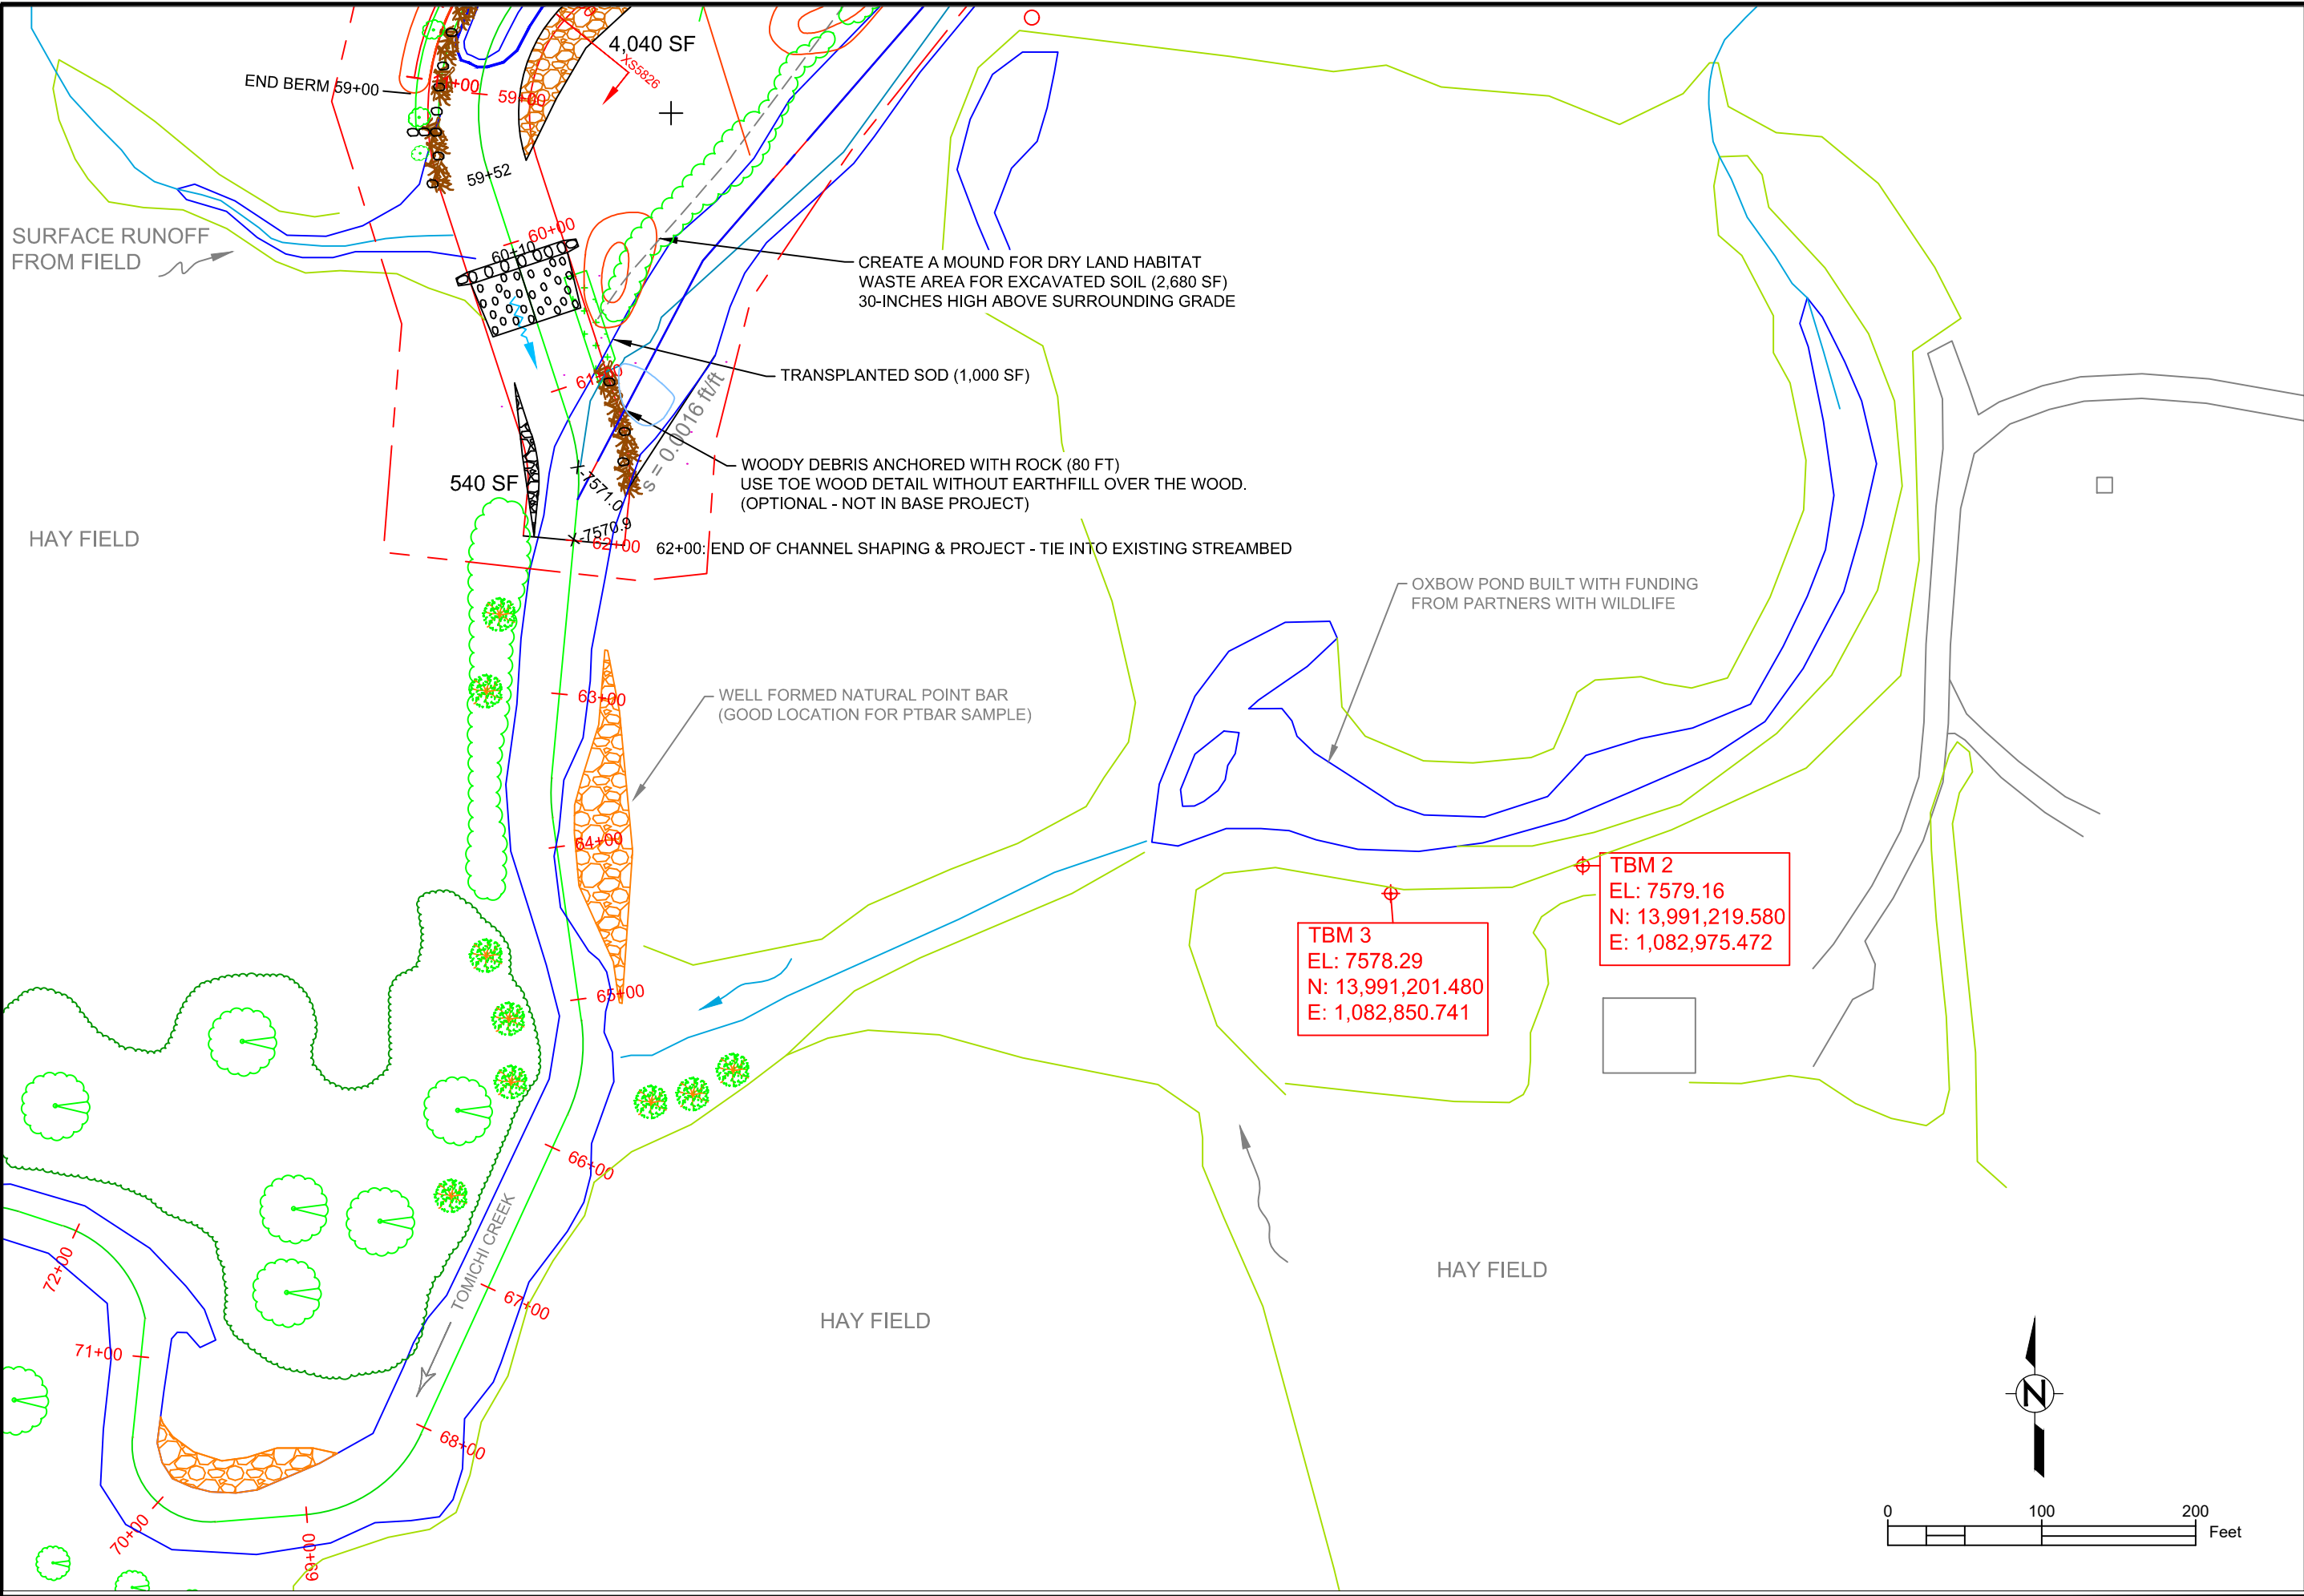

Tomichi Creek Lower Reach Site Stream Restoration SITE PLAN 2	Designed by:	TJ BURR	Date:	3/28/2020
	Drawn by:	TJ BURR		5/29/2020
	Checked by:	M. GUTEKUNST		
	Approved by:	J. ANDREWS		
 United States Department of Agriculture Natural Resources Conservation Service	JOB CLASS:	V		
	SHEET REVISED:	4/3/2020		
	SHEET 05 OF 17			

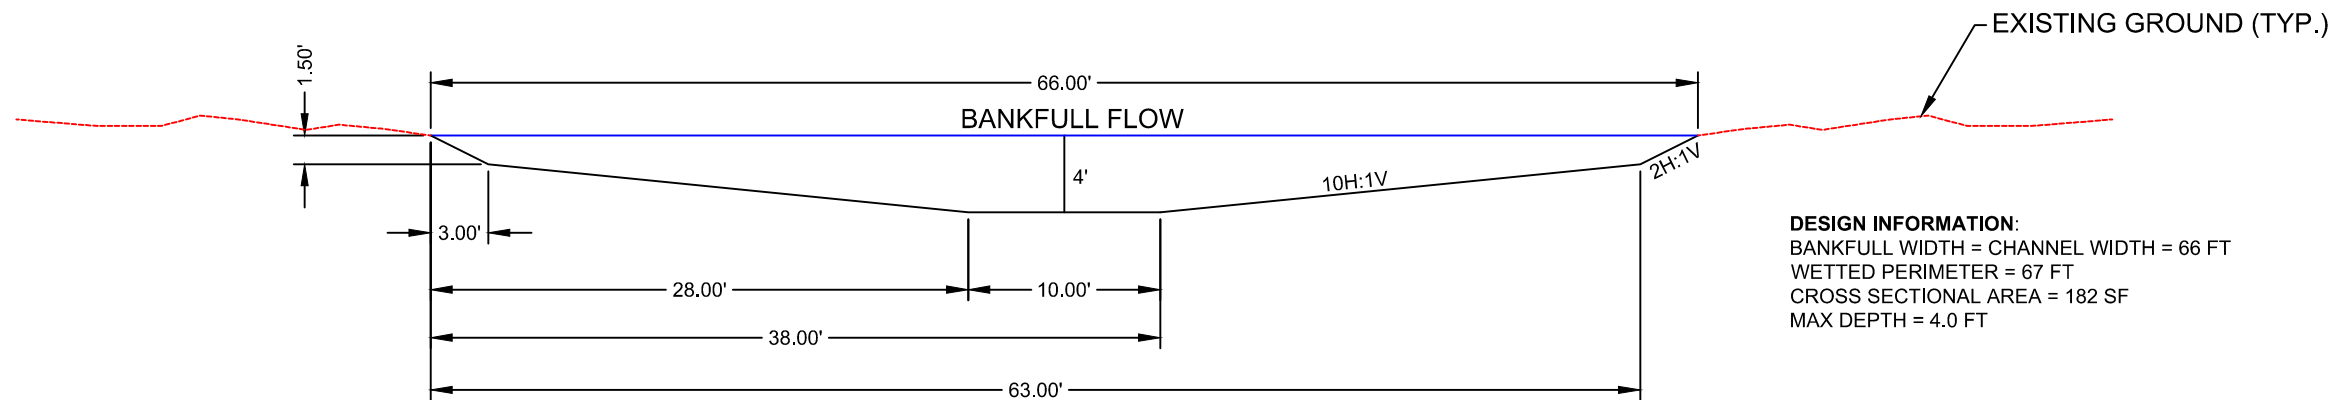


TYPICAL "RIFFLE" CROSS-SECTION (DESIGN)

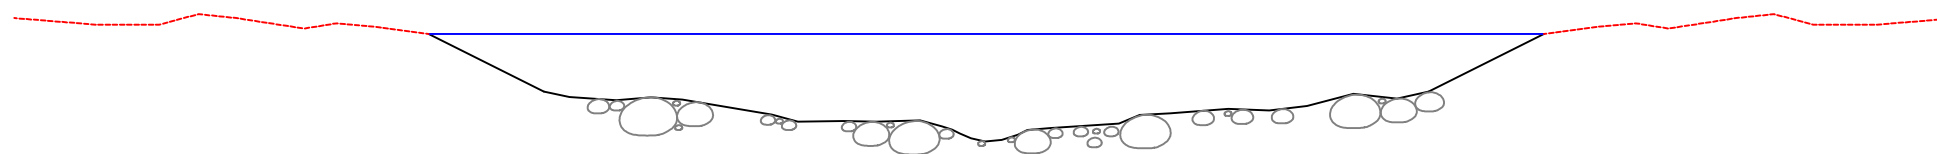

TYPICAL "RIFFLE" CROSS-SECTION (CONSTRUCT)

CHANNEL NOTES:


1. THE FINISH GRADE OF CONSTRUCTED CHANNEL SHOULD BE ROUGH AND CONSIST OF GRAVEL, COBBLE, AND BOULDERS SALVAGED FROM THE EXISTING CHANNEL BED OR FROM THE OLD CHANNEL BED.
2. COMPACT THE CHANNEL BED AND BANKS WITH HEAVY EQUIPMENT AT THE FINISH ELEVATIONS AND GRADES TO HELP EMBED THE GRAVEL AND COBBLE.

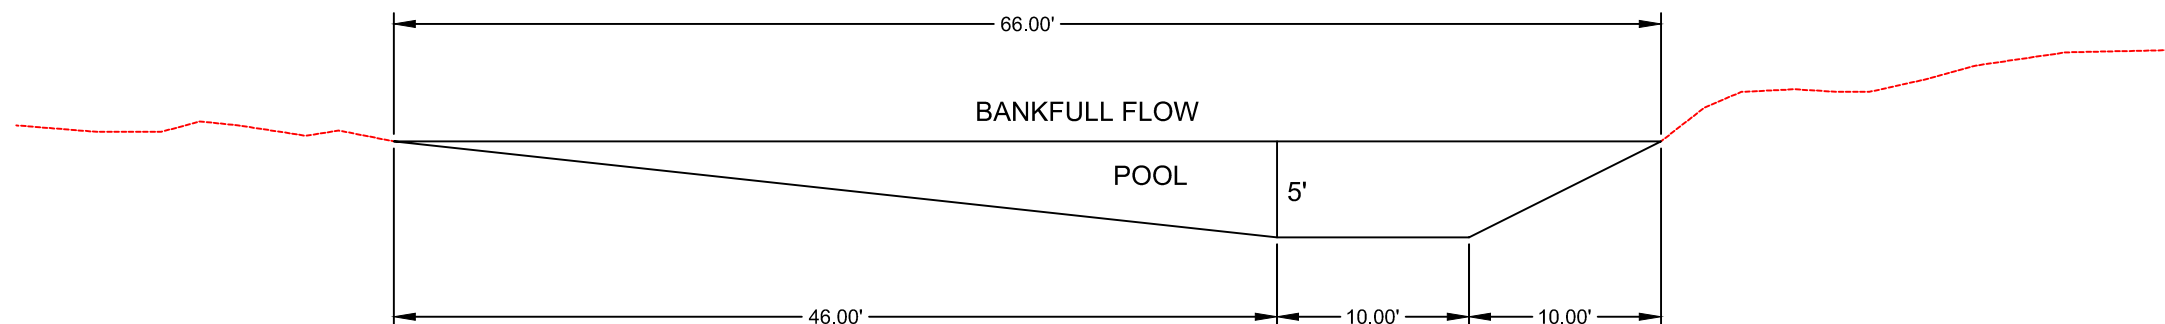


TYPICAL "POOL" CROSS-SECTION (DESIGN)

POOL NOTES:

1. DEEPER PORTION OF POOL IS IN THE OUTER THIRD OF CHANNEL ON OUTSIDE OF BENDS.
2. SOME POOLS HAVE CUSTOM DIMENSIONS AS SHOWN ON THE SECTION DRAWINGS TO BETTER MATCH THE OLD CHANNEL AND REDUCE EXCAVATION.
3. POOL BED MATERIAL IS TYPICALLY SMALLER THAN THE RIFFLE BED MATERIAL, GRAVEL AND SMALL COBBLE.

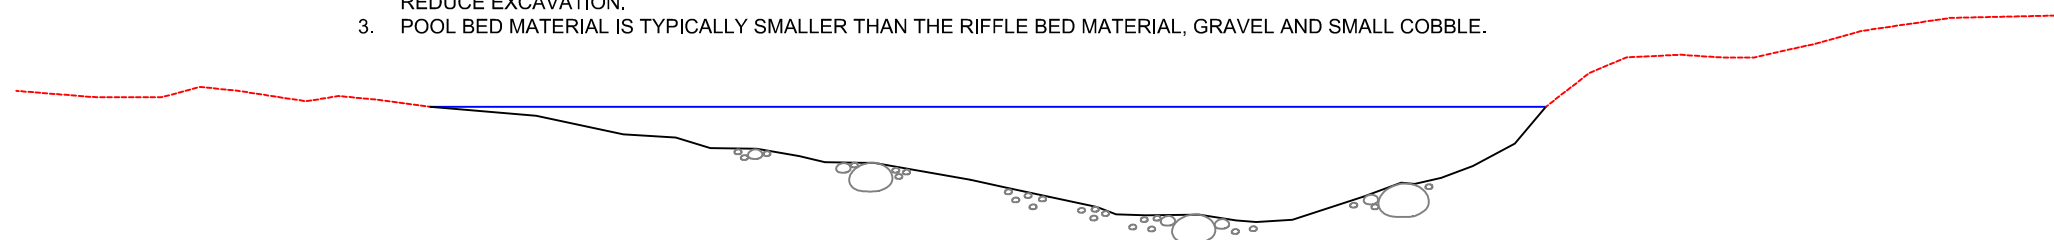

TYPICAL "POOL" CROSS-SECTION (CONSTRUCT)



Designed by:	TJ BURR	Date 3/28/2020
Drawn by:	TJ BURR	5/29/2020
Checked by:	M. GUTEKUNST	___/___/___
Approved by:	J. ANDREWS	___/___/___

TOMICHI CREEK
TOMICHI CREEK LOWER REACH SITE
STREAM RESTORATION
TYPICAL CHANNEL SECTIONS






United States
Department of
Agriculture

Natural Resources
Conservation Service

JOB CLASS:	V
SHEET REVISED:	3/28/2020
SHEET 06 OF 17	

DESIGN DRAWINGS (REV: 5/29/2020)

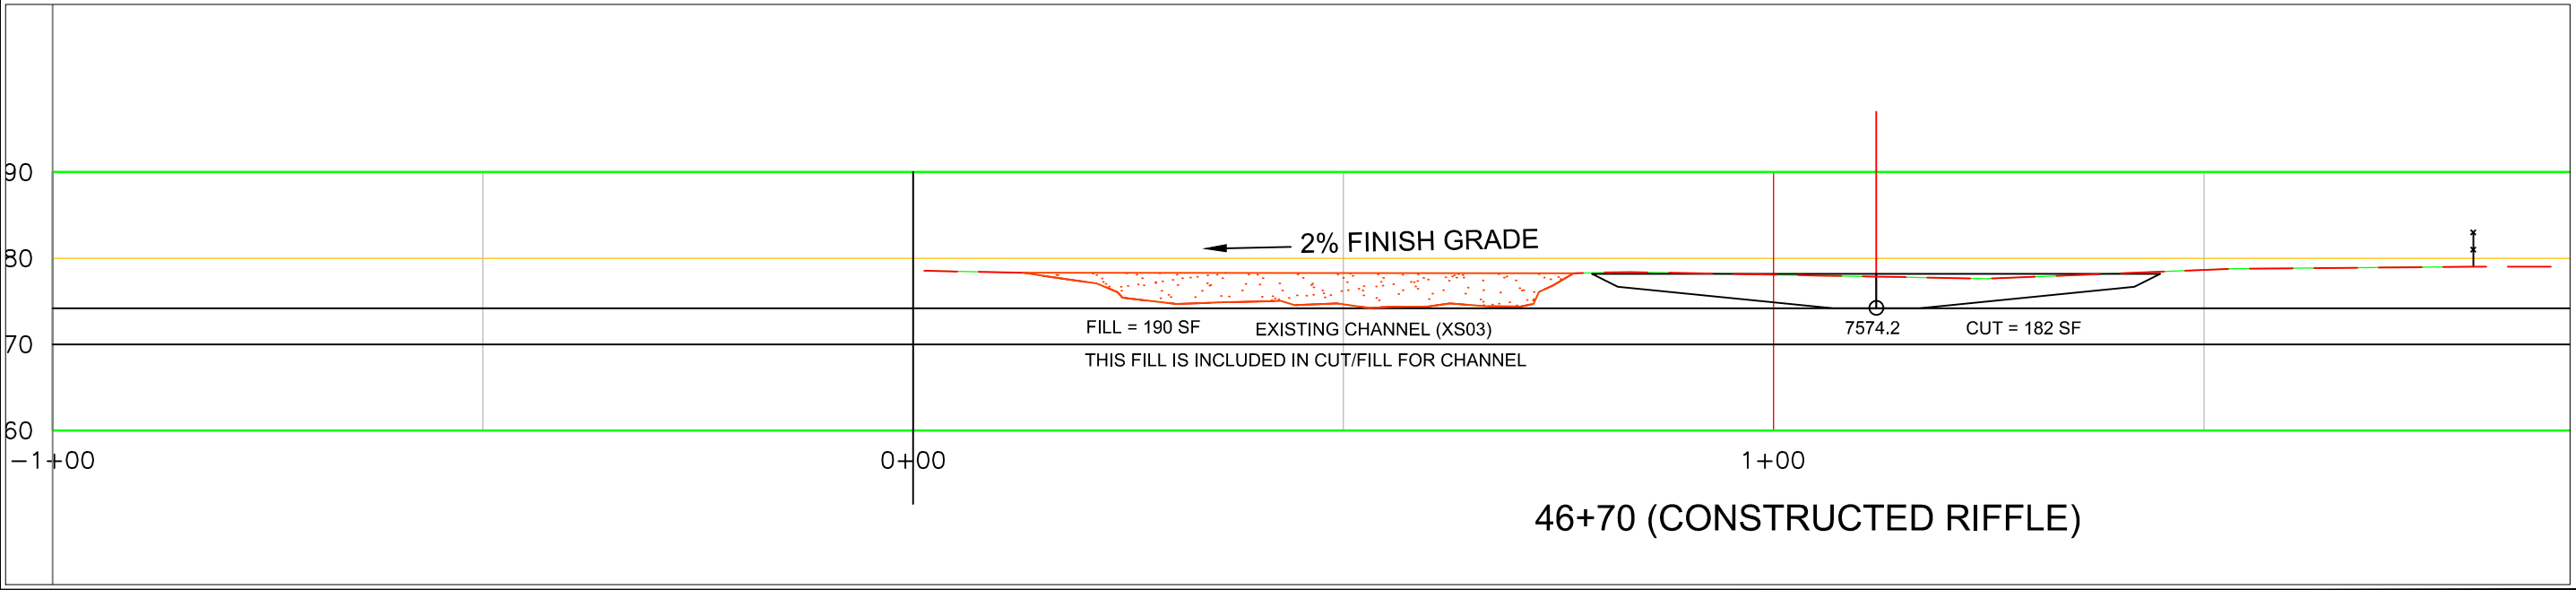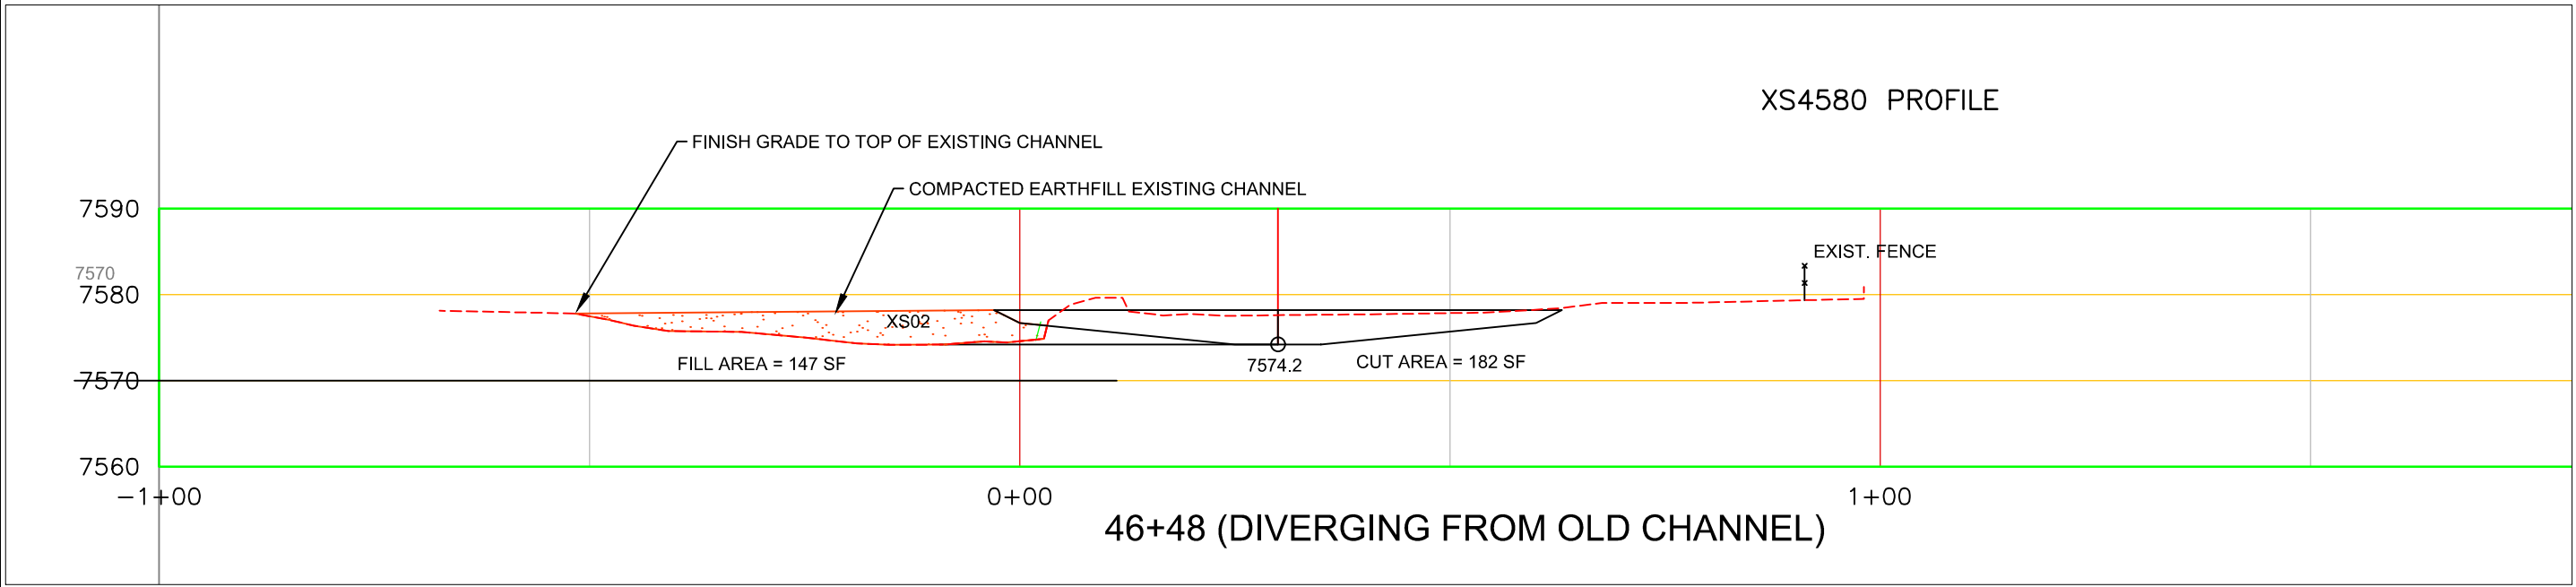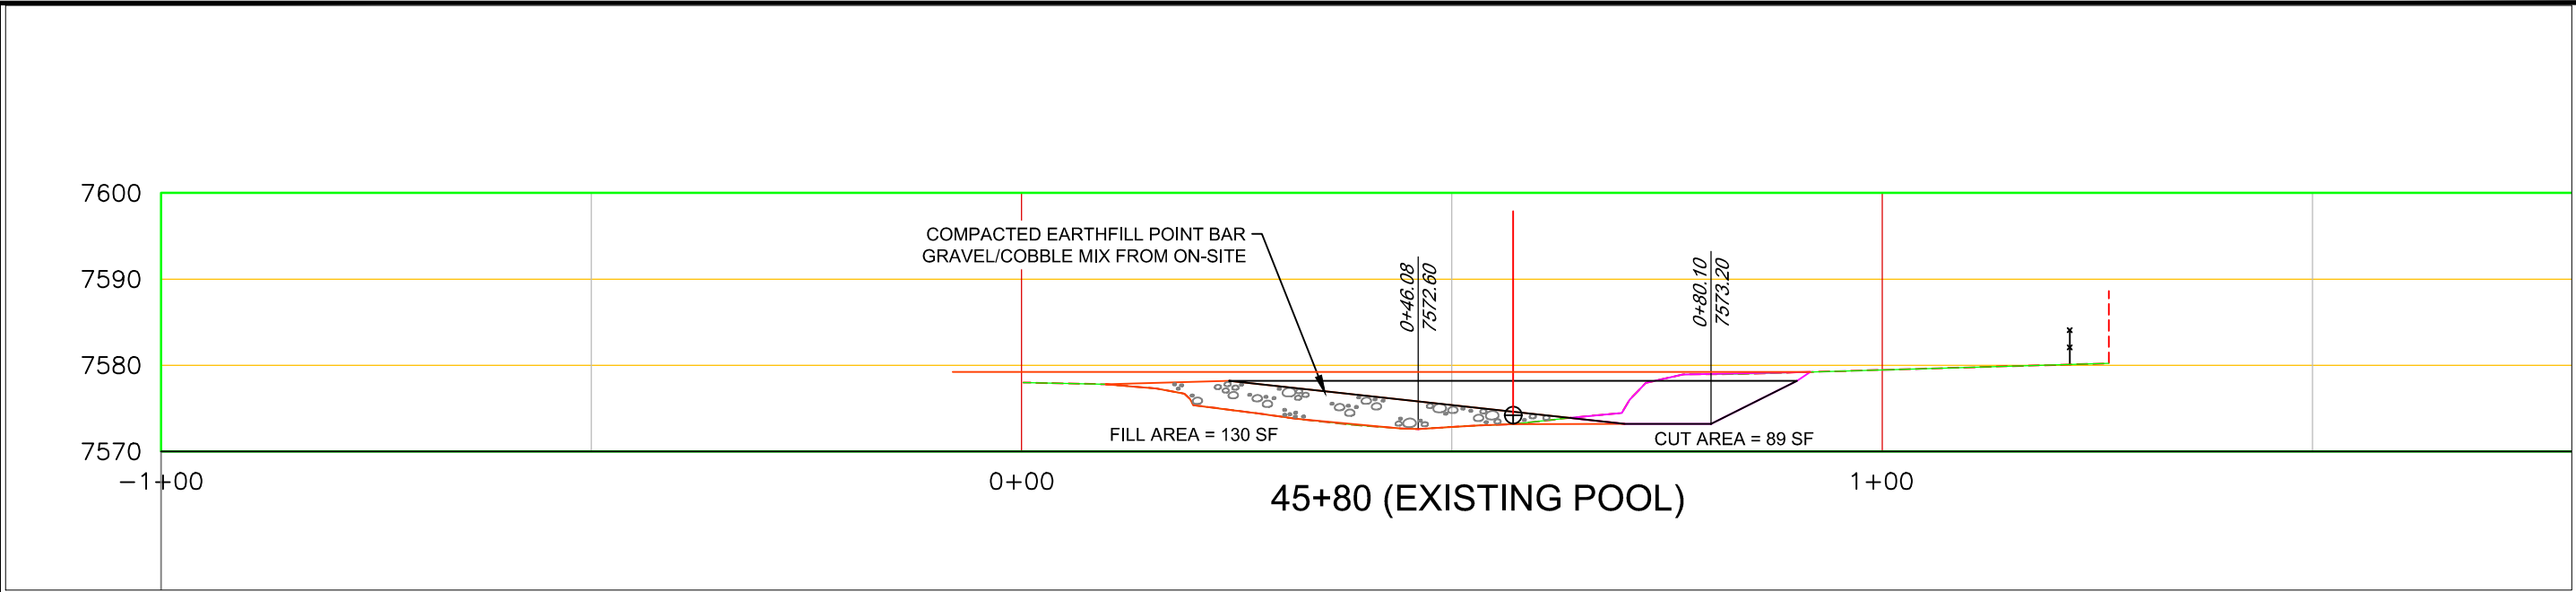

United States Department of Agriculture USDA Natural Resources Conservation Service	Date 3/28/2020	
	Designed by: TJ BURR	Drawn by: TJ BURR
	Checked by: M. GUTEKUNST	
	Approved by: J. ANDREWS	




TOMICHI CREEK LOWER REACH SITE
STREAM RESTORATION
CHANNEL SECTIONS 1

JOB CLASS:
V

SHEET REVISED:
3/29/2020

SHEET 07 OF 17

DESIGN DRAWINGS (REV: 5/29/2020)

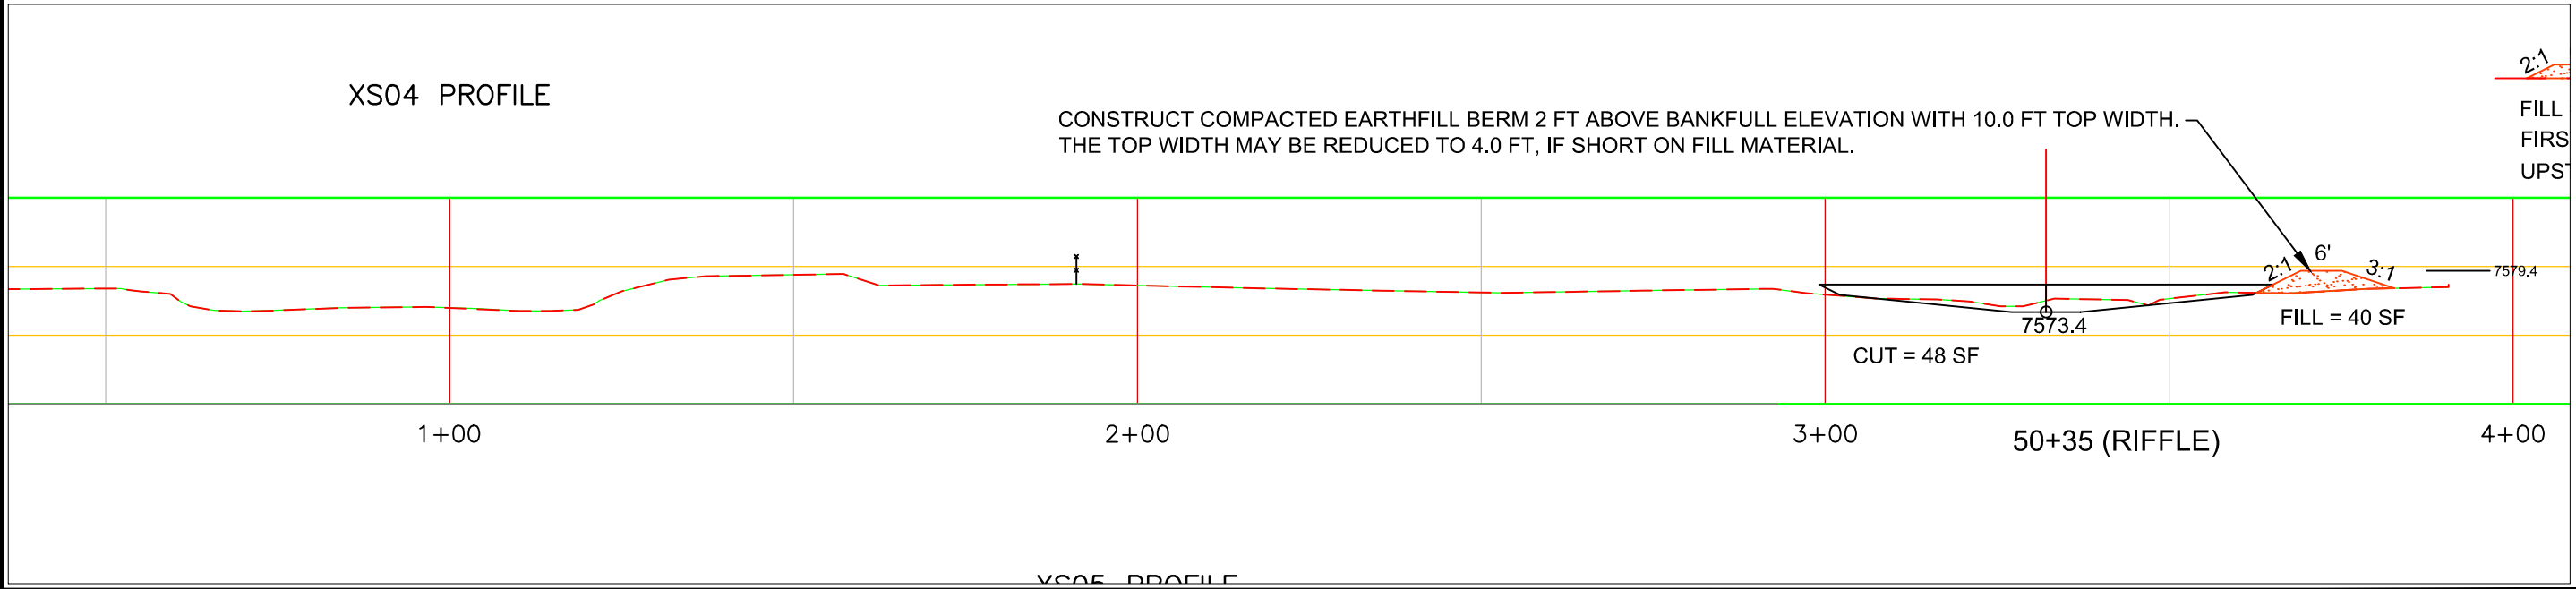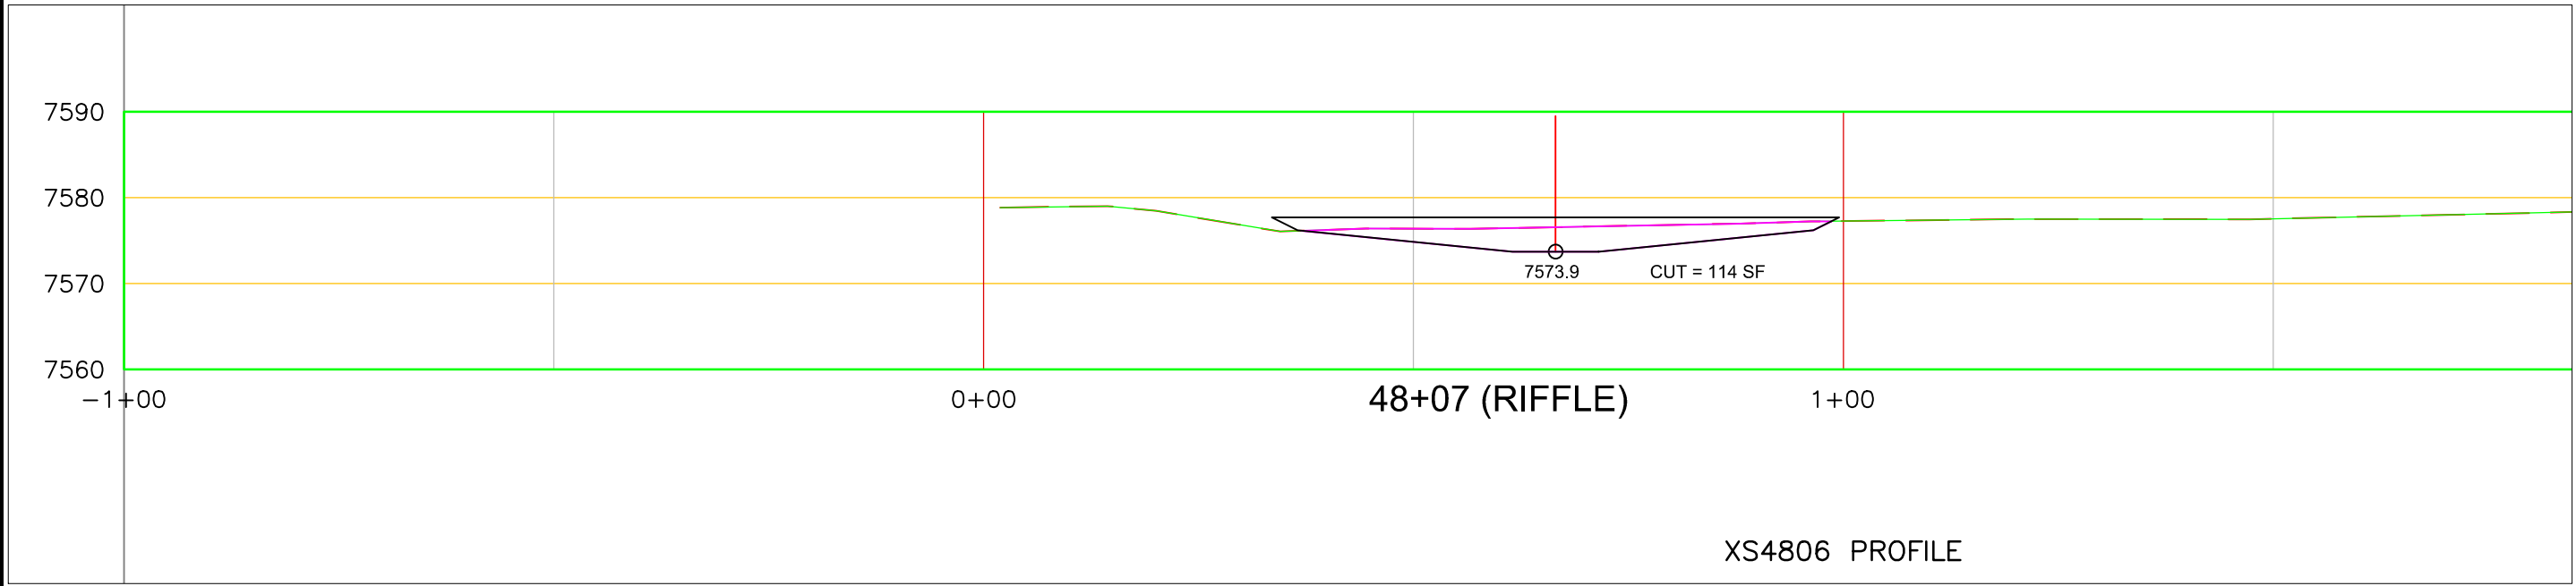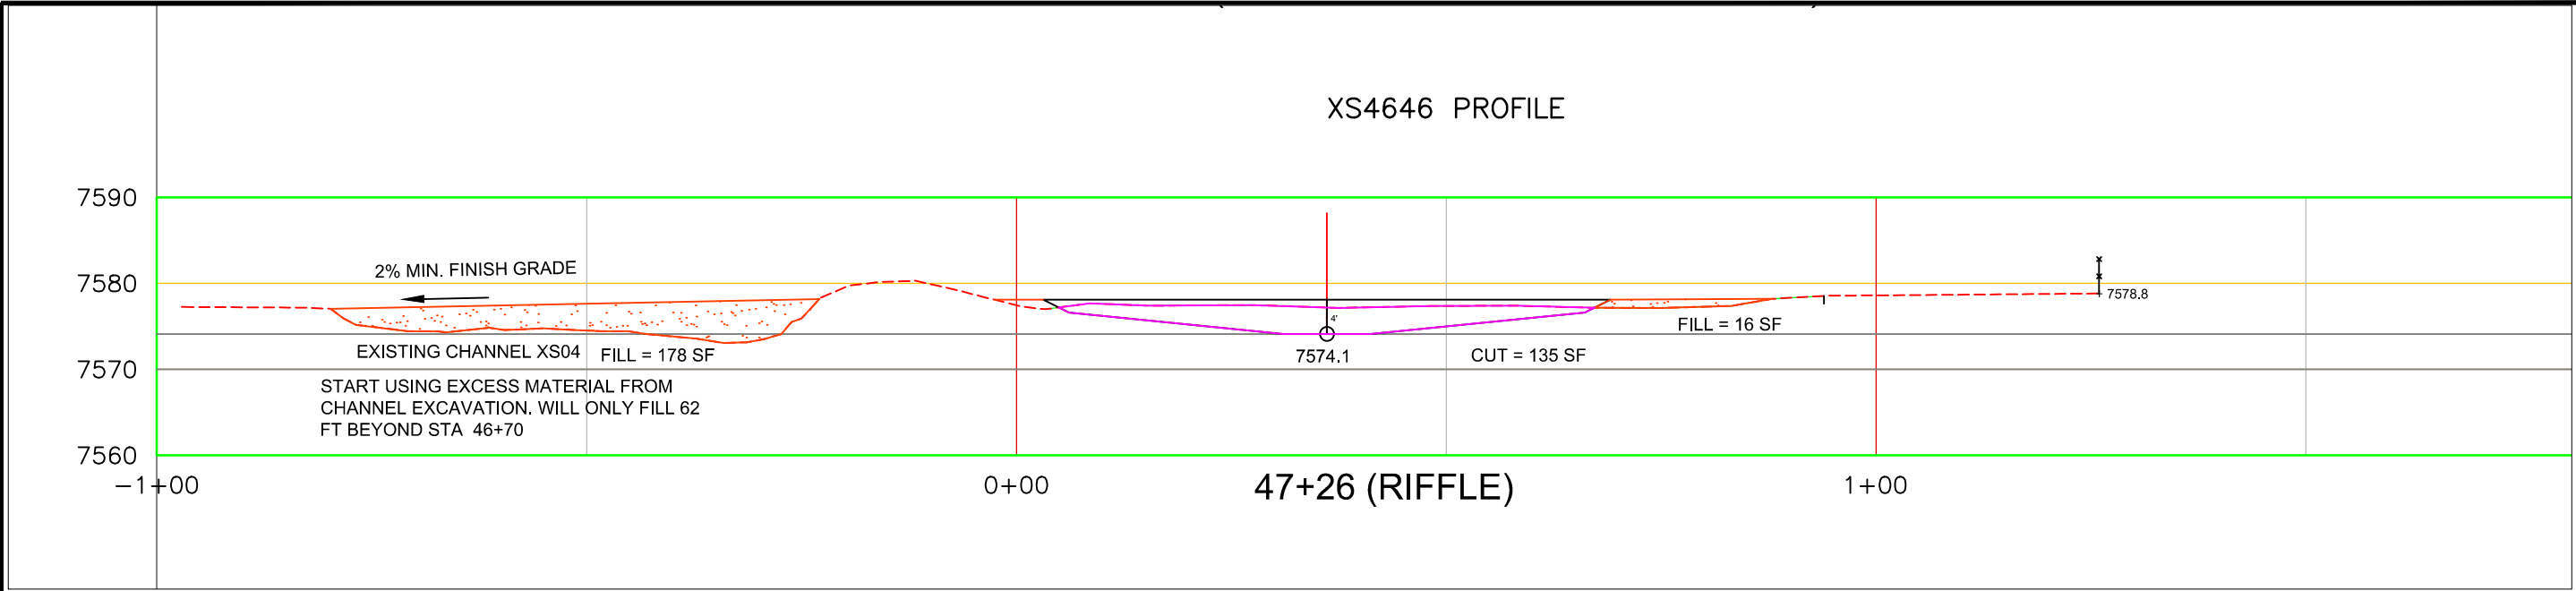

Date	3/28/2020
TJ BURR	
Designed by:	TJ BURR
Drawn by:	M. GUTEKUNST
Checked by:	J. ANDREWS
Approved by:	

TOMICHI CREEK
TOMICHI CREEK LOWER REACH SITE
STREAM RESTORATION
CHANNEL SECTIONS 2




United States
Department of
Agriculture
USDA
Natural Resources
Conservation Service

JOB CLASS:
V

SHEET REVISED:
3/29/2020

SHEET 08 OF 17

DESIGN DRAWINGS (REV: 5/29/2020)

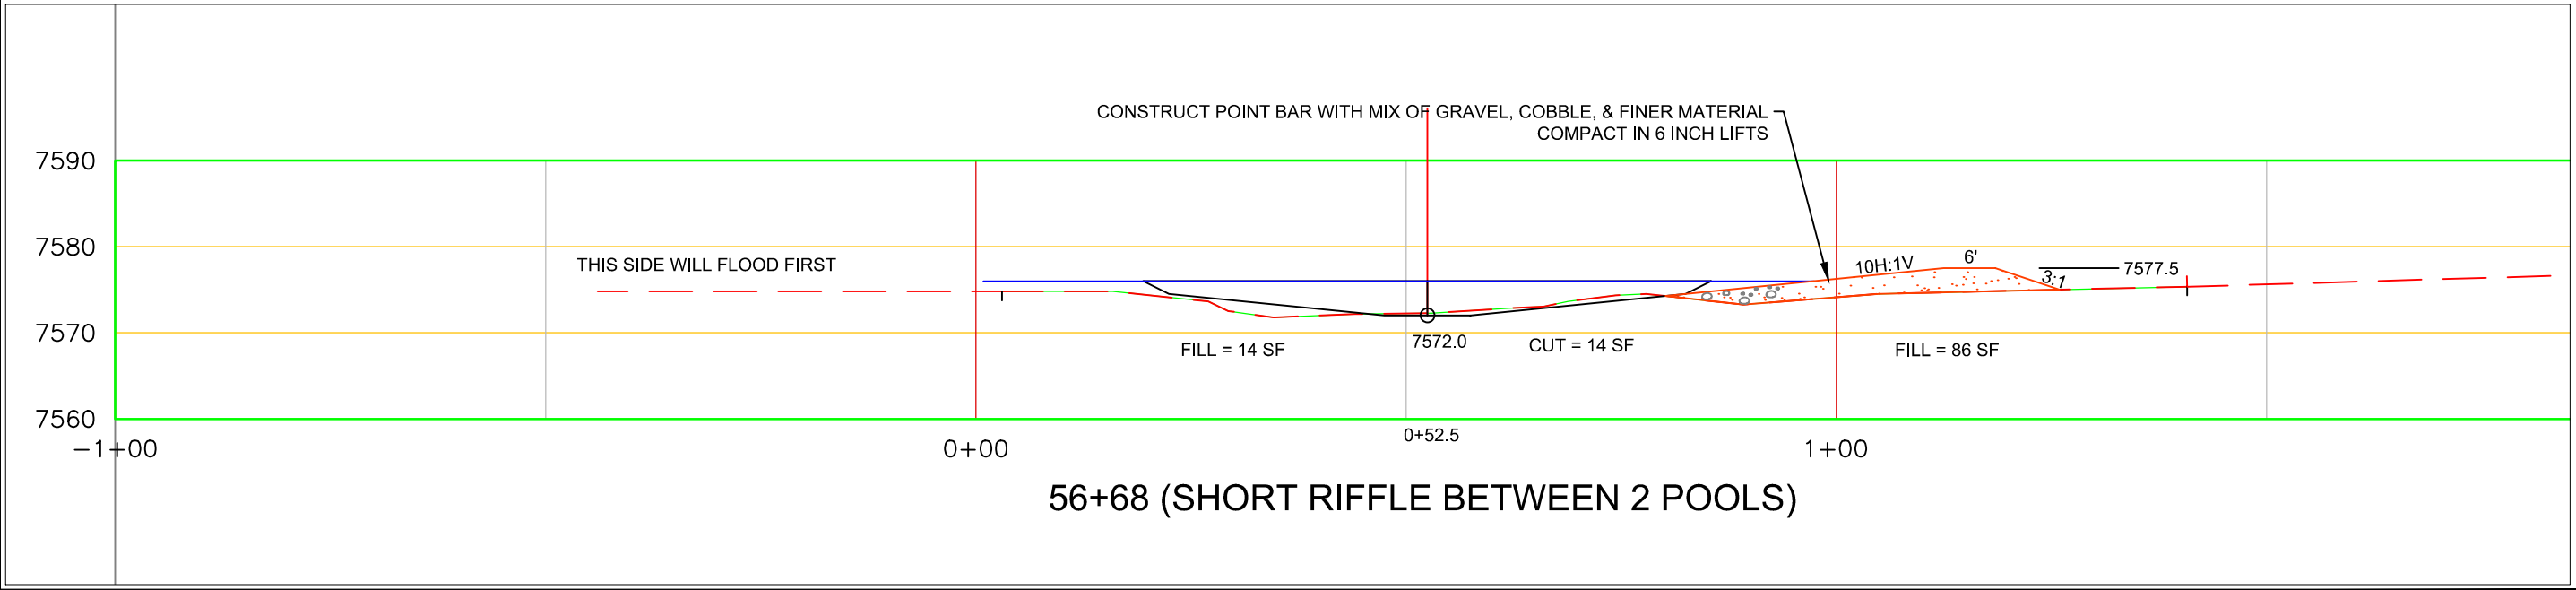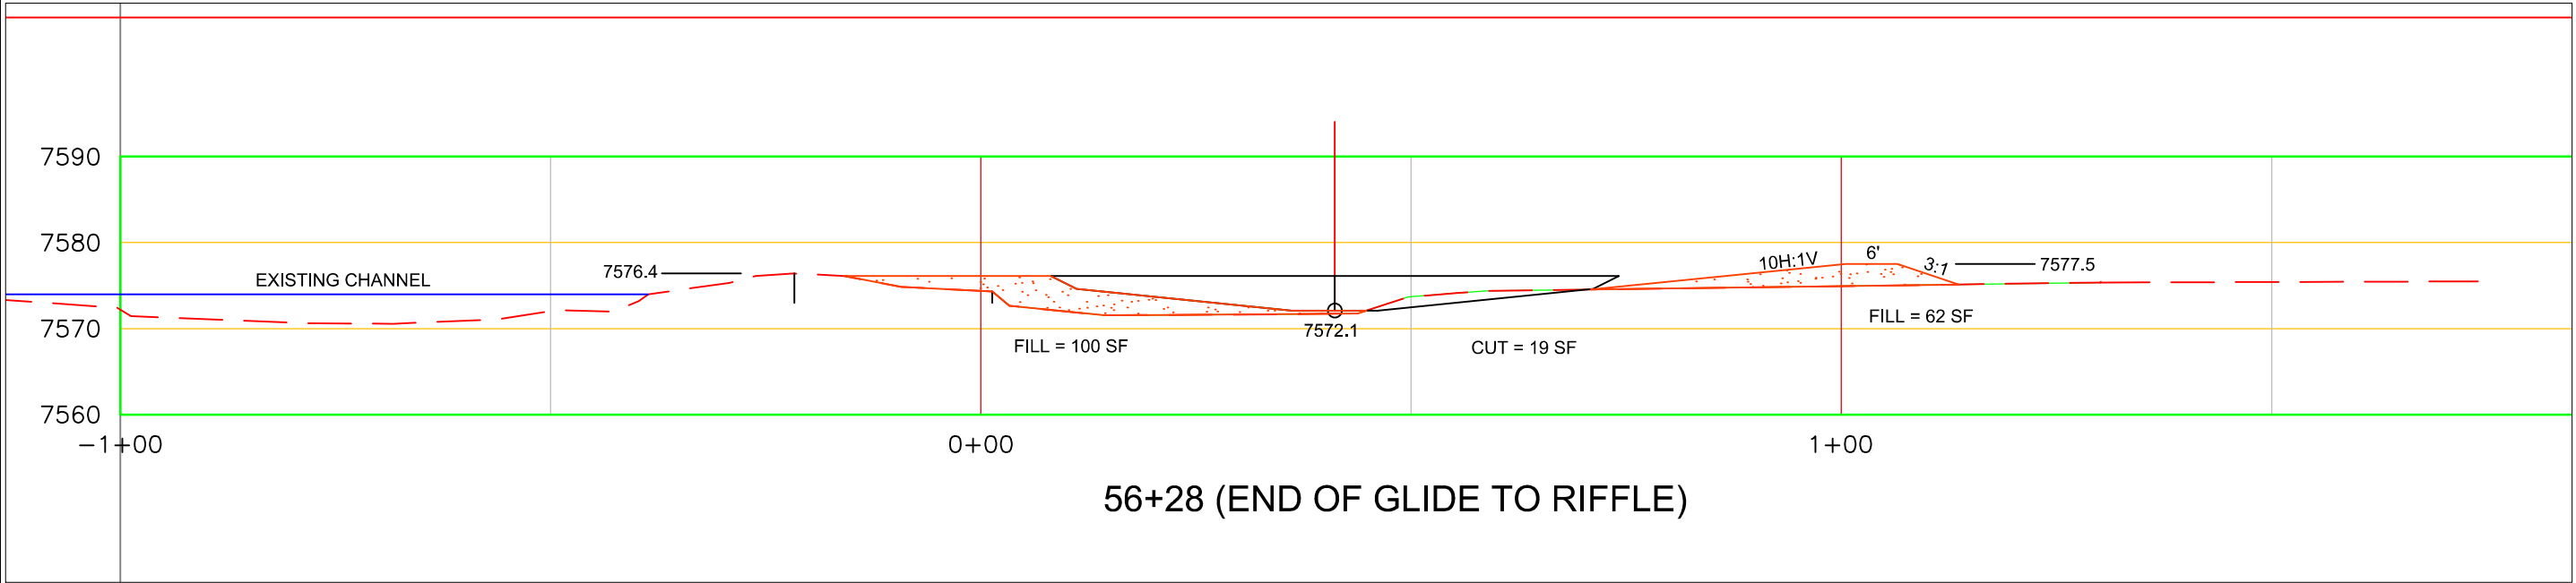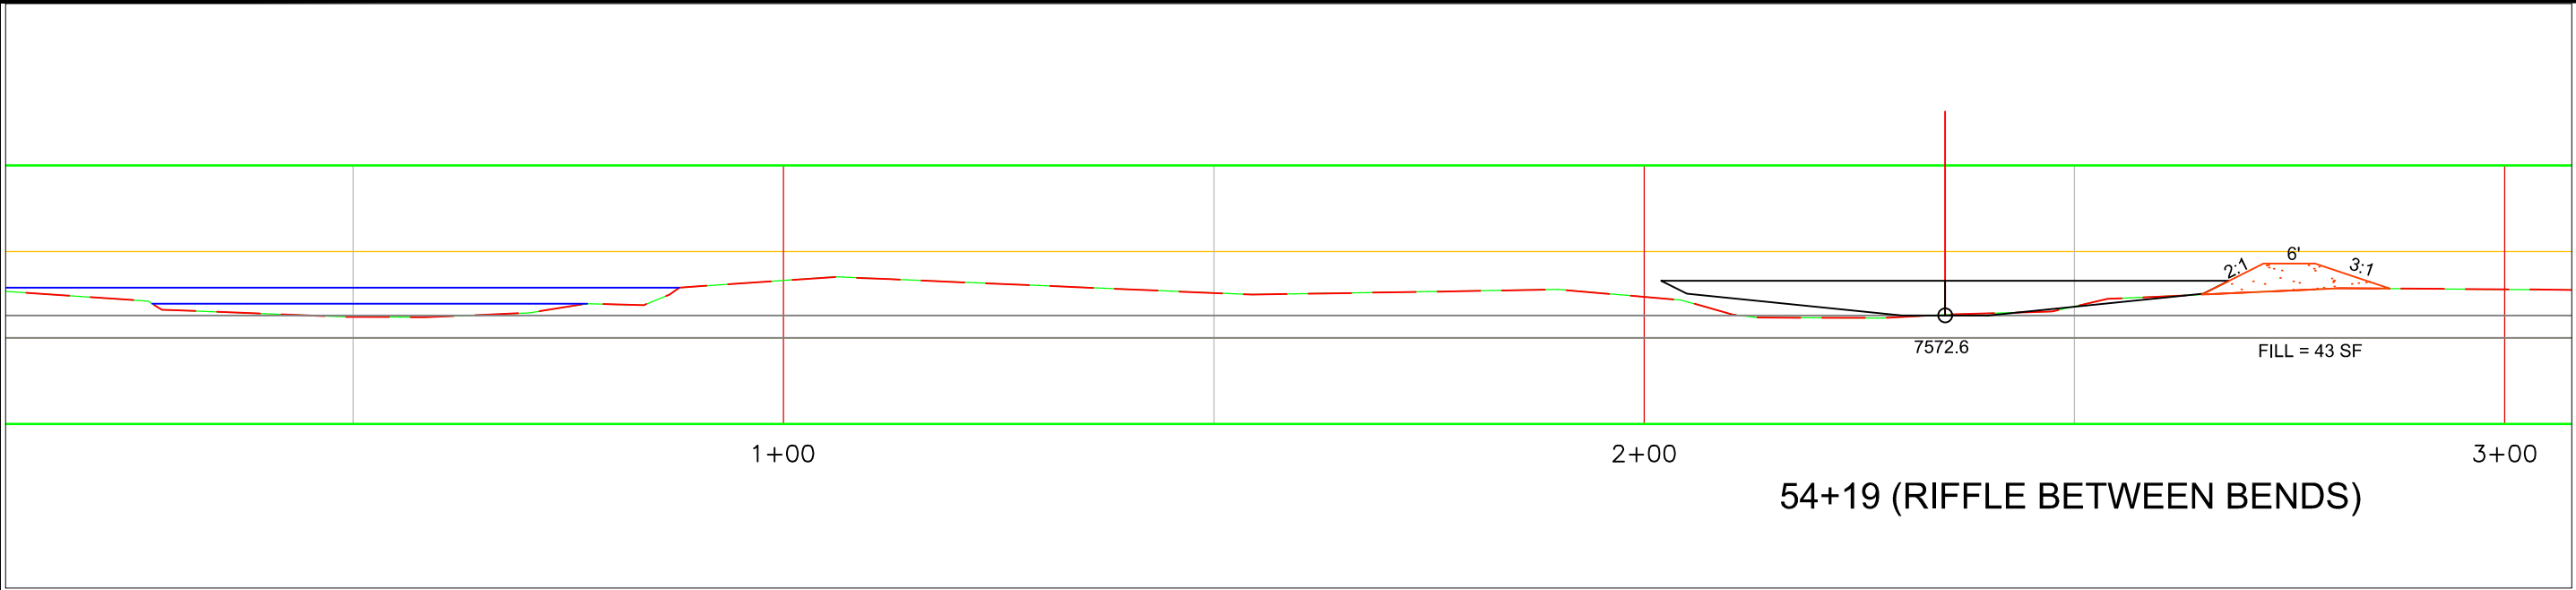

Designed by:	TJ BURR	Date	3/28/2020
Drawn by:	TJ BURR		5/29/2020
Checked by:	M. GUTEKUNST		/ /
Approved by:	J. ANDREWS		/ /

TOMICHI CREEK
TOMICHI CREEK LOWER REACH SITE
STREAM RESTORATION
CHANNEL SECTIONS 3



United States
Department of
Agriculture






Natural Resources
Conservation Service

JOB CLASS:
V

SHEET REVISED:
3/29/2020

SHEET 09 OF 17

DESIGN DRAWINGS (REV: 5/29/2020)

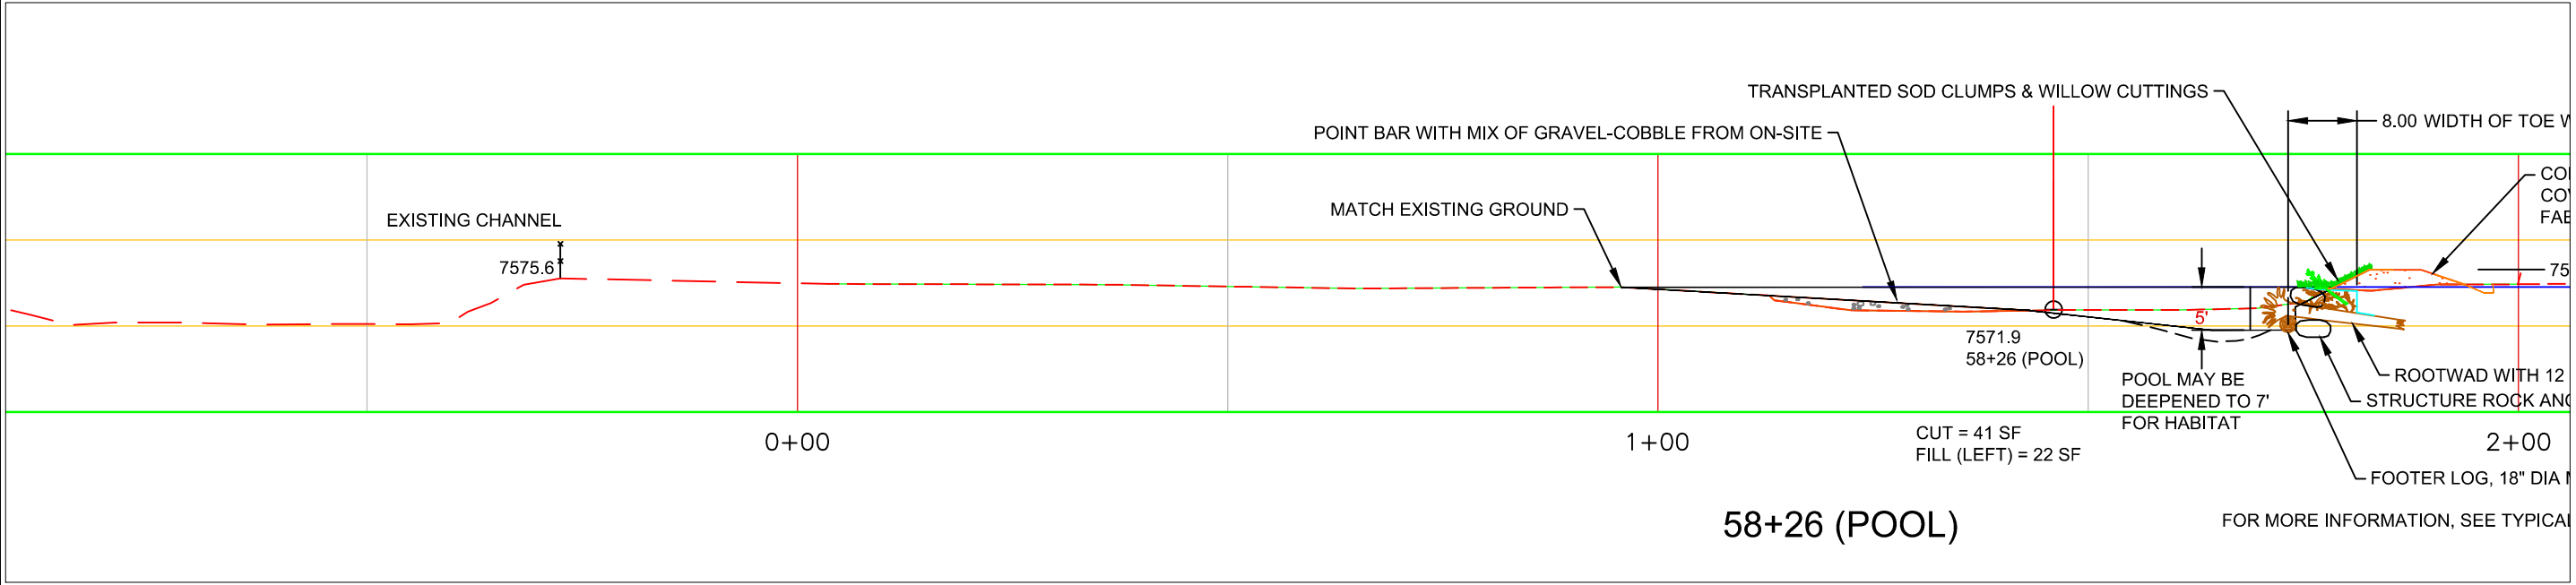
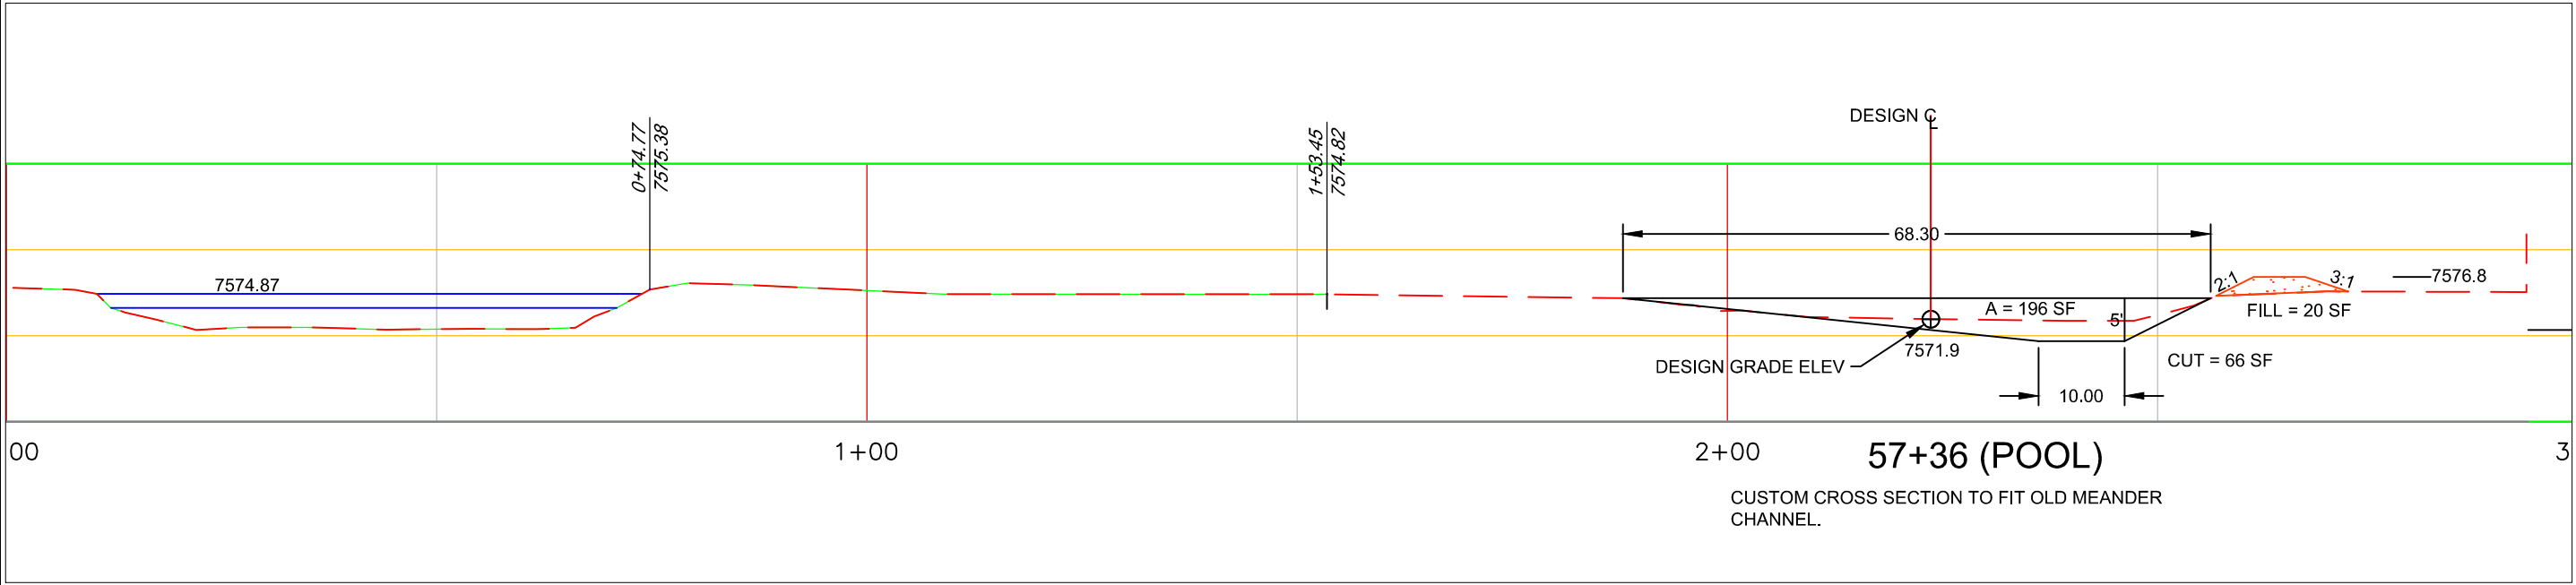
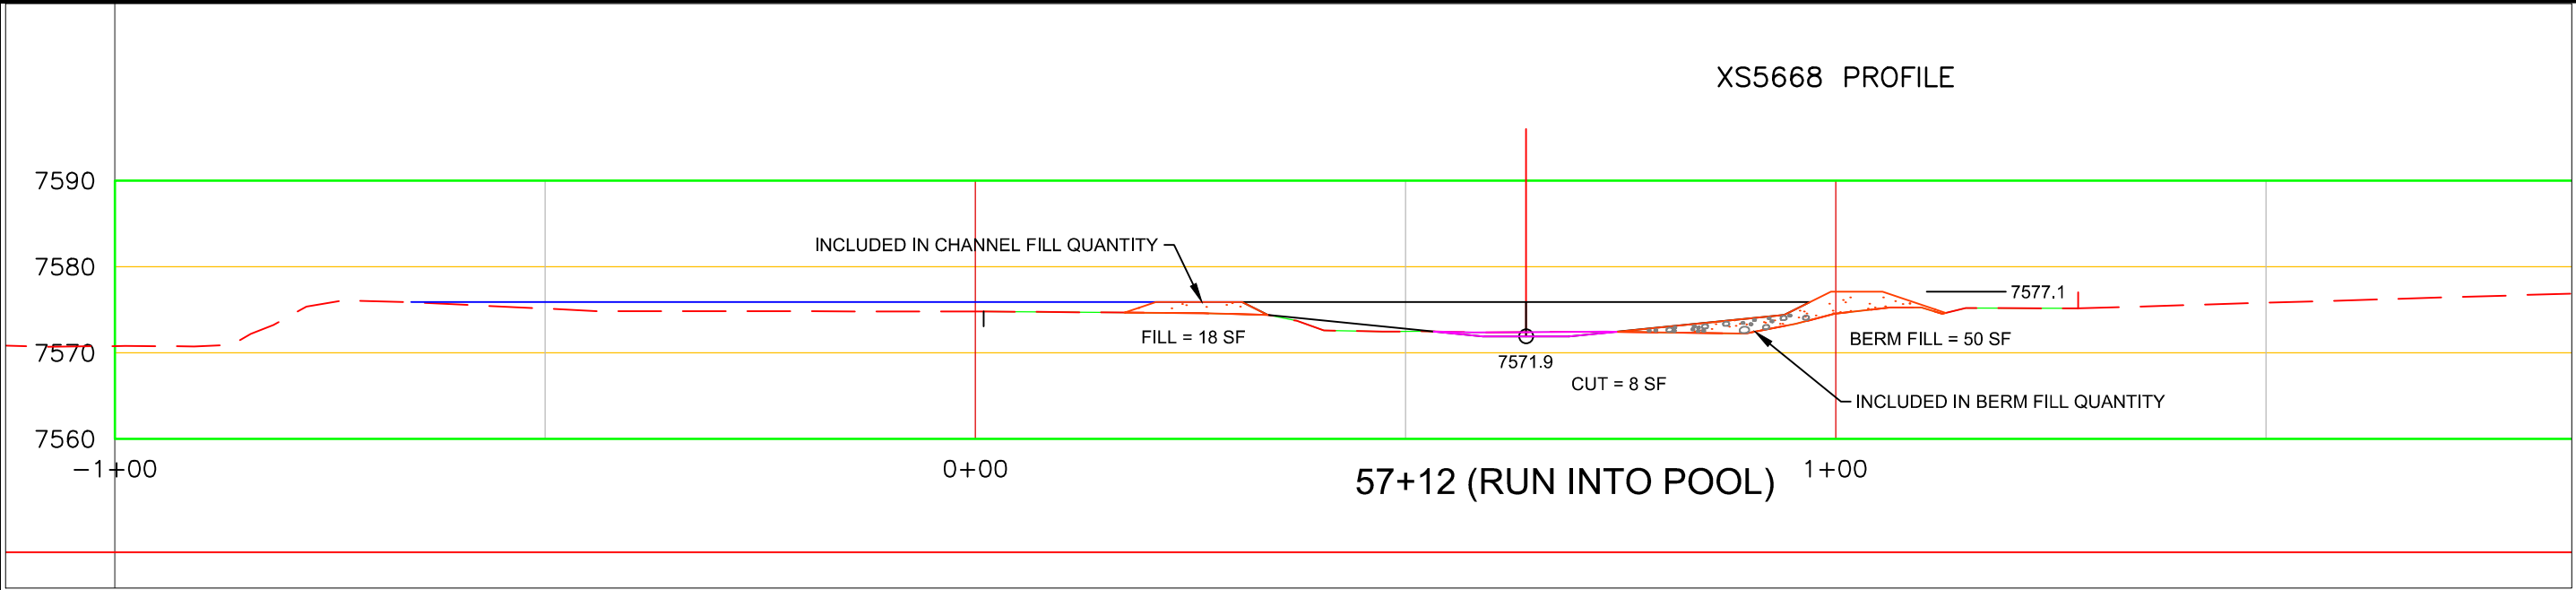


Date	3/28/2020
TJ BURR	
Designed by:	TJ BURR
Drawn by:	TJ BURR
Checked by:	M. GUTEKUNST
Approved by:	J. ANDREWS

TOMICHI CREEK
TOMICHI CREEK LOWER REACH SITE
STREAM RESTORATION
CHANNEL SECTIONS 4

United States Department of Agriculture USDA Natural Resources Conservation Service	JOB CLASS: V
	SHEET REVISED: 3/29/2020
	SHEET 10 OF 17


DESIGN DRAWINGS (REV: 5/29/2020)

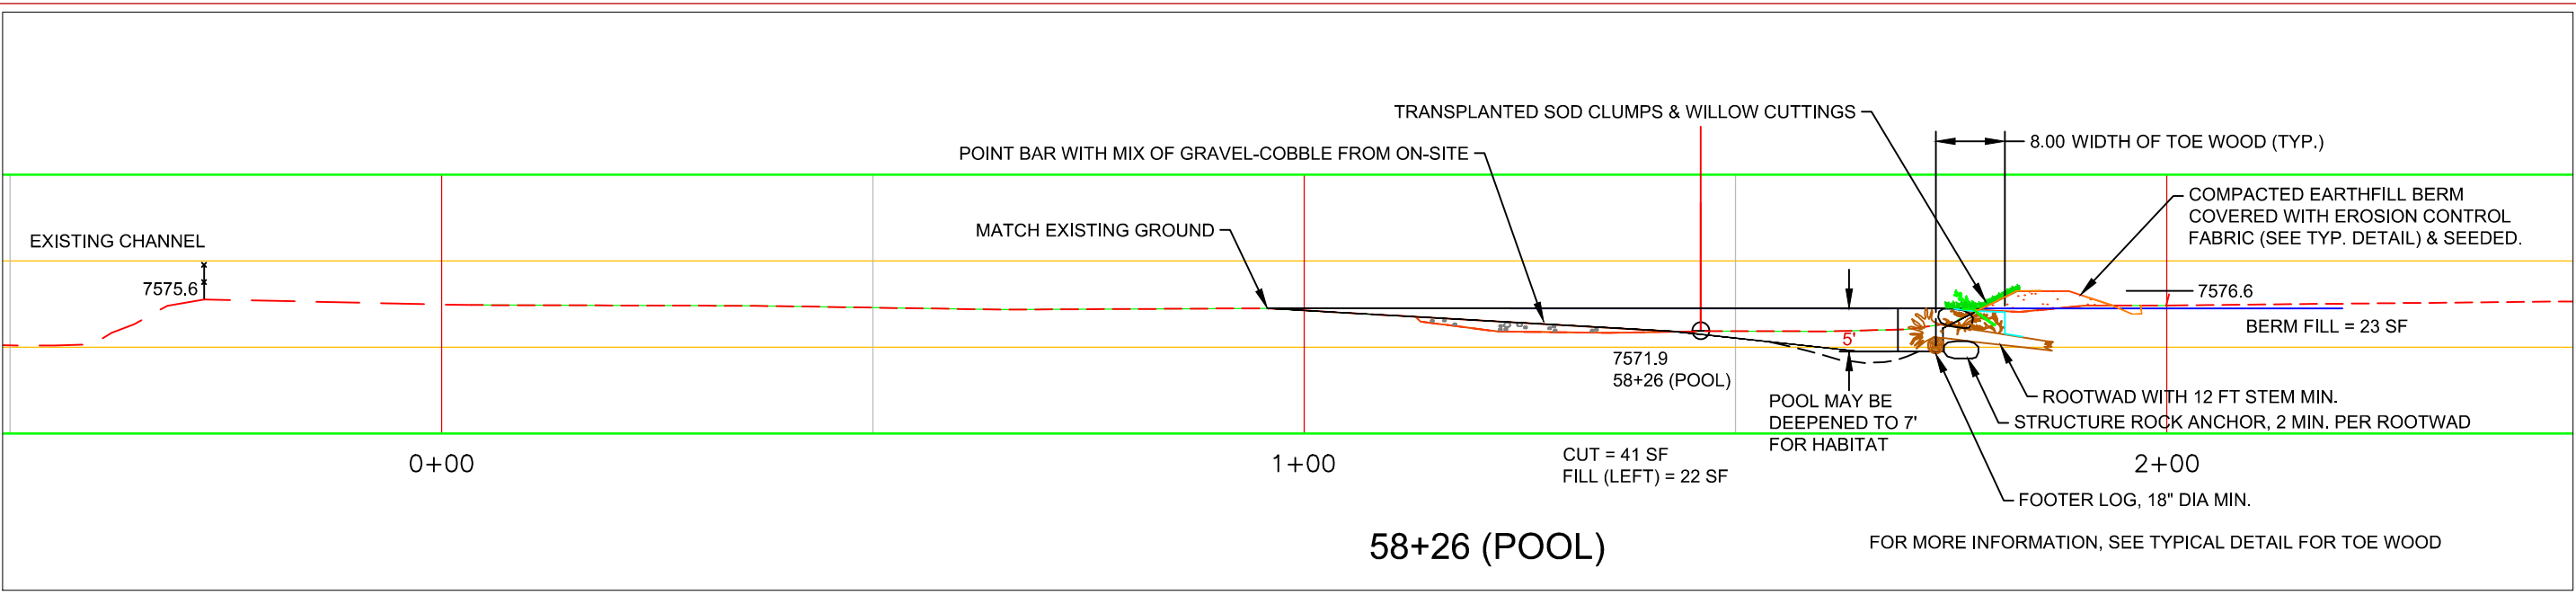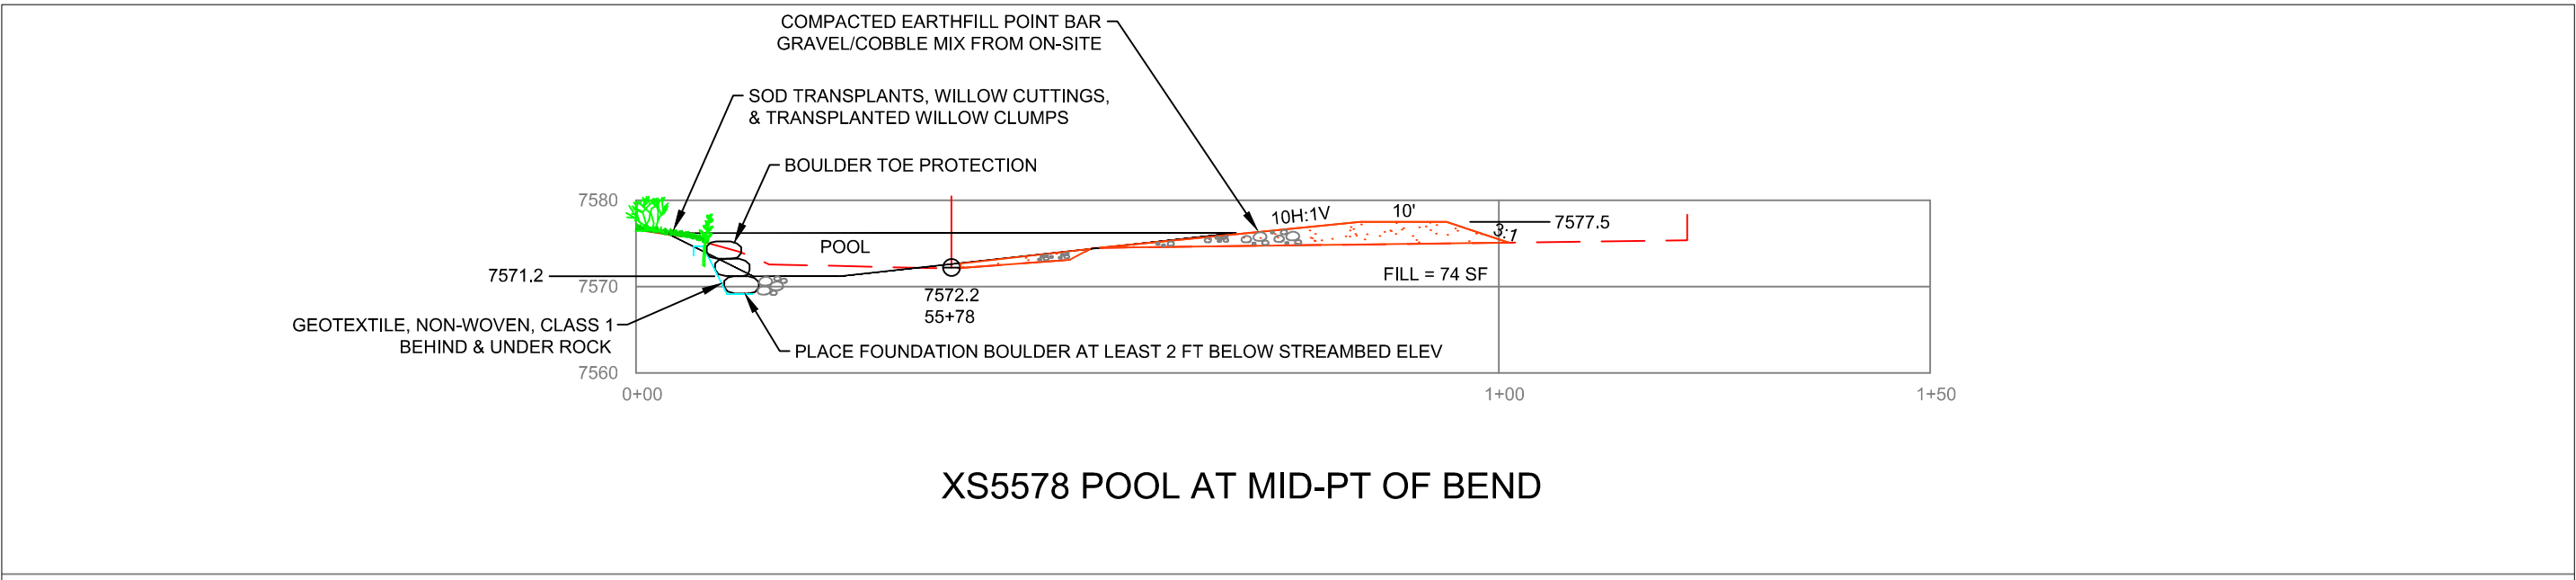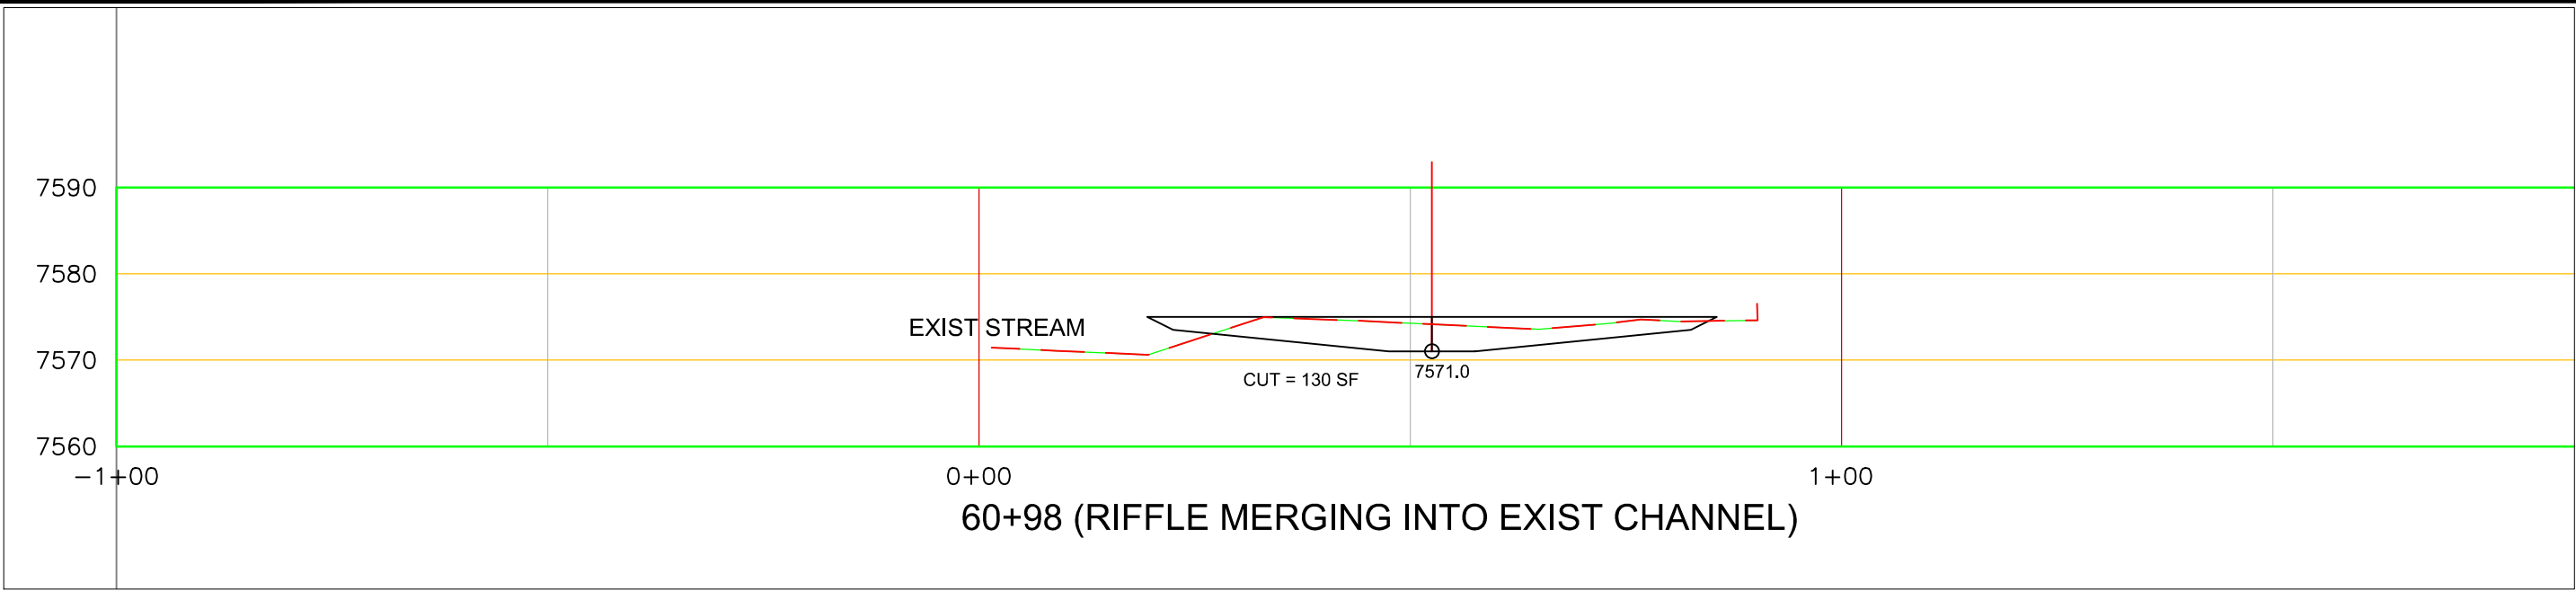

Designed by:	TJ BURR	Date	3/28/2020
Drawn by:	TJ BURR		5/29/2020
Checked by:	M. GUTEKUNST		/ /
Approved by:	J. ANDREWS		/ /

TOMICHI CREEK
TOMICHI CREEK LOWER REACH SITE
STREAM RESTORATION
CHANNEL SECTIONS 5

United States Department of Agriculture USDA Natural Resources Conservation Service	JOB CLASS: V
	SHEET REVISED: 4/2/2020
	SHEET 11 OF 17

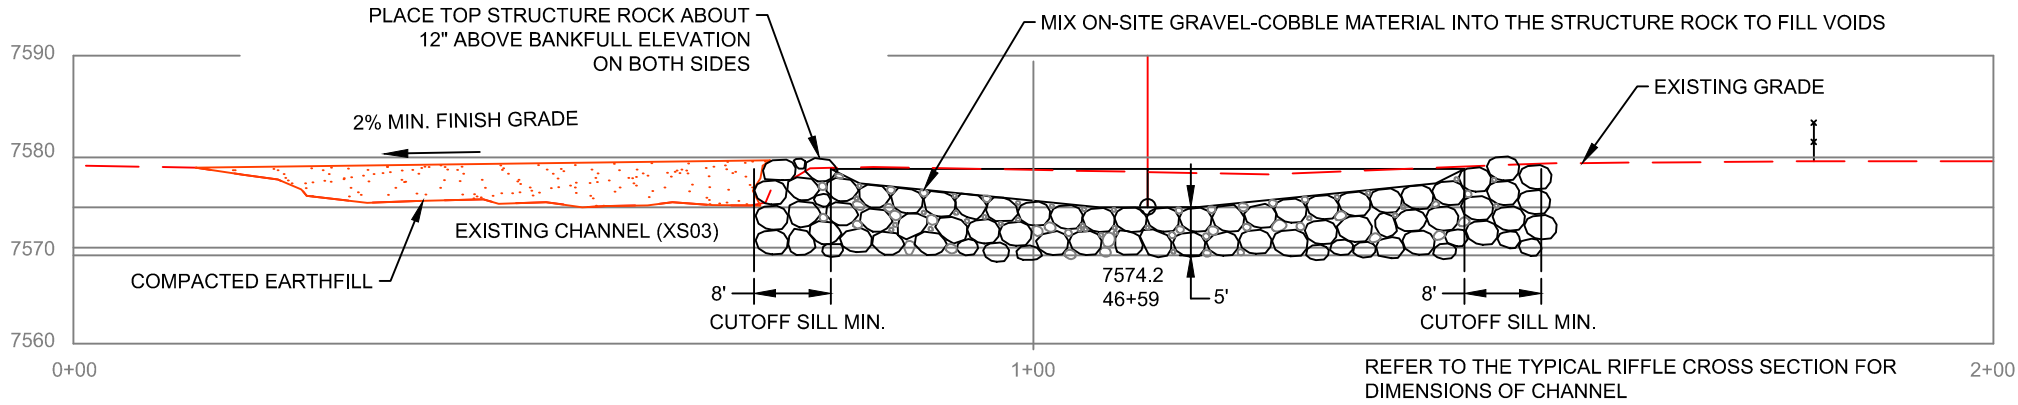

46+59 (CONSTRUCTED RIFFLE CREST)


Designed by:	TJ BURR	Date	3/28/2020
Drawn by:	TJ BURR		5/29/2020
Checked by:	M. GUTEKUNST		___/___/___
Approved by:	J. ANDREWS		___/___/___

TOMICHI CREEK
TOMICHI CREEK LOWER REACH SITE
STREAM RESTORATION
CHANNEL SECTIONS 6



JOB CLASS:
V
SHEET REVISED:
4/2/2020
SHEET 12 OF 17

DESIGN DRAWINGS (REV: 5/29/2020)

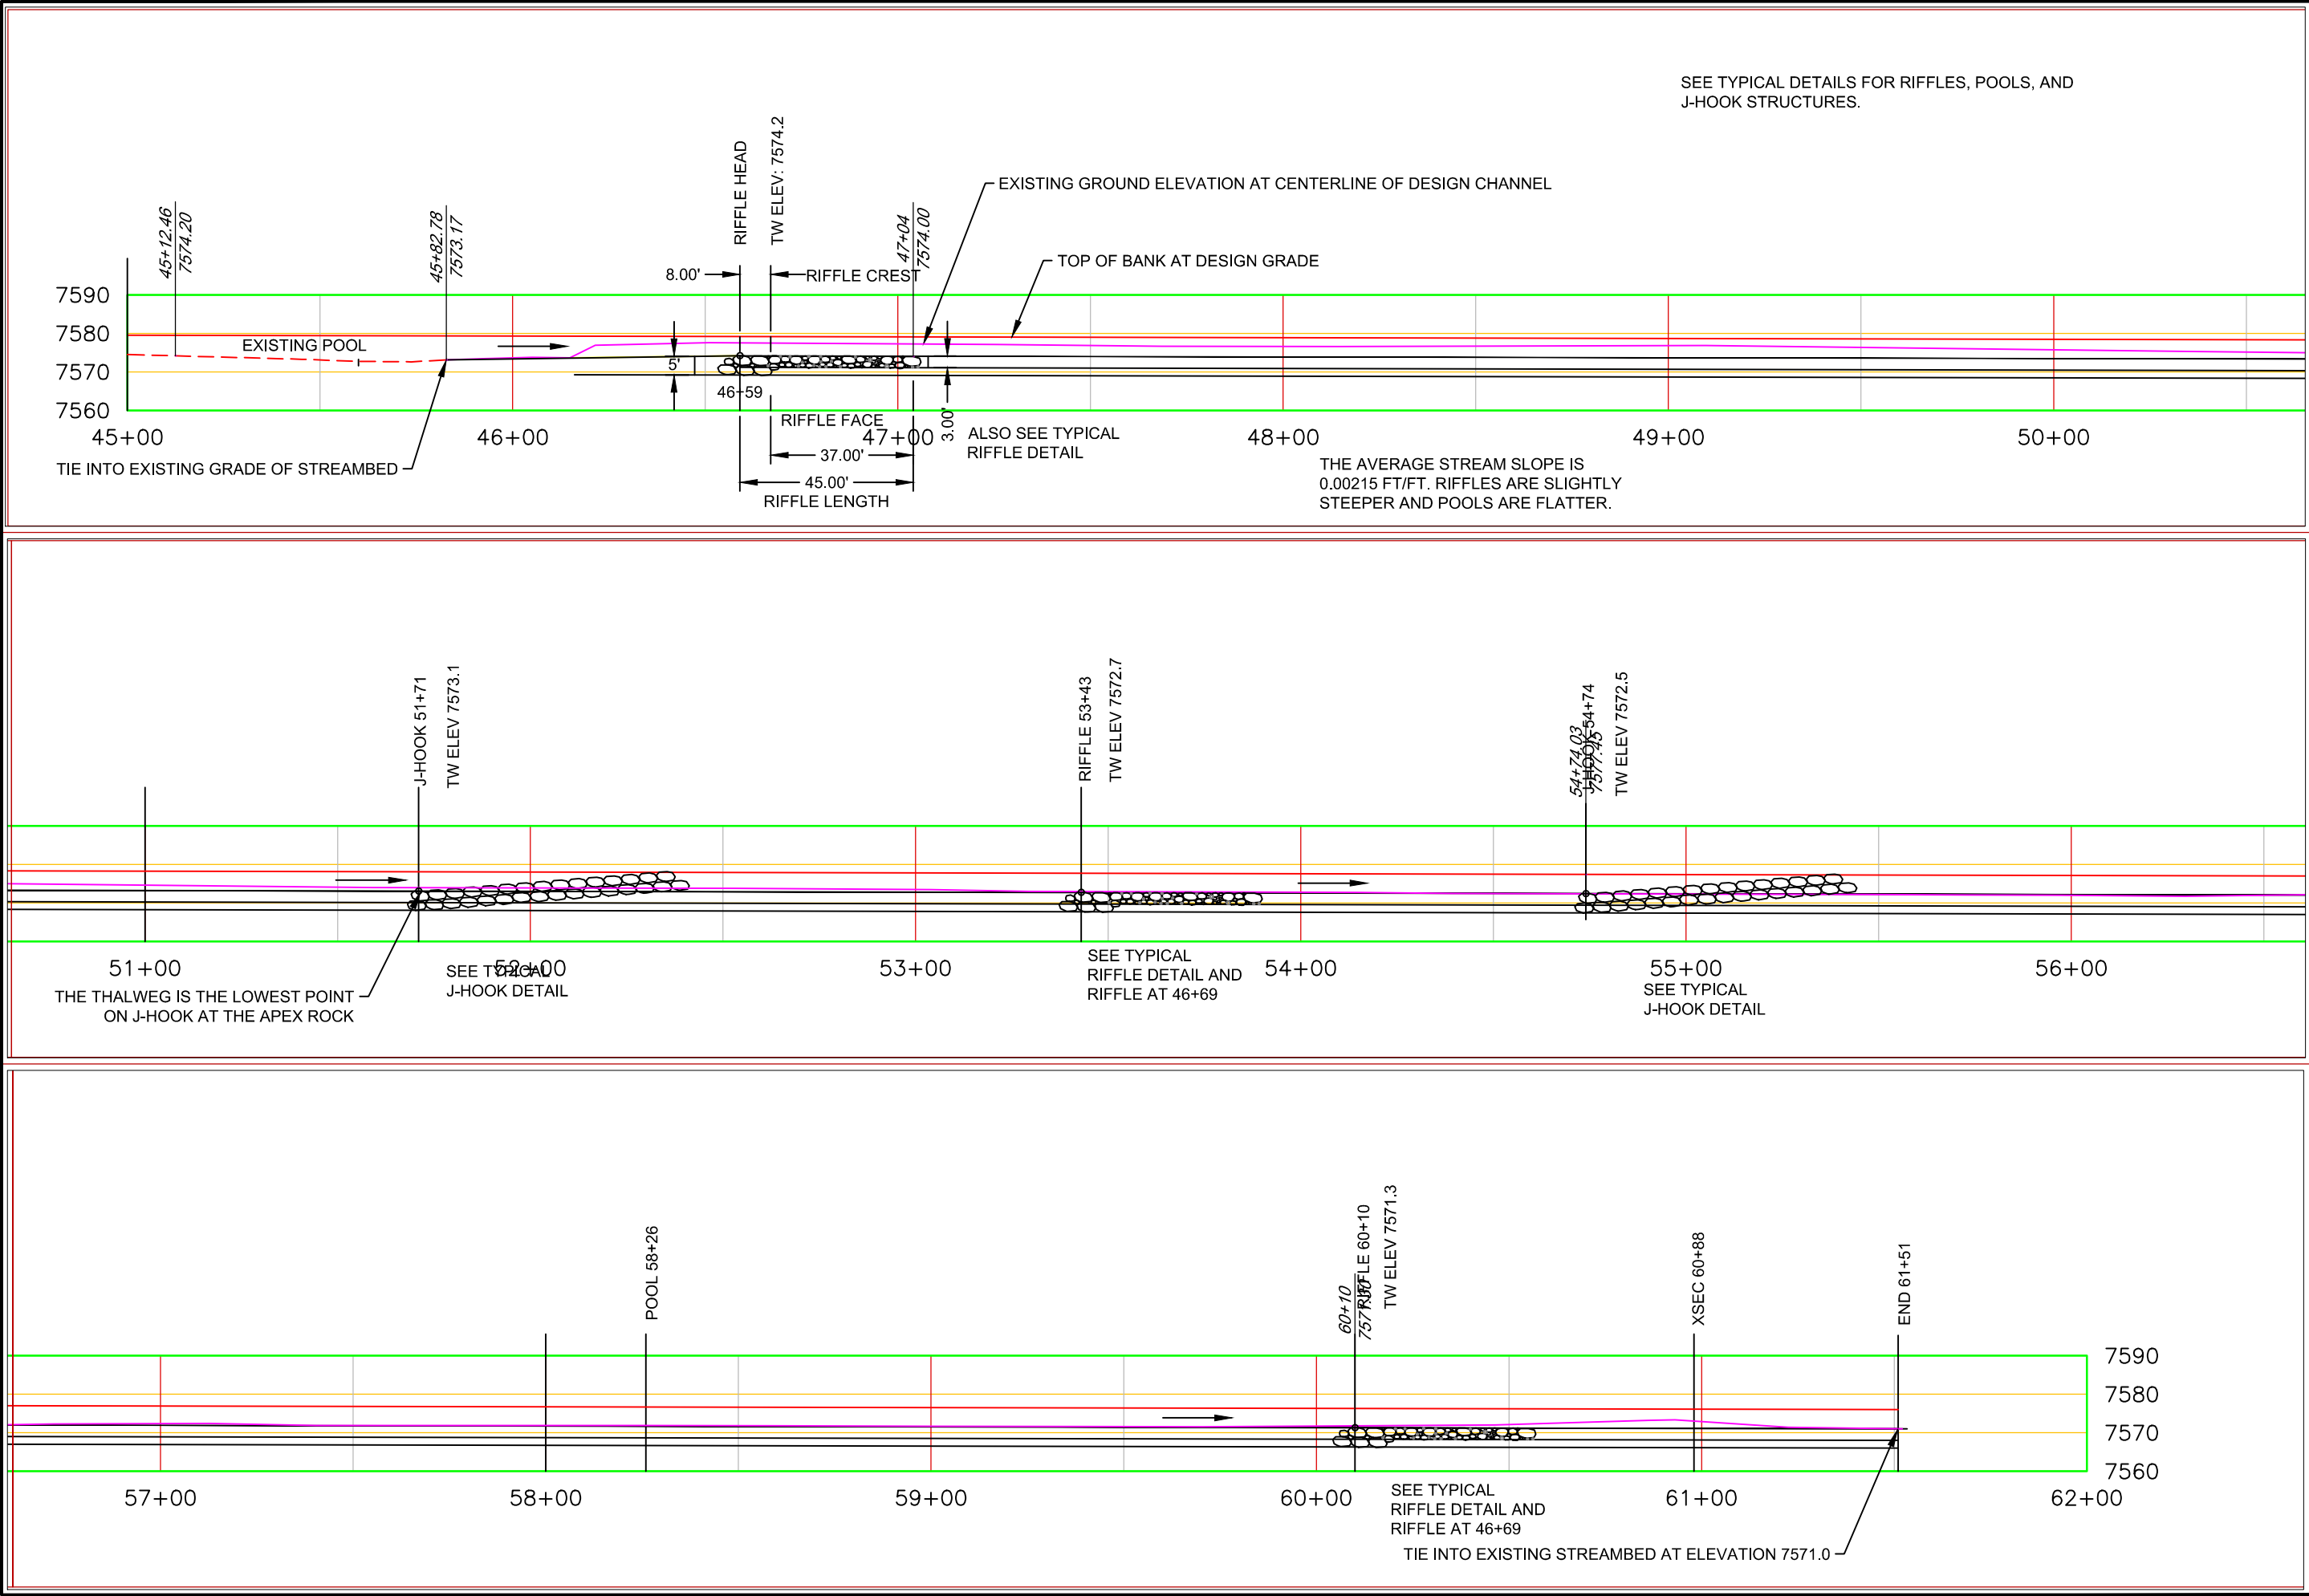

Designed by:	TJ BURR	Date	3/28/2020
Drawn by:	TJ BURR		5/29/2020
Checked by:	M. GUTEKUNST		___/___/___
Approved by:	J. ANDREWS		___/___/___

USDA

United States
Department of
Agriculture

Natural Resources
Conservation Service

TOMICHI CREEK
TOMICHI CREEK LOWER REACH SITE
STREAM RESTORATION

CHANNEL PROFILE


JOB CLASS:
V

SHEET REVISED:
4/2/2020

SHEET 13 OF 17

FILE NAME: Drawings_Tomichi_Lower.dwg


PRINT DATE-TIME: May 29, 2020 - 5:15 PM

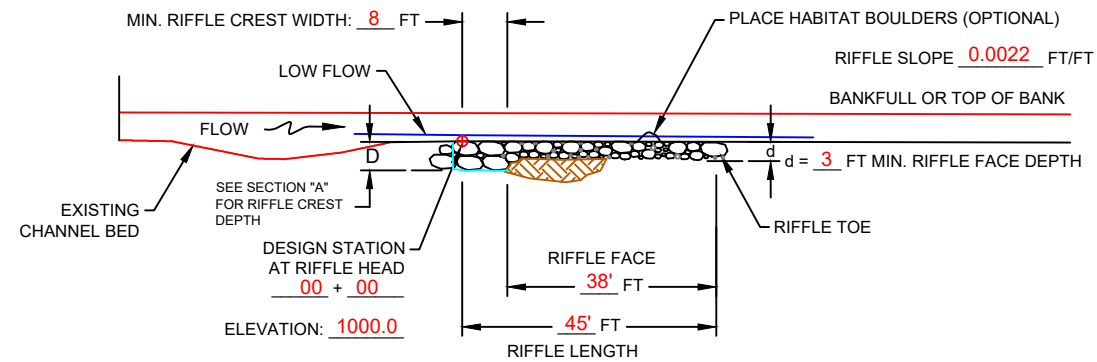

PROFILE VIEW
(ALONG CENTERLINE OF RIFFLE)


- NOTES:**

1. PROVIDE ROCK FROM A CDOT-APPROVED QUARRY OR ENGINEER-APPROVED SOURCE.
2. PLACE ROCKS SO THEY ARE INTERLOCKED AND ORIENTED TO MINIMIZE THE IMPACT FROM THE FLOW. FOR INDIVIDUAL BOULDERS EXPOSED TO THE FLOW, NARROW END SHOULD POINT UPSTREAM AND LENGTH SHOULD BE PARALLEL TO THE FLOW.
3. SEED, MULCH, AND RESTORE DISTURBED AREAS TO PRE-EXISTING CONDITIONS OR BETTER.

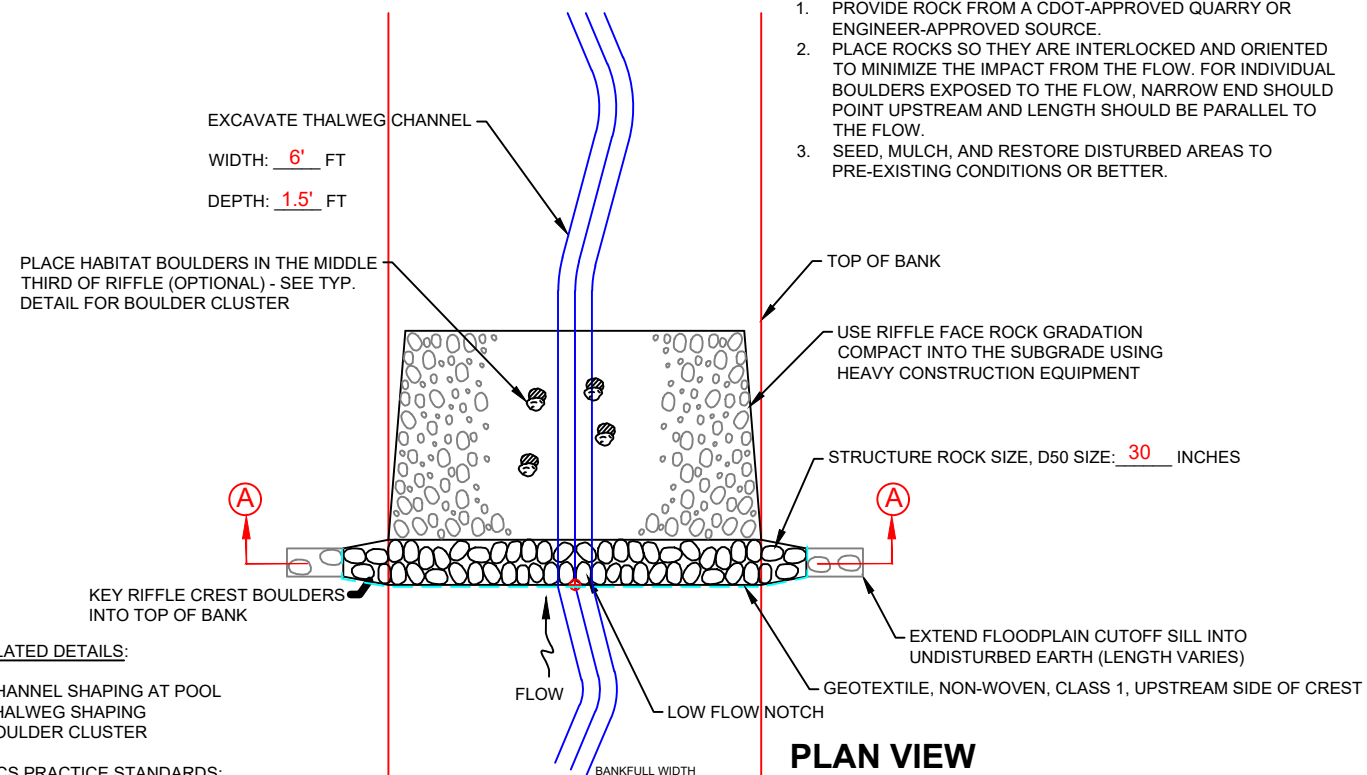


TYPICAL RIFFLE DETAIL TYPE "B"

NOT TO SCALE

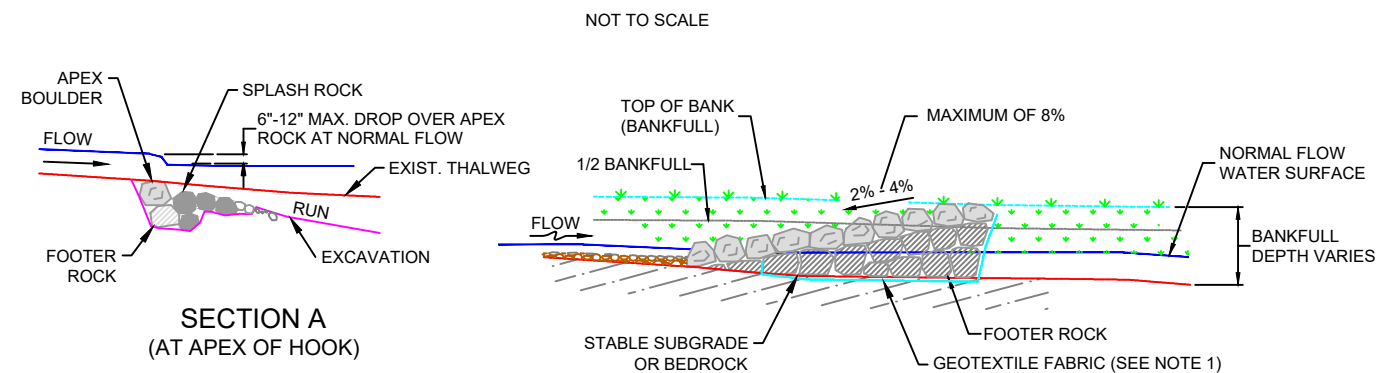


TYPICAL J-HOOK VANE DETAIL


NOT TO SCALE

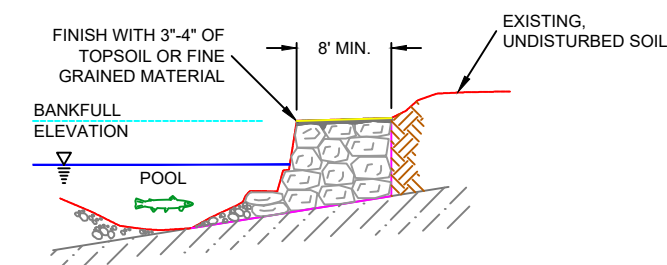

SECTION A
(AT APEX OF HOOK)

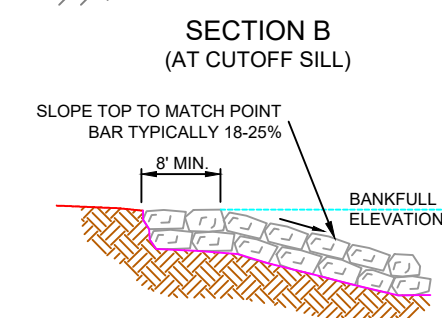

SECTION B
(AT CUTOFF SILL)

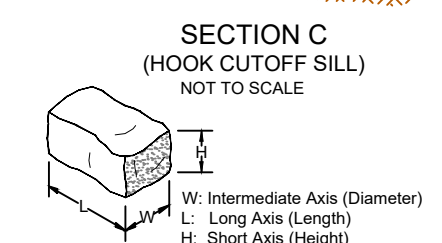

SECTION C
(HOOK CUTOFF SILL)
NOT TO SCALE


W: Intermediate Axis (Diameter)
L: Long Axis (Length)
H: Short Axis (Height)

STRUCTURE ROCK SIZE				
	Representative Size			
	W or Dia (Feet)	Length (Feet)	Height (Feet)	Weight (Ton)
Minimum	2.8	4.2	2.2	1.83
Average (D50)	3.2	4.8	2.6	2.78

Assumed Rock Density: 165 LB/CU-FT

ROCK NOTES:


- A. PROVIDE A RANGE OF ROCK SIZES FOR FLEXIBILITY TO MEET DESIGN GRADES & LINES. AT LEAST 80% OF THE ROCK SHALL MEET OR EXCEED THE AVERAGE SIZE ROCK REQUIREMENTS; UP TO 15% OF ROCK MAY BE IN THE MINIMUM TO AVERAGE SIZE CATEGORY; AND 5% MAY BE SMALLER FRAGMENTS FOR CHINKING USE.
- B. SMALLER HEIGHT ROCKS ARE REQUIRED TO TAPER STRUCTURES AT APEX ON BEDROCK. FOOTER ROCKS SHALL MEET STRUCTURE ROCK REQUIREMENTS.
- C. FOR MAIN STRUCTURE ROCK, SILL, AND FOOTER ROCK, THE ROCK SOURCE SHALL BE FROM AN ACCEPTABLE CDOT QUARRY OR FROM ENGINEER APPROVED SOURCE.
- D. ON-SITE COBBLE AND BOULDERS MAY BE USED TO FILL VOIDS AND FOR SPLASH ROCKS, BUT NOT FOR USE AS ANY MAIN STRUCTURE ROCK.

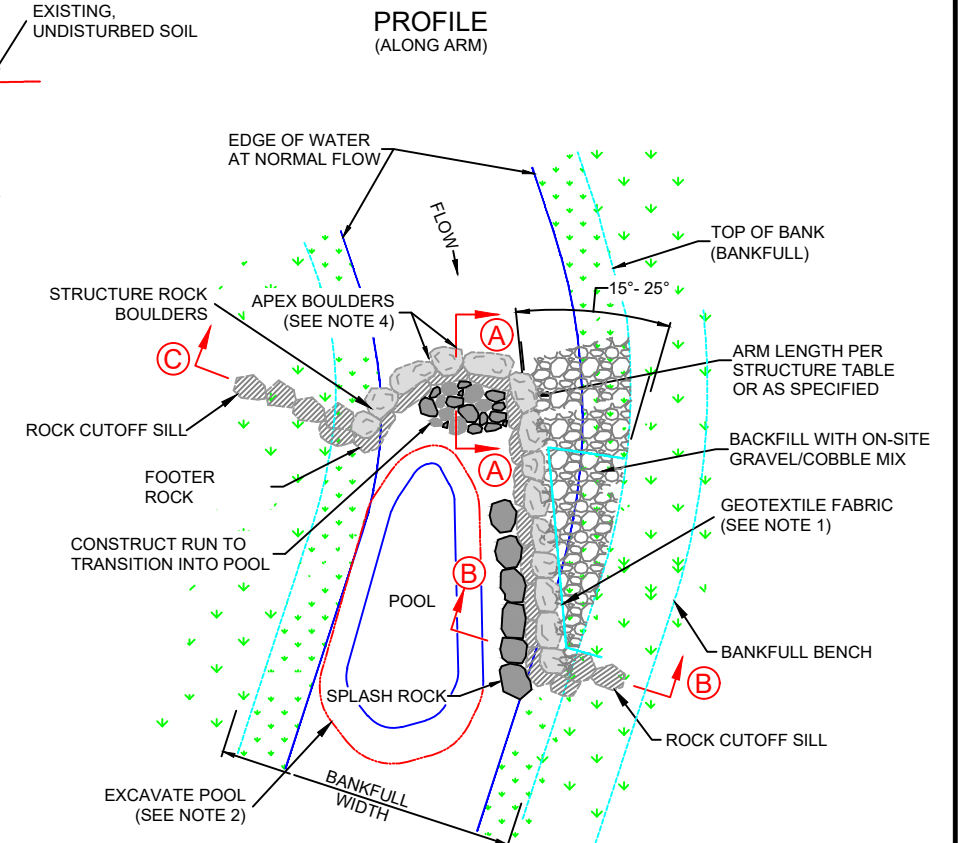

PLAN VIEW

- NOTES:

1. USE CLASS I, NON-WOVEN GEOTEXTILE FABRIC AS DESCRIBED IN THE SPECIFICATIONS. PLACE GEOTEXTILE BEHIND THE ARM (UPSTREAM SIDE), DRAPED FROM TOP OF ROCK STRUCTURE TO BOTTOM OF FOOTER ROCK AND EXTEND A MINIMUM OF HALF THE TRENCH BOTTOM WIDTH. TRIM EXCESS OR VISIBLE FABRIC.
2. ON BEDROCK STREAM BEDS , EXCAVATE POOL BEFORE INSTALLING STRUCTURE.
3. MAXIMUM WATER SURFACE GRADE DROP ACROSS THE APEX OF ROCK HOOK
IS 12 INCHES MEASURED ALONG THE STREAM PROFILE. SEE SECTION A.
4. BUTT THE APEX BOULDERS TIGHTLY AGAINST EACH OTHER. USE SHAPE OF ROCKS TO PROVIDE A LOW FLOW GAP NEAR THE MIDDLE.

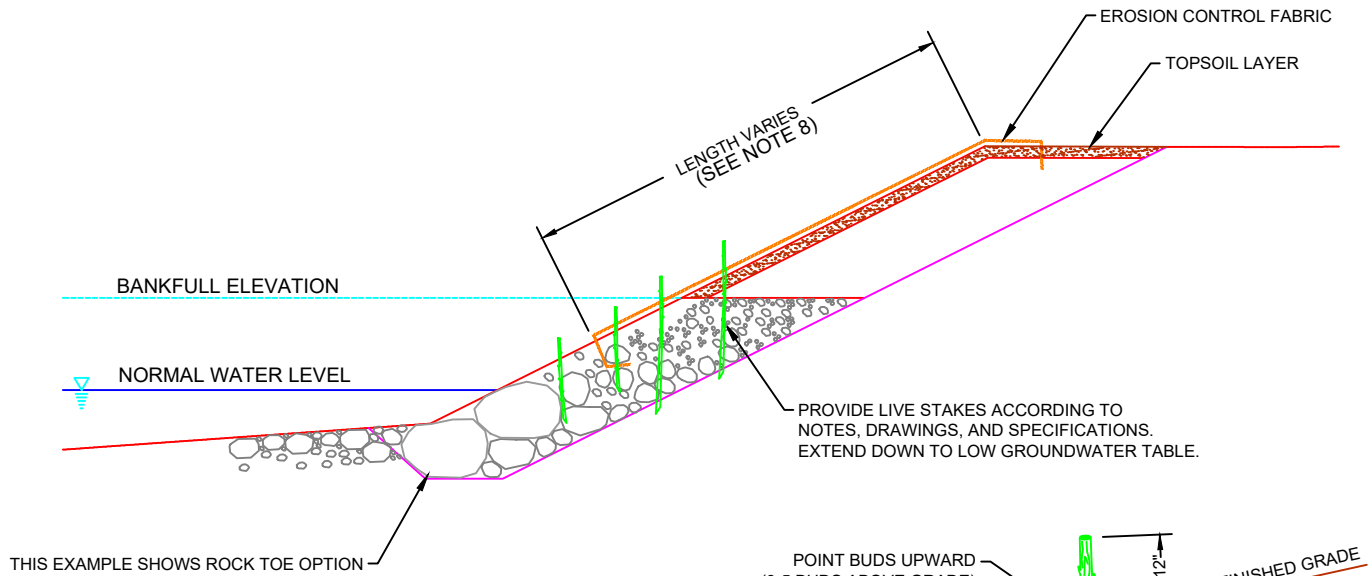

LIVE STAKE NOTES:

1. SPECIES SELECTION MAY VARY DUE TO AVAILABILITY. USE ONLY NATIVE SPECIES.
2. DO NOT ALLOW STAKES TO DRY OUT.
3. PLANT WHILE DORMANT IN LATE FALL OR EARLY SPRING, BUT NOT ON FROZEN GROUND.
4. BEFORE PLANTING, SOAK CUTTINGS AND STAKES IN WATER FOR 5-7 DAYS (PREFERRED), OR FOR A MINIMUM OF 24 HOURS. REMOVE THE STAKES FROM WATER BEFORE ROOT TIPS EMERGE.
5. DRIVE A PILOT HOLE IN FIRM SOIL AT RIGHT ANGLES WITH BUDS ORIENTED UP.
6. TAMP SOIL AROUND LIVE STAKES TO ELIMINATE AIR POCKETS.
7. PLANT STAKES RANDOMLY OR ON TRIANGULAR SPACING.
8. CUT THE BASAL OR BUTT ENDS AT AN ANGLE FOR EASY INSERTION INTO THE SOIL. CUT THE TOP SQUARE OR BLUNT.
9. LIVE STAKE PLACEMENT ON BANK: FROM NORMAL WATER LEVEL UP TO TOP OF BANK. USE STAKES LONG ENOUGH TO REACH LOW GROUNDWATER TABLE. USE WATER TOLERANT SPECIES BELOW NORMAL FLOW LINE.
10. RECOMMENDED SPECIES FOR THIS SITE (CHOOSE AT LEAST 3 AS AVAILABLE FROM NURSERY OR OTHER APPROVED SOURCES). IF NOT LISTED BELOW, REFER TO PLANTING PLANS OR RECOMMENDATIONS FROM PLANTING SPECIALIST:

ROCKY MOUNTAIN WILLOW, NARROWLEAF WILLOW, WHIPLASH WILLOW, COYOTE WILLOW, DRUMMOND'S WILLOW, GEYSER'S WILLOW, COTTONWOOD, OR BLUESTEM WILLOW

DIAMETER RANGE 0.5 TO 1.5 INCHES

LENGTH RANGE 3 TO 4 FEET*

PLANTING DENSITY, EVERY Y FT ON DIAMOND SPACING


* LENGTHS SHORTER THAN 3 FT REQUIRE PRIOR APPROVAL OF NRCS TECH. REPRESENTATIVE. IN SOME CASES A 2 FT LONG STAKE MAY BE ADEQUATE. COMMON LENGTHS ARE 3', 4', & 6', BUT CAN BE UP TO 12'.

TYPICAL USES:

CRITICAL AREA PLANTING FOR STREAMBANK PROTECTION. TYPICALLY USED WITH OTHER CONSERVATION PRACTICES, SUCH AS STREAMBANK PROTECTION AND RIPARIAN BUFFERS.

TYPICAL LIVE STAKE DETAIL
(With Bank Shaping & Rock Toe)

NOT TO SCALE

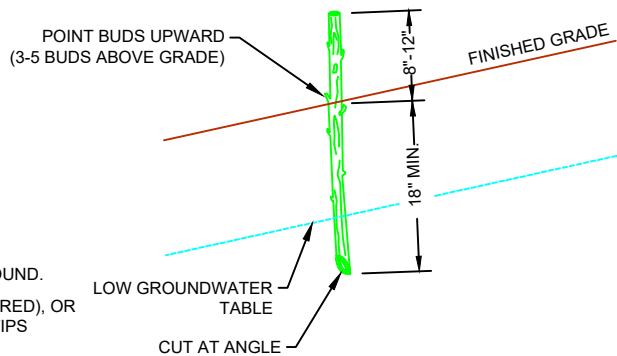


LIVE STAKE CLOSE-UP



50% TO 80% OF LIVE STAKE LENGTH SHOULD BE BELOW FINISH GRADE

ASSOCIATED DETAILS:

- Erosion Control Fabric
- Rock Toe (If Specified)
- Streambank Shaping

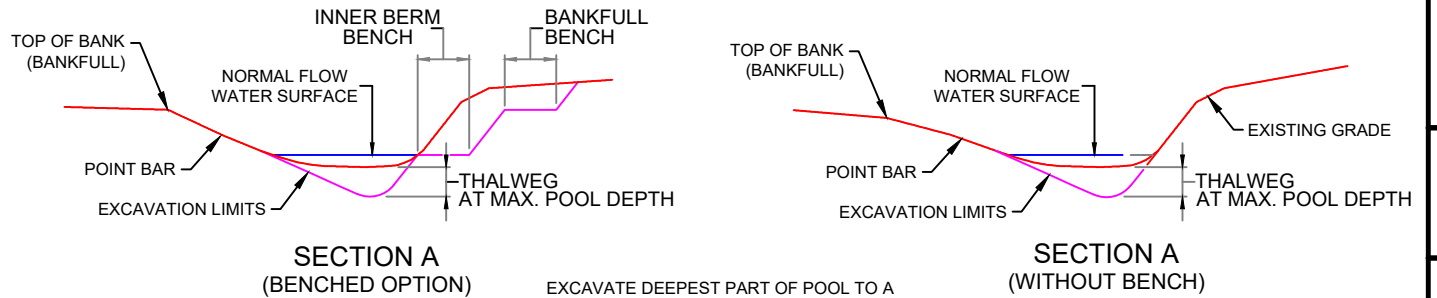

EXCAVATE DEEPEST PART OF POOL TO A MINIMUM DEPTH OF 2 FEET BELOW EXISTING STREAMBED OR DOWN TO BEDROCK.

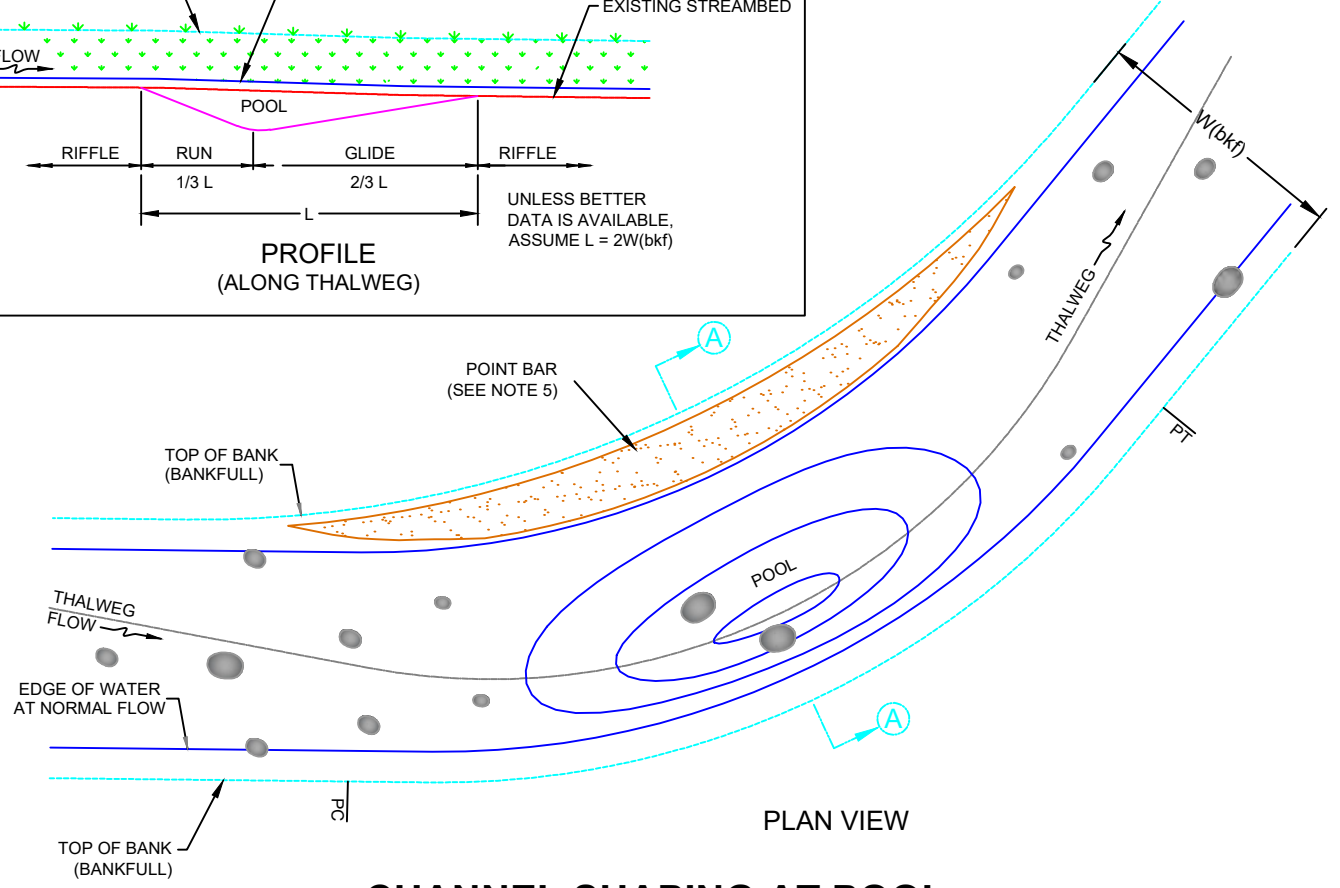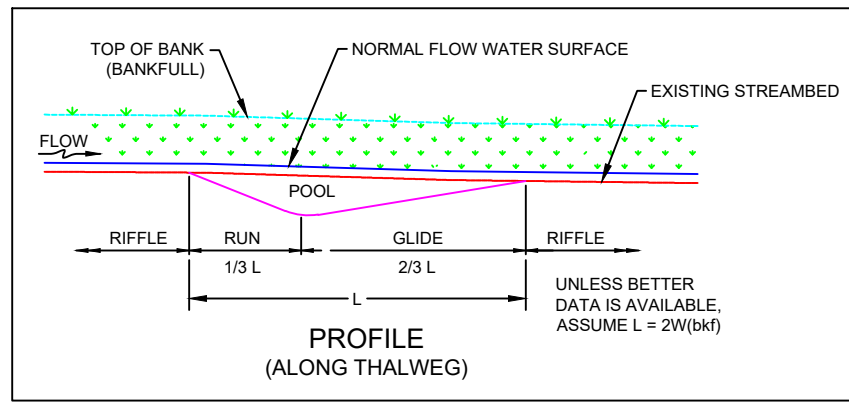

CHANNEL SHAPING AT POOL
TYPICAL DETAIL

NOTES:

1. USE EXCAVATED MATERIAL TO RE-SHAPE BANKS, BUILD POINT BARS, OR FOR BACKFILL OF OTHER WORK.
2. USE THE "BENCHING OPTION" WHENEVER PRACTICAL BASED ON SITE CONSTRAINTS.
3. TYPICAL POOL-TO-POOL SPACING IS EVERY 5-7 BANKFULL WIDTHS.
4. USE THIS DETAIL WITH OTHER STREAM RESTORATION MEASURES TO SHOW FEATURES OF A NATURAL CHANNEL SHAPE.
5. SHAPE THE POINT BAR TO MATCH EXISTING POINT BAR SLOPE OR NEARBY POINT BAR SLOPES. IF NO SLOPE IS AVAILABLE OR SPECIFIED, USE 4H:1V. THE FINISH GRADE OF THE POINT BAR SHOULD BE ROUGH, NOT SMOOTH AND COMPACTED.


NOT TO SCALE

Date	3/28/2020
Designed by:	TJ BURR
Drawn by:	TJ BURR
Checked by:	M. GUTEKUNST
Approved by:	J. ANDREWS


TOMICHI CREEK
TOMICHI CREEK LOWER REACH SITE
STREAM RESTORATION
LIVE STAKES & SHAPING



JOB CLASS:	V
SHEET REVISED:	3/30/2020
SHEET 15 OF 17	

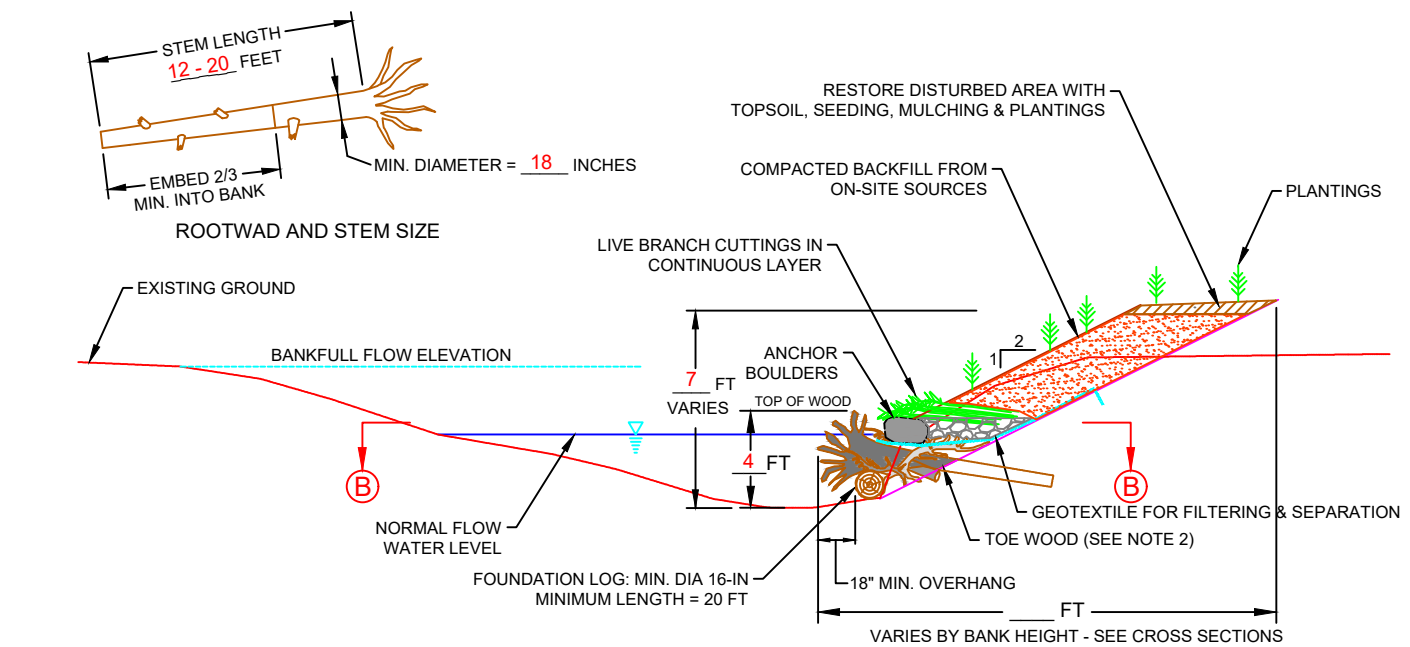

SECTION A

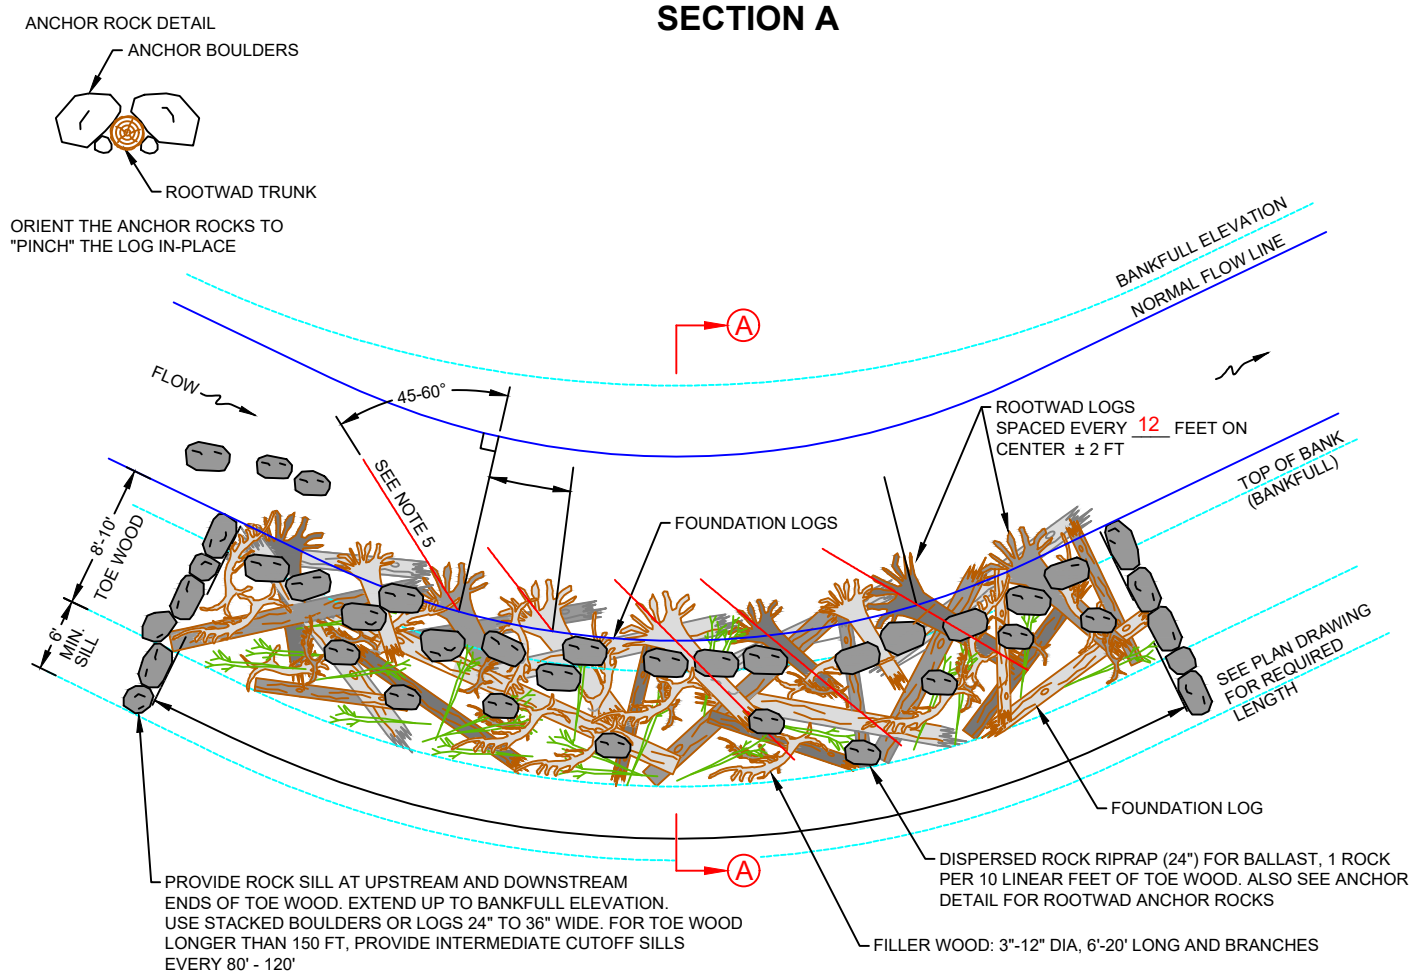


PLAN VIEW B

TOE WOOD DETAIL 1

NOT TO SCALE

NOTES:


1. IF AVAILABLE FROM ON-SITE EXCAVATION, SOD MAT LAYERS MAY BE INCORPORATED TO FINISH SURFACES TO PROVIDE IMMEDIATE VEGETATION.
2. TOE WOOD CONSISTS OF A MIX OF LOGS, BRANCHES, WOODY SHRUBS, AND OTHER WOOD SALVAGED FROM ON-SITE OR IMPORTED. INSTALL THE WOOD AT VARIOUS ANGLES, BUT NOT PARALLEL TO WATER FLOW. LAYER WOOD WITH LARGER MATERIAL ON THE BOTTOM AND FORM A MAT OF BRANCHES ON THE TOP LAYER.
3. PLACE THE TOP LAYER OF WOOD AT OR UP TO 12 INCHES ABOVE NORMAL FLOW ELEVATION.
4. FILL BETWEEN ROOTWAD LOGS WITH MIX OF WOODY DEBRIS & FILLER WOOD.
5. ROOT WADS ARE ANGLED UPSTREAM AT 45-60 DEGREES FROM PERPENDICULAR TO FLOW.

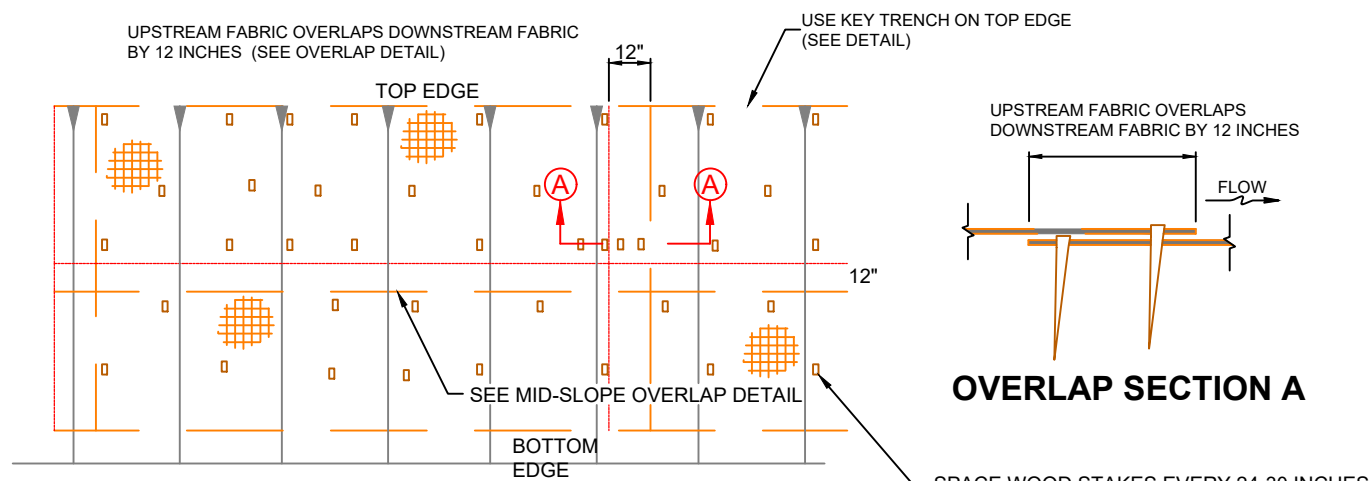

OVERLAP SECTION A




PLAN VIEW

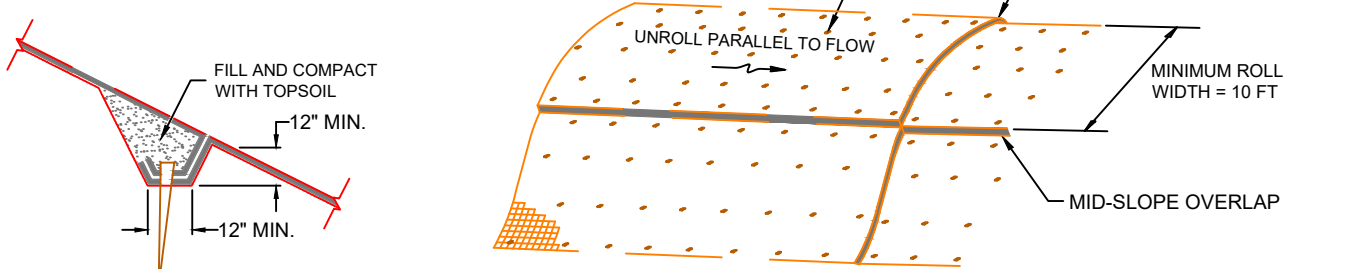

MID-SLOPE OVERLAP DETAIL

ISOMETRIC VIEW

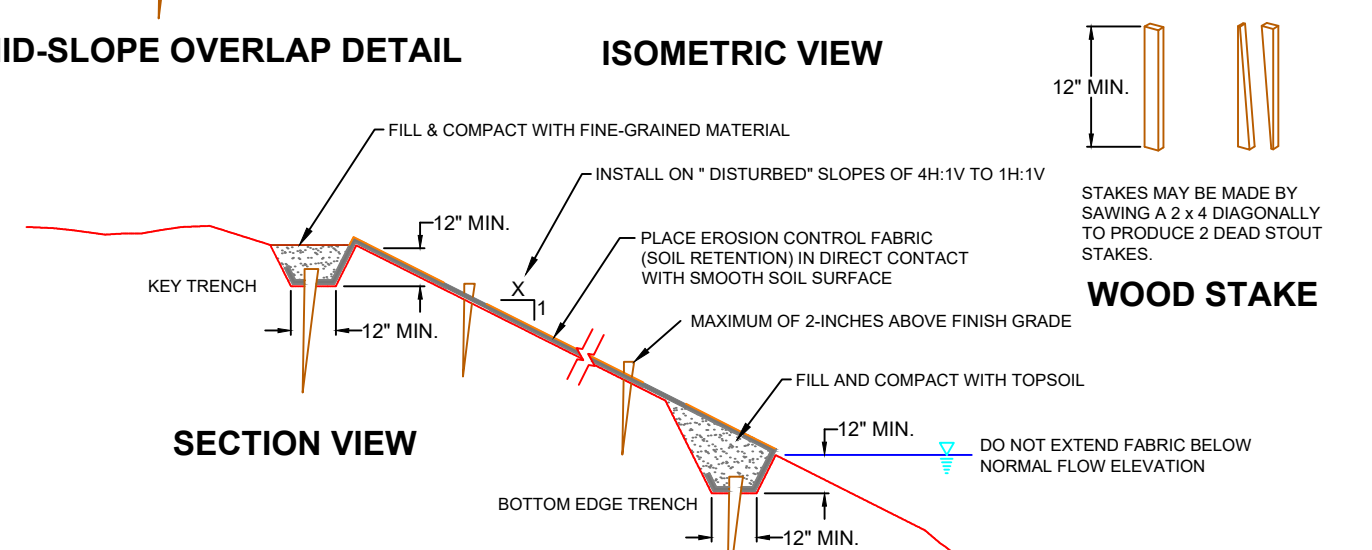

SECTION VIEW

WOOD STAKE

NOTES:

1. USE EROSION CONTROL FABRIC DESCRIBED IN THE SPECIFICATIONS.
2. PREPARE SOIL SURFACE AND INSTALL ACCORDING TO THIS DETAIL, THE PLAN DRAWINGS, AND THE SPECIFICATIONS. SCARIFY THE TOP 6-INCHES OF SOIL, RAKE, AND SEED THE GROUND SURFACE BEFORE INSTALLING FABRIC.
3. REMOVE COBBLE-SIZE ROCK AND LARGER TO PREVENT HAVING VOIDS UNDER THE FABRIC. PLACE FABRIC FOR GOOD CONTACT WITH GROUND.

EROSION CONTROL FABRIC (ECF) DETAIL
(Soil Retention Fabric, Biodegradable)


NOT TO SCALE

Date	3/28/2020
Designed by:	TJ BURR
Drawn by:	TJ BURR
Checked by:	M. GUTEKUNST
Approved by:	J. ANDREWS

TOMICHI CREEK
TOMICHI CREEK LOWER REACH SITE
STREAM RESTORATION
TOE WOOD & ECF




JOB CLASS:	V
SHEET REVISED:	3/31/2020
SHEET 16 OF 17	

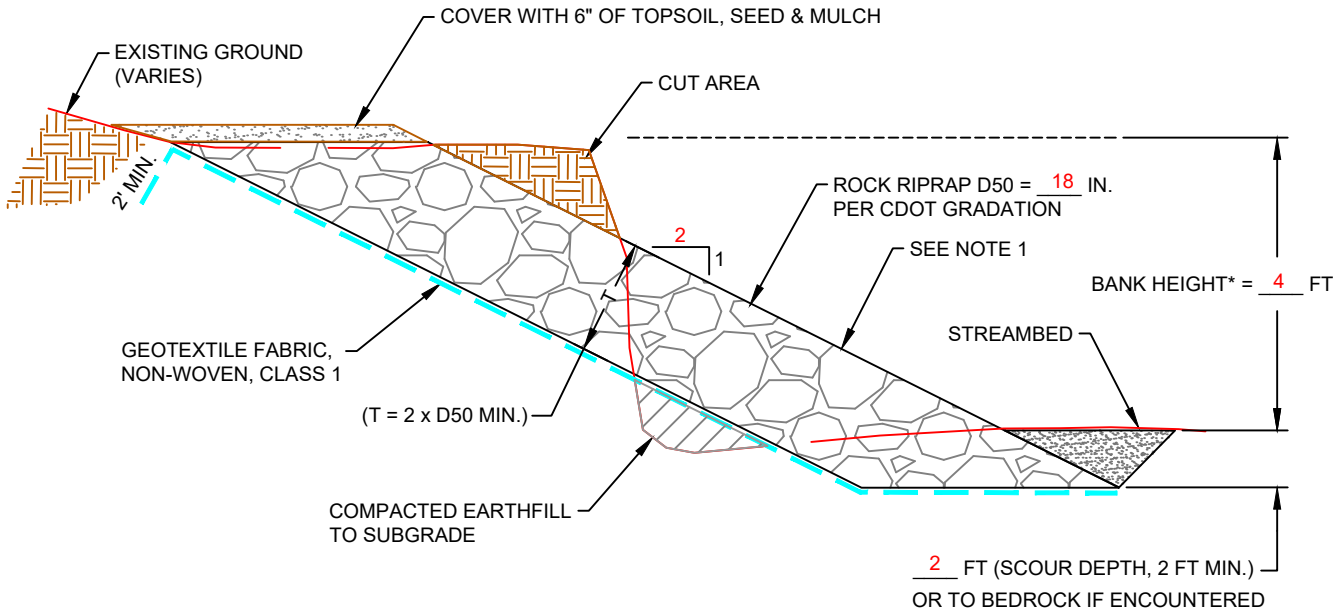

TYPICAL ROCK RIPRAP SECTION
(NOT TO SCALE)

* APPROXIMATE AVERAGE BANK HEIGHT

NOTE:
1. IF EXTRA EARTH MATERIAL IS AVAILABLE,
USE IT TO FILL VOIDS IN ROCK TO PROMOTE
VEGETATION GROWTH.



END CUTOFF KEYS/SILLS

CDOT TYPE	MEDIAN ROCK SIZE (D50) INCHES	% OF MATERIAL SMALLER THAN TYPICAL ROCK	TYP. ROCK SIZE (INCHES)	TYP. ROCK WEIGHT (POUNDS)
H	18	100	42	3,500
		50-70	24	650
		35-50	18	275
		2-20	6	10
VH	24	50-70	33	1,700
		35-50	24	650
		2-10	9	35

Designed by:	TJ BURR	Date	3/28/2020
Drawn by:	TJ BURR		5/29/2020
Checked by:	M. GUTEKUNST		/ /
Approved by:	J. ANDREWS		/ /

TOMICHI CREEK
TOMICHI CREEK LOWER REACH SITE
STREAM RESTORATION
ROCK RIPRAP DETAIL



United States
Department of
Agriculture

Natural Resources
Conservation Service

JOB CLASS:
V


SHEET REVISED:
5/29/2020

SHEET 17 OF 17

US DEPARTMENT OF AGRICULTURE
NATURAL RESOURCES CONSRVATION SERVICE
TOMICHI CREEK STREAM RESTORATION - UPPER REACH

Drainage Area = 1,061 SQ MI

PROJECT LOCATION

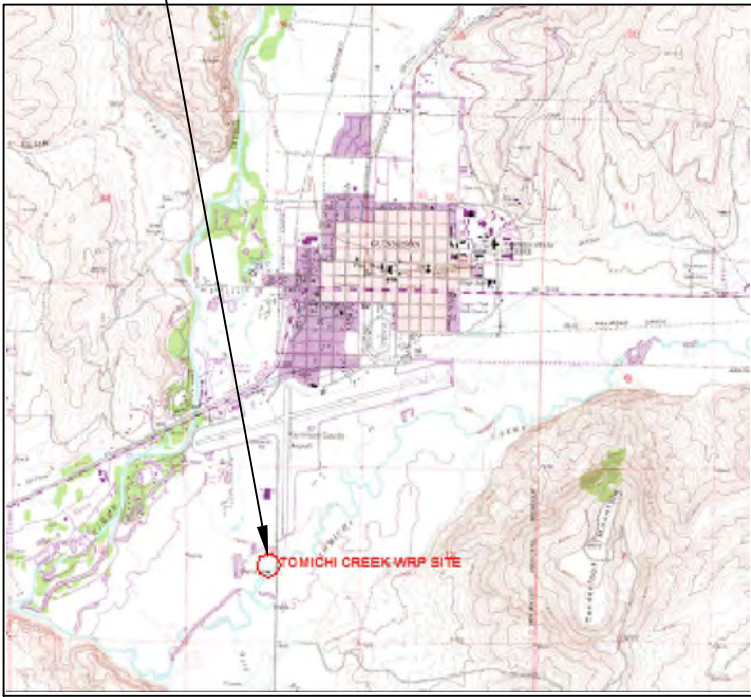

LATITUDE: N 38.517, LONGITUDE: W -106.945
PROJECT LOCATION MAP
NOT TO SCALE

TABLE OF CONTENTS	
SHEET NO.	SHEET TITLE
1	COVER SHEET
2	GENERAL NOTES, SYMBOLS & STRUCTURE TABLE
3	SITE PLAN 1 & GEOMORPHIC DESIGN DATA
4	SITE PLAN 2
5	TYPICAL CROSS SECTIONS
6	CROSS-SECTIONS 1
7	CROSS-SECTIONS 2
8	CROSS-SECTIONS 3
9	CROSS-SECTIONS 4
10	PROFILES
11	DETAILS 1 - J-HOOK
12	DETAILS 2 - ROCK TOE
13	DETAILS 3 - ROCK DEFLECTOR
14	DETAILS 4 - CROSS VANE

REVISIONS		
DESCRIPTION	DATE	BY
CLARIFICATIONS AFTER PRE-BID MTG	3/3/2021	TJB
MINOR ADJUSTMENTS TO ELEV & DIMENSIONS	4/23/2021	TJB
MAJOR ADJUSTMENTS FOR CHANNEL CHANGES	11/16/2021	TJB

SUBMITTAL			
DESCRIPTION		DATE	APPROVED
PRELIMINARY LAYOUT	○	3/14/2018	TJB
50% PRELIMINARY DESIGN	○	5/1/2019	TJB
75% PRELIMINARY DESIGN	○	7/29/2019	TJB
90% PRELIMINARY DESIGN	○	5/27/2020	TJB
FINAL DESIGN - APPROVED	●	4/5/2021	JEA

SURVEY CONTROL POINTS				
Pt #	Northing	Easting	Elev	Description
4	13,993,474.540	1,084,826.900	7587.912	TBM-4 RBR
5	13,994,128.330	1,085,422.855	7592.367	TBM-5 T STK
6	13,993,505.130	1,085,324.552	7590.978	TBM-6 T STK
7	13,991,894.240	1,082,704.744	7576.628	TBM-7 T STK
8	13,991,995.640	1,082,664.048	7577.946	TBM-8 T STK
9	13,991,490.290	1,082,379.466	7575.913	TBM-9 T STK
498	13,992,543.500	1,082,987.778	7580.064	TBM PIN
527	13,992,128.560	1,082,764.703	7578.434	HUB 15/14
532	13,991,995.560	1,082,664.130	7577.914	TBM 8
3004	13,993,474.540	1,084,826.900	7587.910	TBM4 RBR
6001	13,991,770.470	1,082,617.552	7576.872	INSTRUMENT
6002	13,991,490.320	1,082,379.277	7575.896	TBM 9B

ESTIMATED QUANTITIES FOR MAJOR WORK ITEMS				
DESCRIPTION	SPEC	QTY	UNIT	
Pollution Control & Dewatering	805	1.0	LS	
Seeding & Mulching	805	1.0	AC	
Earthwork & Channel Shaping	822	869	CY	
Rock Riprap, 15"	861	35	TN	
Structure Rock	861	952	TN	
Geotextile Fabric	895	160	SY	
Salvage & Transplant Sod	822	1,767	SF	
Transplant Willow Clumps	869	28	EA	
Mobilization & Demobilization	808	1.0	LS	

COOPERATOR AGREEMENT

THIS PLAN HAS BEEN DISCUSSED WITH ME BY THE NRCS AND I AM IN AGREEMENT WITH THE CALCULATIONS AND DESIGN.

I SHALL CONSTRUCT THIS PROJECT ACCORDING TO NRCS PLANS AND SPECIFICATIONS. LAND AND WATER RIGHTS, PERMITS, EASEMENTS AND RIGHTS-OF-WAY HAVE BEEN OBTAINED FOR ALL PROPERTIES INVOLVED. ANY CHANGES TO THE PROJECT DESIGN SHALL BE APPROVED BY AN NRCS REPRESENTATIVE AND THE LANDOWNER.

I REALIZE TO RECEIVE COST SHARE PAYMENTS, NRCS PERSONNEL MUST INSPECT THE INSTALLATION TO ENSURE COMPLIANCE WITH SPECIFICATIONS. I SHALL CONTACT NRCS TO ARRANGE THE INSPECTION OF EACH PROJECT ELEMENT DURING CONSTRUCTION.

COOPERATOR: _____ DATE: _____

UTILITY NOTIFICATION

NO REPRESENTATION IS MADE BY THE NATURAL RESOURCES CONSERVATION SERVICE AS TO THE EXISTENCE OR NONEXISTENCE OF UNDERGROUND UTILITIES. CALL 2 BUSINESS DAYS IN ADVANCE BEFORE YOU DIG, GRADE, OR EXCAVATE FOR THE MARKING OF UNDERGROUND MEMBER UTILITIES. CALL UTILITY NOTIFICATION CENTER OF COLORADO AT (UNCC) AT 1-800-922-1987 OR 811. IN THE METRO DENVER AREA CALL 303-232-0491 OR 811.

THE COOPERATOR SHALL PROVIDE NRCS WITH THE UNCC TICKET NUMBER ACQUIRED PRIOR TO START OF CONSTRUCTION.

UNCC TICKET NUMBER: _____

CONSTRUCTION DATA & AS-BUILT DRAWINGS

LAYOUT BY: _____ DATE: _____

CONTRACTOR NAME AND ADDRESS: _____

CONSTRUCTION COMPLETED _____ DATE: _____

PRACTICE (DOES) (DOES NOT) MEET STANDARDS AND SPECIFICATIONS. _____ DATE: _____

TITLE: _____

AS-BUILT DRAWINGS REVIEWED AND APPROVED BY: _____ DATE: _____

TITLE: _____

United States
Department of
Agriculture
USDA
Natural Resources
Conservation Service

Job Class
V

FILE NO.
Drawings_Tomichi_Upper Reach.dwg

REVISED:
11/16/2021

SHEET 1 OF 14

TOMICHI CREEK WATERSHED
TOMICHI CREEK STREAM RESTORATION - UPPER REACH
GUNNISON COUNTY, CO
COVER SHEET

Designed by: TJBURR
Drawn by: TJBURR
Checked by: J. ANDREWS
Approved by: J. ANDREWS

Date: 3/3/2021
3/3/2021
4/5/2021
4/5/2021

GENERAL NOTES:

1. All work shall comply with the constriction specifications, drawings, and other contract requirements.
2. All notes on the drawings and information in specifications are directed to the Contractor, unless stated otherwise.
3. Contact the Owner or NRCS representative for any conflicts or discrepancies among the drawings, details, and specifications.
4. Verify site conditions at the work site before mobilization.
5. Accomplish in-stream work during low flow conditions.
6. Finish grade to slopes as specified on the drawings. Blend grades to match existing grades. Work includes minor grading, and sloping “flat” areas to at least 2% to provide positive drainage.
7. Provide erosion control measures and best management practices to prevent runoff from disturbed areas and exposed soils from entering surface waters or wetland areas. Muddy runoff or discharges from disturbed areas shall be filtered to prevent an increase in turbidity of surface water (seeps, springs, streams, rivers, lakes, and wetlands).
8. Take precautions to avoid spilling fuel or oil. If a fuel or oil spill occurs, properly clean the affected area and dispose of any contaminated soils to prevent surface or ground water contamination. A spill response kit is required while equipment is operating. See specifications for more details.
9. Remove, store, and replace topsoil to restore disturbed areas that do not have other specified surfacing. Seed and mulch all disturbed soil surfaces with native grass seed according to the specifications.
10. Restore access and staging areas used during construction to pre-existing conditions or better. Plan the movement of equipment and materials to minimize disturbance, and to limit the number of trips to and from each work site.
11. All excavation work is unclassified (See Construction Specification 822 for the definition of “unclassified excavation”). All earthwork required by and shown on the drawings is included in the work.
12. Stake bankfull elevations at the work site before installing structures or other work. NRCS will provide bankfull elevations by station, or will help identify bankfull in the field.
13. Provide all structures according to typical details and proposed cross-sections, unless noted otherwise.
14. NRCS representative will stake the approximate locations of major work items and structures.

DEFINITIONS are in the general requirements in the construction specifications.

ABBREVIATIONS:












XS: CROSS SECTION

ECF: EROSION CONTROL FABRIC

EROSION & SEDIMENT CONTROL NOTES:

1. Provide erosion and sediment (E&S) control measures to minimize sediment runoff and soil loss from project site.
2. Use the following additional E&S control measures as required: limit area of disturbance; preserve existing vegetation where removal is not required by work; surface roughening; surface water control; biodegradable erosion control fabric; seeding and mulching; diversion of runoff around disturbed areas. See the specifications for additional information.
3. Provide E&S control measures before disturbing the site. Erosion control wattles or silt fence are not needed at this site due to vegetation, flat slopes, & granular soils.
4. After final site stabilization (re-vegetation), remove temporary E&S control measures. Immediately stabilize areas disturbed during removal of temporary measures.
5. Construction access and work limits are restricted to locations shown on the drawing or as approved by the Owner.
6. Keep stockpile heights below 35 feet with slopes of 2H:1V or flatter. For stockpiles left for 5 or more days, place silt fence or wattles around the low side of the stockpile to filter the runoff. Seed and mulch stockpiles that will remain for 21 days or longer.
7. Seed and mulch finish graded areas within 5 days.
8. Maintain all erosion control devices throughout construction and until the site is stabilized. Inspect erosion control measures weekly and after each rainfall or snowmelt. Accomplish all remedial maintenance work immediately, including clean out, repair, replacement, re-grading, re-seeding, re-mulching, etc.
9. When pumps are used for dewatering operations, filter the discharge through a properly sized stilling basin.
10. To help prevent the introduction of invasive, non-native plants to work areas, clean all equipment brought to the work site from outside of the project location watershed. Anytime equipment is moved to a stream in a different watershed, it should be cleaned to remove soil, seeds, sticks, and other potential contaminants.

SYMBOL LEGEND



RIFFLE

EXISTING POOL

NEW OR ENHANCED POOL

POINT BAR GRADING

EXCAVATE THALWEG CHANNEL
1 FT DEEP x 4 FT WIDE

SECTION LOCATION

EXISTING BOULDER











NEW BOULDERS OR ROCK TOE

J-HOOK VANE (SEE TYP. DETAIL)

ROCK CROSS VANE (SEE TYP. DETAIL)

DEBRIS REMOVAL

EXISTING DEPOSITION WITH DENSE VEGETATION



CONSTRUCTION LIMITS

EARTHFILL

ROCK TOE PROTECTION

PLANT TREES, SHRUBS, WILLOWS

STRIP SOD DOWN TO 18-INCHES &
SALVAGE FOR RE-USE ON-SITE

X-7500.2 SPOT ELEVATION

EXCAVATION

TRANSPLANTED SHRUB

EXISTING TREE OR SHRUB

ROCK DEFLECTOR (SEE TYP. DETAIL)

STRUCTURE TABLE							
STRUCTURE	STA	ARM L (FT)	HOOK DIA	ARM SLOPE	ELEV PT. 1	ELEV PT. 2	ELEV PT. 3
CROSS VANE 1	7+23	27	13.3'	5.0%	7587.8	7586.5	7586.0
CROSS VANE 2	0+42	21	10.7'	6.0%	7587.8	7586.5	7586.0
J-HOOK	11+37	38	13.3'	5.6%	7585.9	7584.2	7583.6

STRUCTURE STATION (STA) IS AT APEX OF HOOK OR POINT 3

Date	3/3/2021
Designed by:	TJ BURR
Drawn by:	TJ BURR
Checked by:	J. ANDREWS
Approved by:	J. ANDREWS

TOMICHI CREEK WATERSHED
TOMICHI CREEK STREAM RESTORATION - UPPER REACH
GUNNISON COUNTY, CO
NOTES & SYMBOLS



United States
Department of
Agriculture

Natural Resources
Conservation Service

Job Class

V

FILE NO.

Drawings_Tomichi_Upper Reach.dwg


REVISED:

11/16/2021

SHEET 2 OF 14

KEY GEOMORPHOLOGICAL CHARACTERISTICS			
Characteristic	Existing	Design	Reference
Valley Type		VIII(b)	
Valley Width, feet		7,900	
Stream Type		C3/C4	
Drainage Area, Square Miles		1,061	
Bankfull Discharge, cfs (Qbkf)		570	
Mean Velocity, ft/sec		2.95	
Bankfull Slope, ft/ft (S)		0.0027	
Bankfull Width, ft (Wbkf)		60.9	
Mean Depth, ft (dbkf)		2.76	
Width/Depth Ratio (W/D)		19	
Cross-Sectional Area, ft2 (Abkf)		192.4	
Maximum Depth (dmax)		5.00	
Width of Flood-Prone Area, ft (Wfpa)		500	
Entrenchment Ratio (Wfpa/Wbkf)		8.21	
Sinuosity (k) (SL/VL)		1.42	
Stream Length Assessed for Erosion (ft)		130	
Streambank Erosion (tons/yr)		5	
Pool-to-Pool Spacing		365	
Bankfull Shear Stress, psf		0.50	


Information Sheet - No Construction
This is upstream of project area.
Provided as a reference.

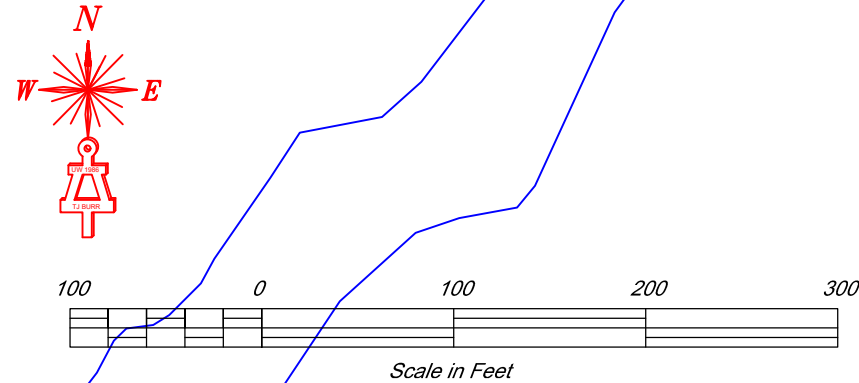

FLOW DATA CORRESPONDING TO SURVEYS:
12/5/2014: 95-100 CFS Pts# 1-425
5/27/2015: 565 CFS Bankfull Flow, Pts # 426-622
9/15/2015: 120 CFS Pts# 803-1134
8/20/2015: 170 CFS Pts# 623-802
11/16/2015: 95 CFS Pts# 2001-2606 (Gage Froze on 11/13/2015)
10/13/2015: 73 CFS Aerial Image Date
11/1/2018: 66 CFS Photos Taken

Since flows fluctuate continually, it is important to note the date of water surface elevation points.

BANKFULL ELEVATIONS BY STATION			
Station	Station	Bkf Elev.	Top of Rock Toe Elevation
Enter starting station:	7+00.00	7587.98	
	7+20.00	7587.89	
	7+40.00	7587.80	
	7+60.00	7587.71	
	7+80.00	7587.63	
	8+00.00	7587.54	
	8+20.00	7587.45	
	8+40.00	7587.36	
	8+60.00	7587.27	
	8+80.00	7587.19	
	9+00.00	7587.10	
	9+20.00	7587.01	
	9+40.00	7586.92	
	9+60.00	7586.83	
	9+80.00	7586.75	
	10+00.00	7586.66	
	10+20.00	7586.57	
	10+40.00	7586.48	
	10+60.00	7586.39	
	10+80.00	7586.31	
	11+00.00	7586.22	
	11+20.00	7586.13	
	11+40.00	7586.04	
	11+60.00	7585.95	
	11+80.00	7585.87	
	12+00.00	7585.78	
	12+20.00	7585.69	
	12+40.00	7585.60	
	12+60.00	7585.51	
	12+80.00	7585.43	
	13+00.00	7585.34	

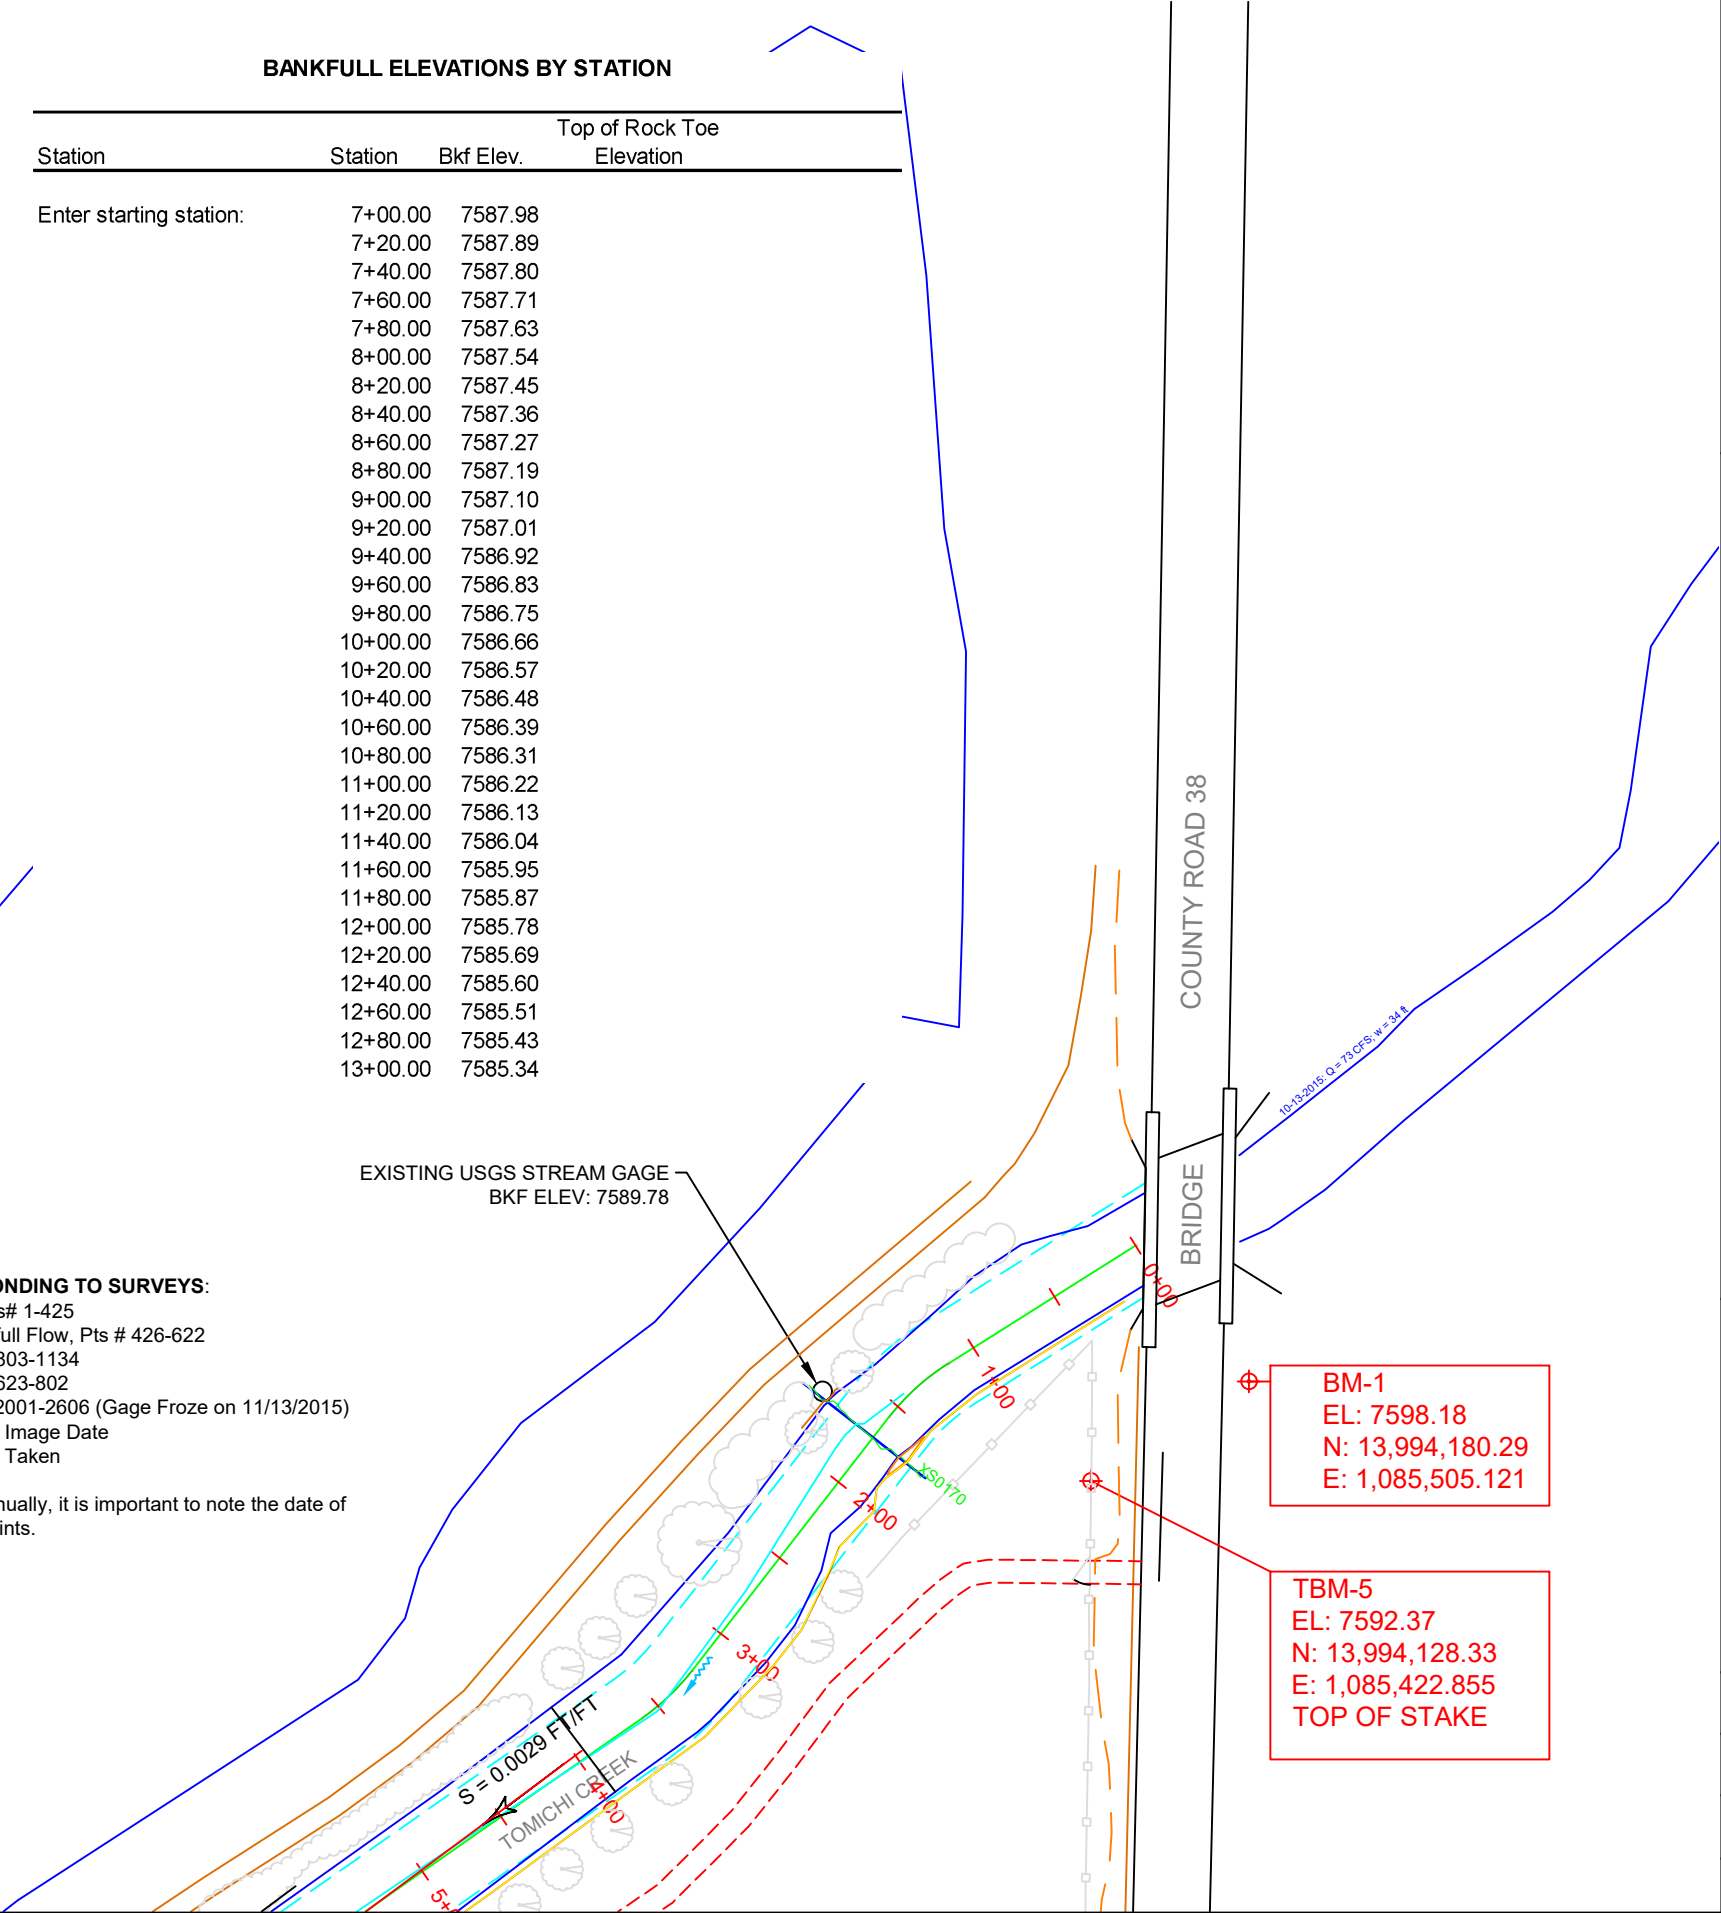

Date

3/3/2021

Designed by:

TJ BURR

Drawn by:

TJ BURR

Checked by:

J. ANDREWS

Approved by:

J. ANDREWS

TOMICHI CREEK WATERSHED

TOMICHI CREEK STREAM RESTORATION - UPPER REACH

GUNNISON COUNTY, CO

SITE PLAN 1

United States

Department of

Agriculture

USDA

Natural Resources

Conservation Service

Job Class

V

FILE NO.


Drawings_Tomichi_Upper Reach.dwg

REVISED:


6/24/2021

SHEET 3 OF 14


DRAWINGS (REV: 11/16/2021)

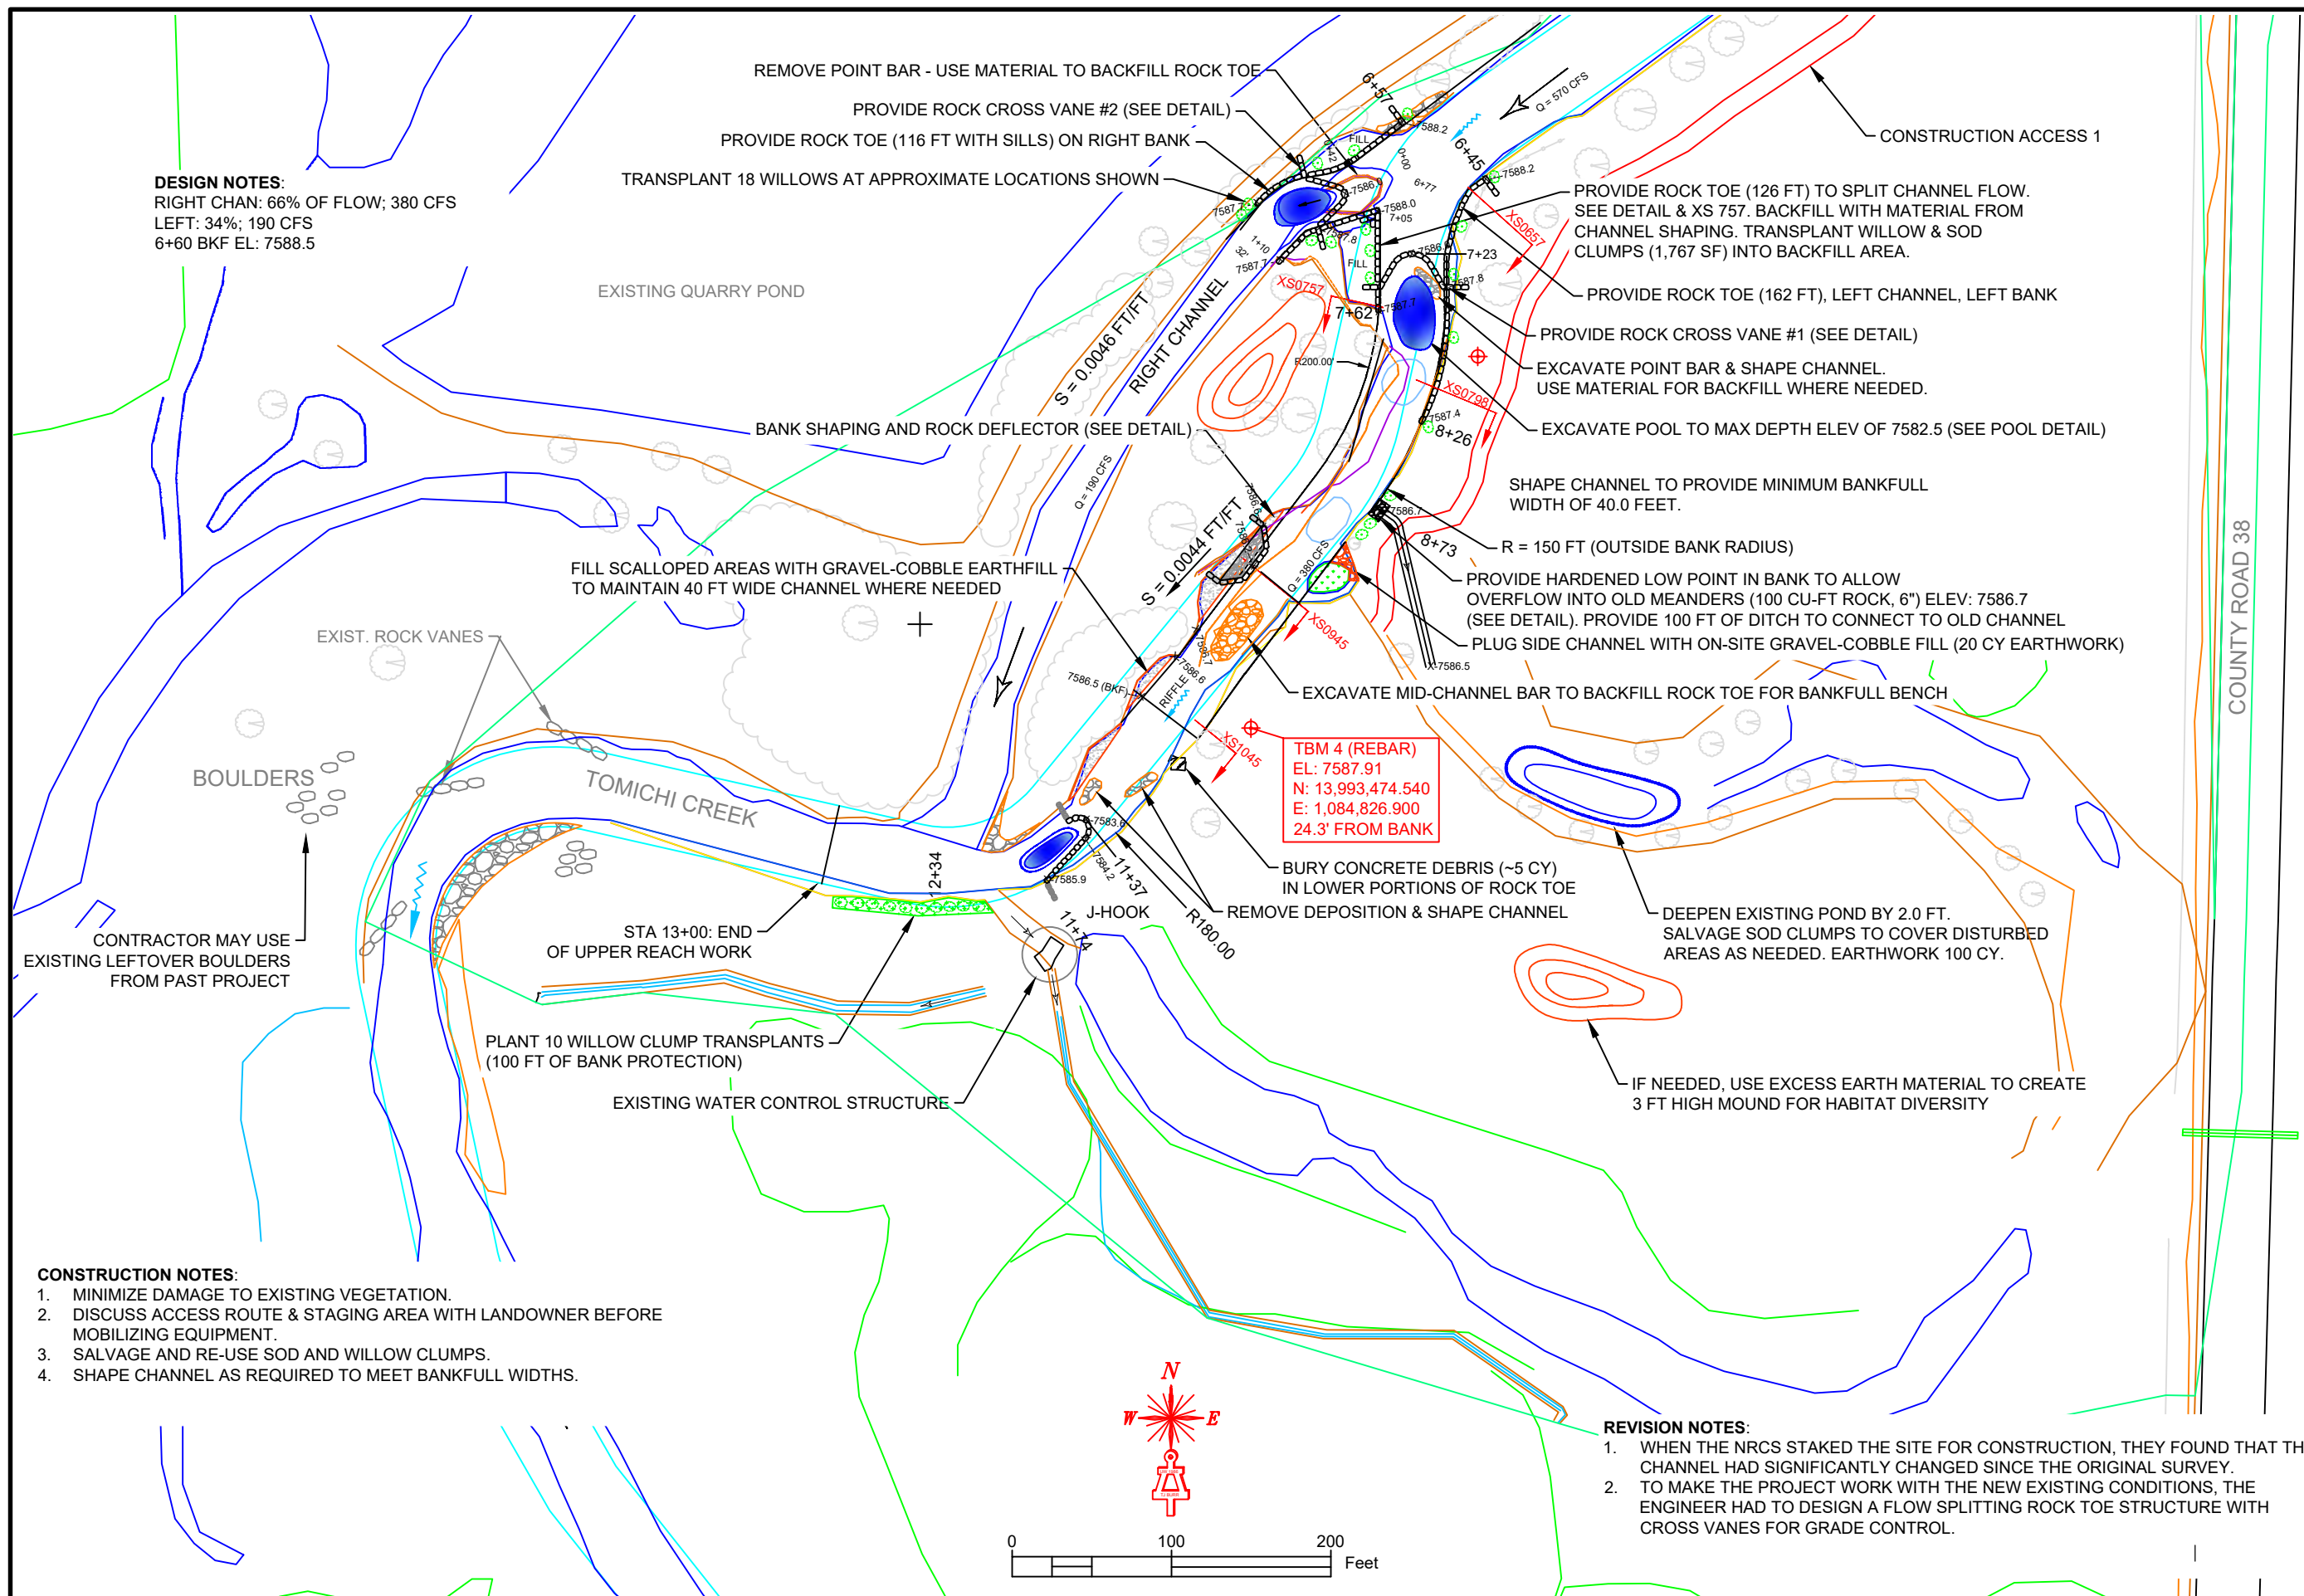

 <p>United States Department of Agriculture</p> <p>Natural Resources Conservation Service</p>	<p>TOMICHI CREEK WATERSHED</p> <p>TOMICHI CREEK STREAM RESTORATION - UPPER REACH</p> <p>GUNNISON COUNTY, CO</p> <p>SITE PLAN 2</p>			<p>Designed by: <u>TJ BURR</u></p> <p>Drawn by: <u>TJ BURR</u></p> <p>Checked by: <u>J. ANDREWS</u></p> <p>Approved by: <u>J. ANDREWS</u></p>	<p>Date</p> <p><u>3/3/2021</u></p> <p><u>3/3/2021</u></p> <p><u>4/5/2021</u></p> <p><u>4/5/2021</u></p>
	Job Class	V			
	FILE NO.	Drawings_Tomichi_Upper Reach.dwg			
	REVISED:	11/16/2021			
	SHEET 4 OF 14				

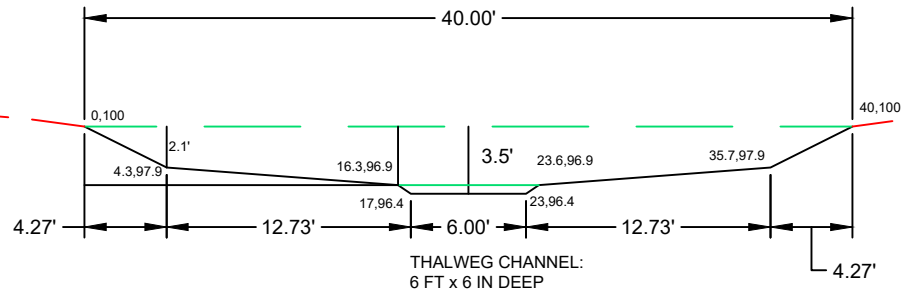


TYPICAL "RIFFLE" CROSS-SECTION (DESIGN)




TYPICAL "RIFFLE" CROSS-SECTION (CONSTRUCT)


MAIN CHANNEL (LEFT) - SHAPING GUIDE

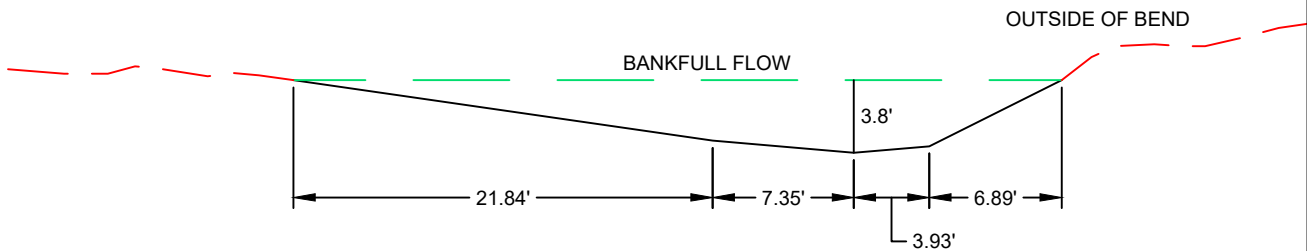

TYPICAL "POOL" CROSS-SECTION (DESIGN) AT BEND

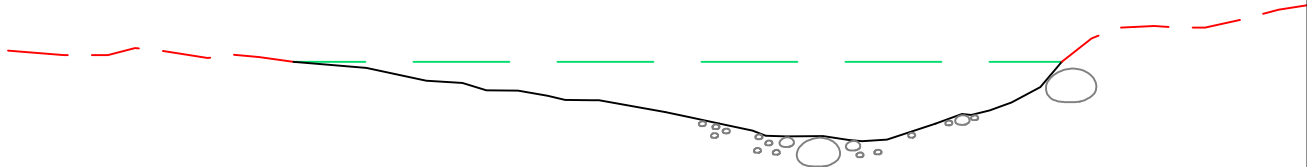

TYPICAL "POOL" CROSS-SECTION (CONSTRUCT)

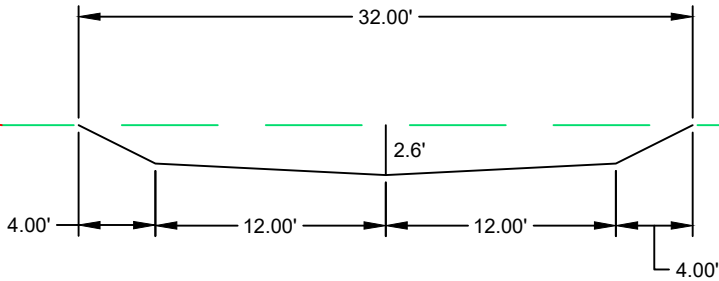

TYPICAL "RIFFLE" CROSS-SECTION (RIGHT CHANNEL)

RIGHT CHANNEL DESIGN INFO:

DA = 1,061 sq. mi
Q_{bkt} = 190 cfs
W_{bkt} = 32 ft
A_{bkt} = 63.2 sf
D_{max} = 2.6 ft
W_p = 33.0 ft
d = 1.98 ft
v = 3.5 ft/s
W/D = 16.2
n = 0.045
S = 0.0046 ft/ft
Shear Stress = 0.55 psf

LEFT CHANNEL DESIGN INFO:

DA = 1,061 sq. mi
Q_{bkt} = 380 cfs
W_{bkt} = 40 ft
A_{bkt} = 97.6 sf
D_{max} = 3.5 ft
W_p = 41.4 ft
d = 2.44 ft
v = 3.9 ft/s
W/D = 16.4
n = 0.045
S = 0.0044 ft/ft

NOTES:

1. USE THIS AS A GENERAL GUIDE FOR CHANNEL SHAPING. IF SHOWN DIFFERENTLY AT A SPECIFIC CROSS-SECTION, FOLLOW THE CROSS-SECTION REQUIREMENTS.
2. THE "DESIGN" CROSS-SECTIONS SHOW THE DIMENSIONS, THE "CONSTRUCT" SECTIONS SHOW HOW IT SHOULD LOOK AFTER FINISH GRADING - ROUGHENED AND MORE NATURAL.




Designed by:	TJ BURR	Date	3/3/2021
Drawn by:	TJ BURR		3/3/2021
Checked by:	J. ANDREWS		4/5/2021
Approved by:	J. ANDREWS		4/5/2021

TOMICHI CREEK WATERSHED
TOMICHI CREEK STREAM RESTORATION - UPPER REACH
GUNNISON COUNTY, CO
TYP. CROSS SECTIONS




Job Class	V
FILE NO.	Drawings_Tomichi_Upper Reach.dwg
REVISED:	3/2/2021
SHEET 5 OF 14	

DRAWINGS (REV: 11/16/2021)

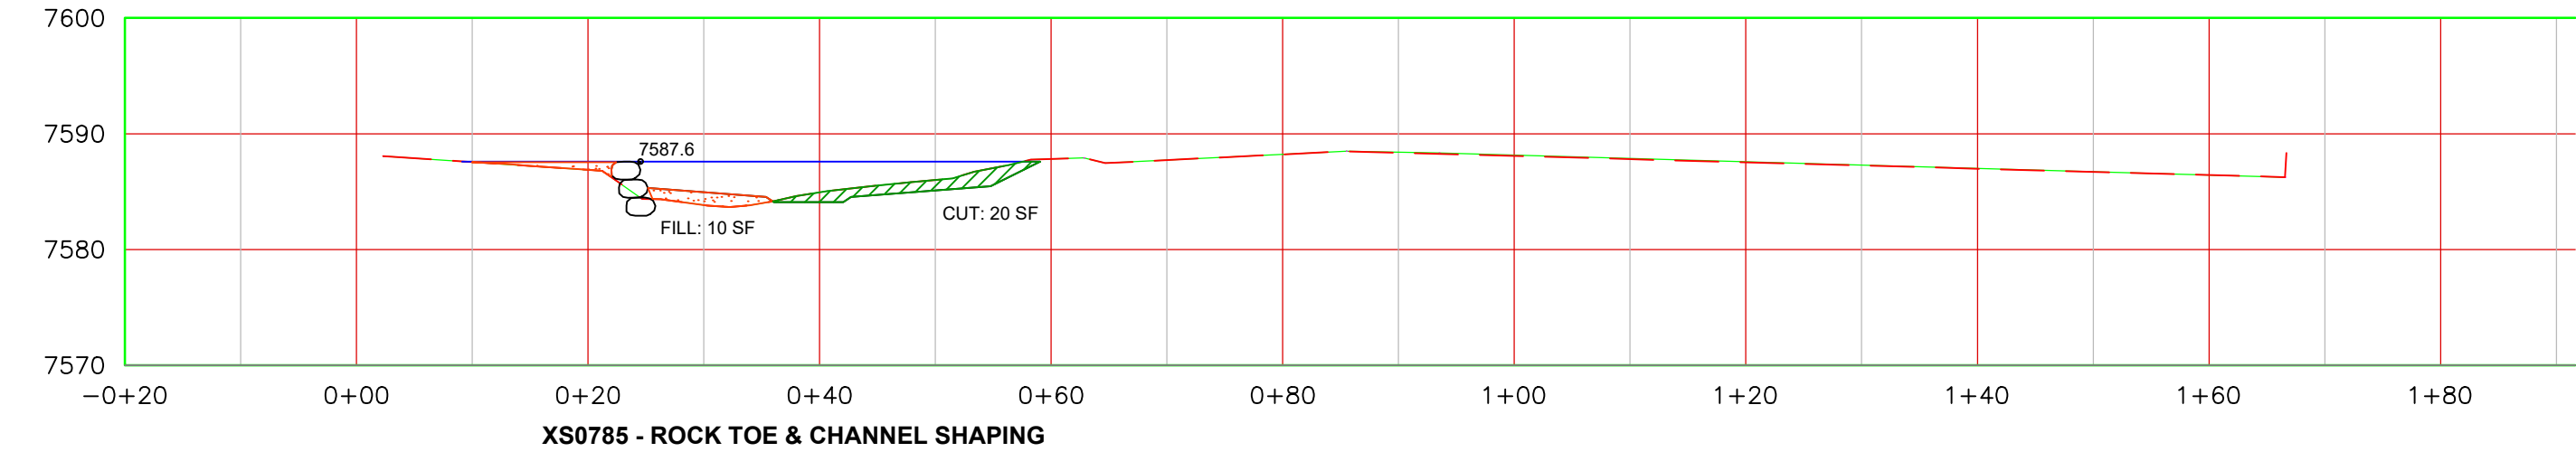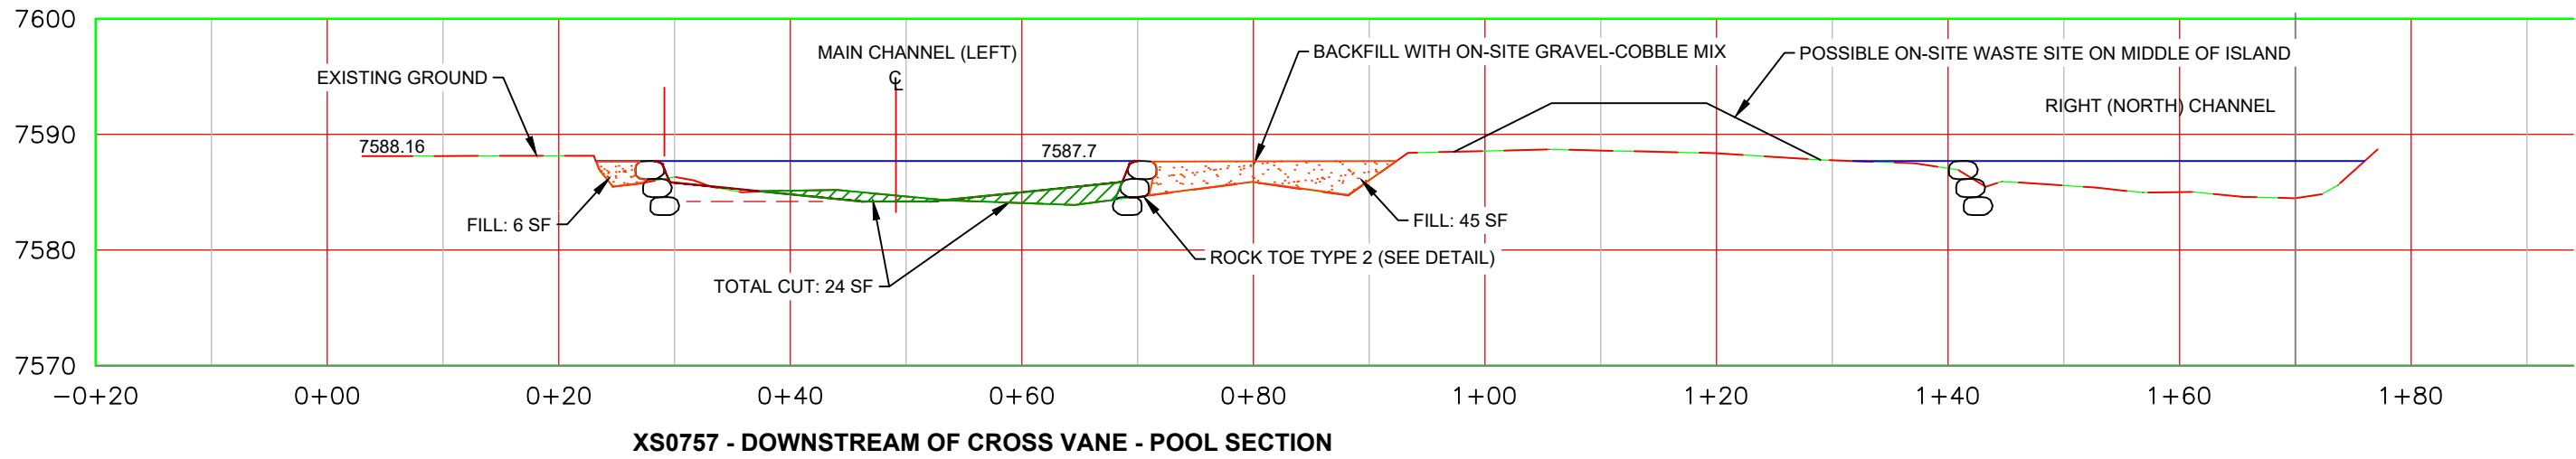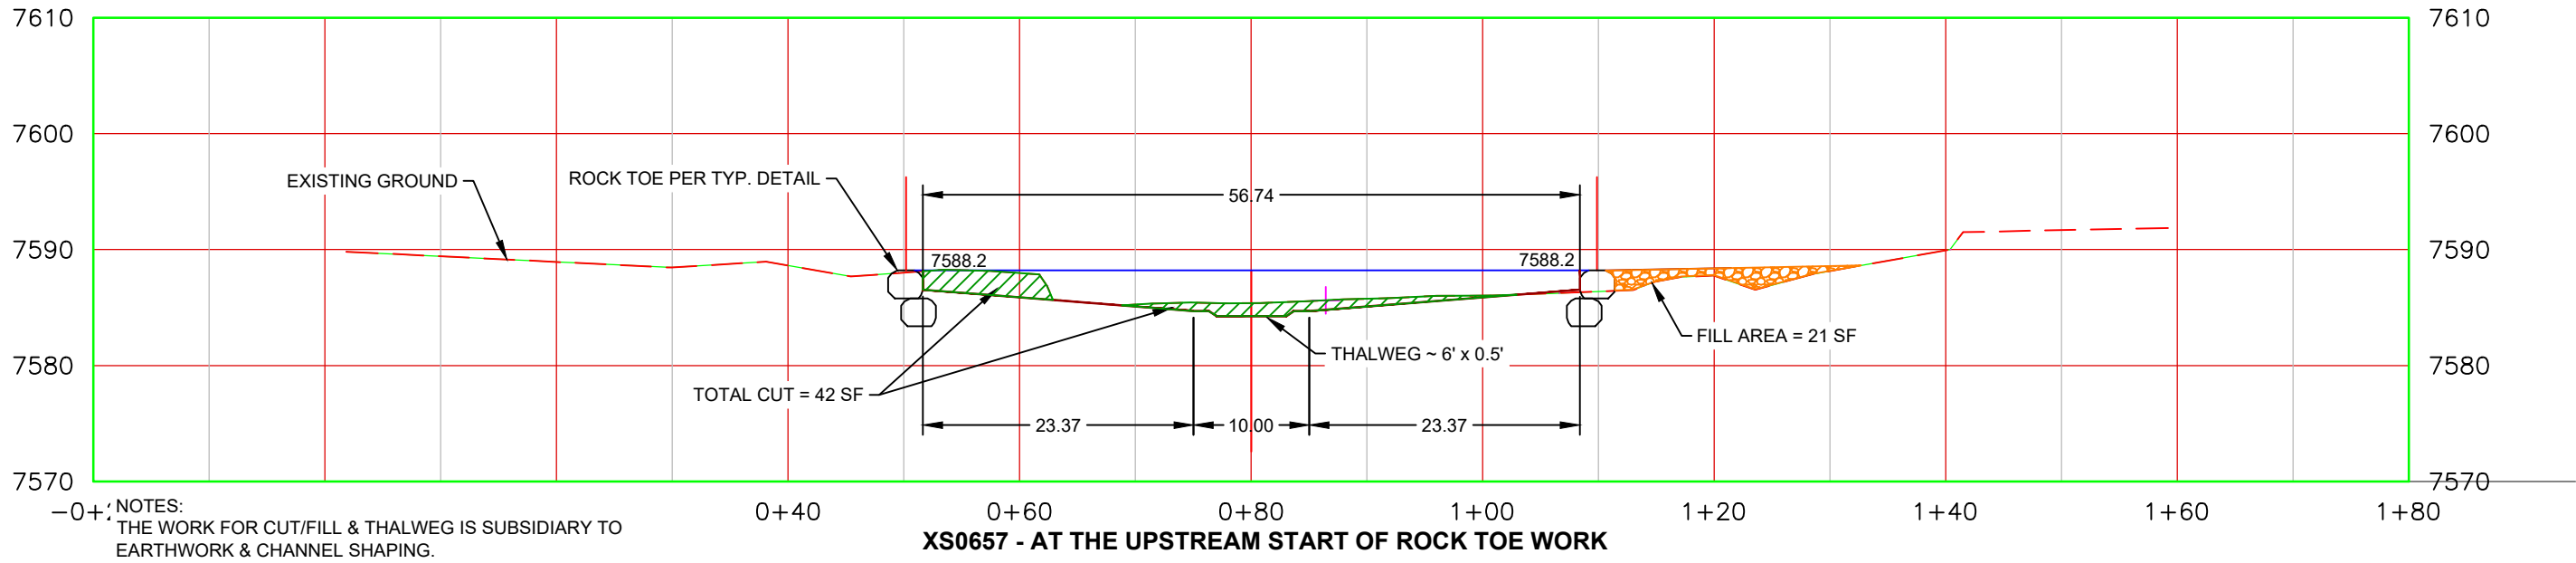

Date	3/3/2021
Designed by:	TJ BURR
Drawn by:	TJ BURR
Checked by:	J. ANDREWS
Approved by:	J. ANDREWS

TOMICHI CREEK WATERSHED
TOMICHI CREEK STREAM RESTORATION - UPPER REACH
GUNNISON COUNTY, CO
CROSS SECTIONS 1



United States
Department of
Agriculture

Natural Resources
Conservation Service

Job Class
V


FILE NO.
Drawings_Tomichi_Upper Reach.dwg

REVISED:
11/16/2021


SHEET 6 OF 14

DRAWINGS (REV: 11/16/2021)


BORDER OF PRINTABLE AREA ON SHEET

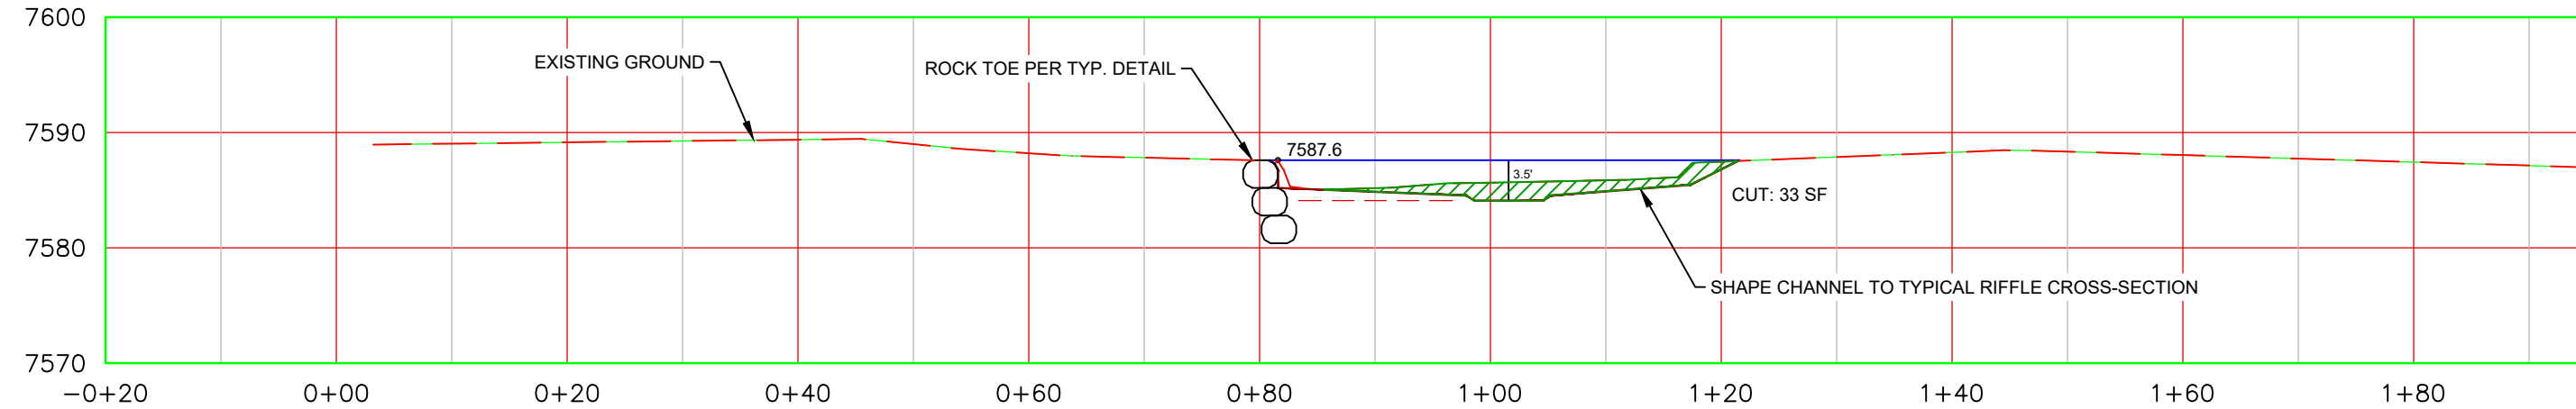

XS0798 - ROCK TOE & CHANNEL SHAPING

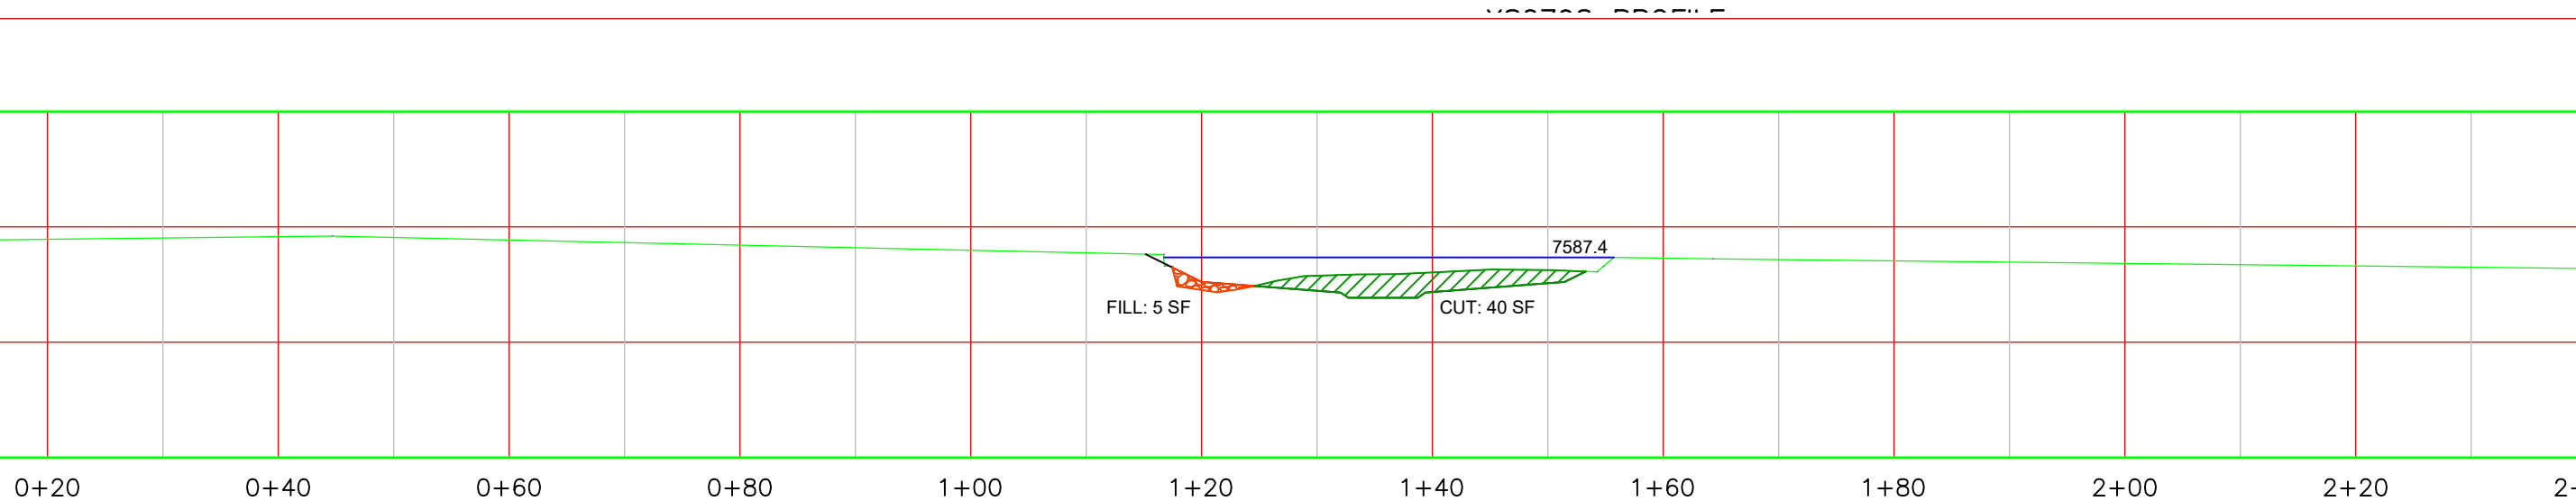

XS0826 - CHANNEL SHAPING

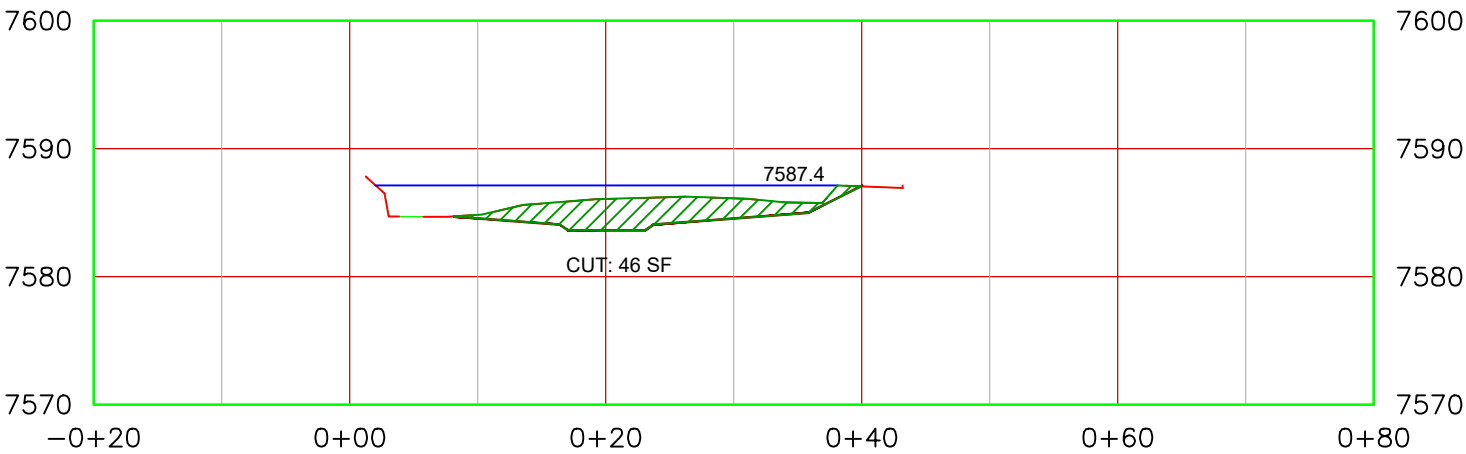

XS0840 - CHANNEL SHAPING

Designed by:	TJ BURR	Date	3/3/2021
Drawn by:	TJ BURR		3/3/2021
Checked by:	J. ANDREWS		4/5/2021
Approved by:	J. ANDREWS		4/5/2021

TOMICHI CREEK WATERSHED
TOMICHI CREEK STREAM RESTORATION - UPPER REACH
GUNNISON COUNTY, CO
CROSS SECTIONS 2



United States
Department of
Agriculture

Natural Resources
Conservation Service

Job Class

V

FILE NO.


Drawings_Tomichi_Upper_Reach.dwg

REVISED:


11/16/2021

SHEET 7 OF 14


DRAWINGS (REV: 11/16/2021)

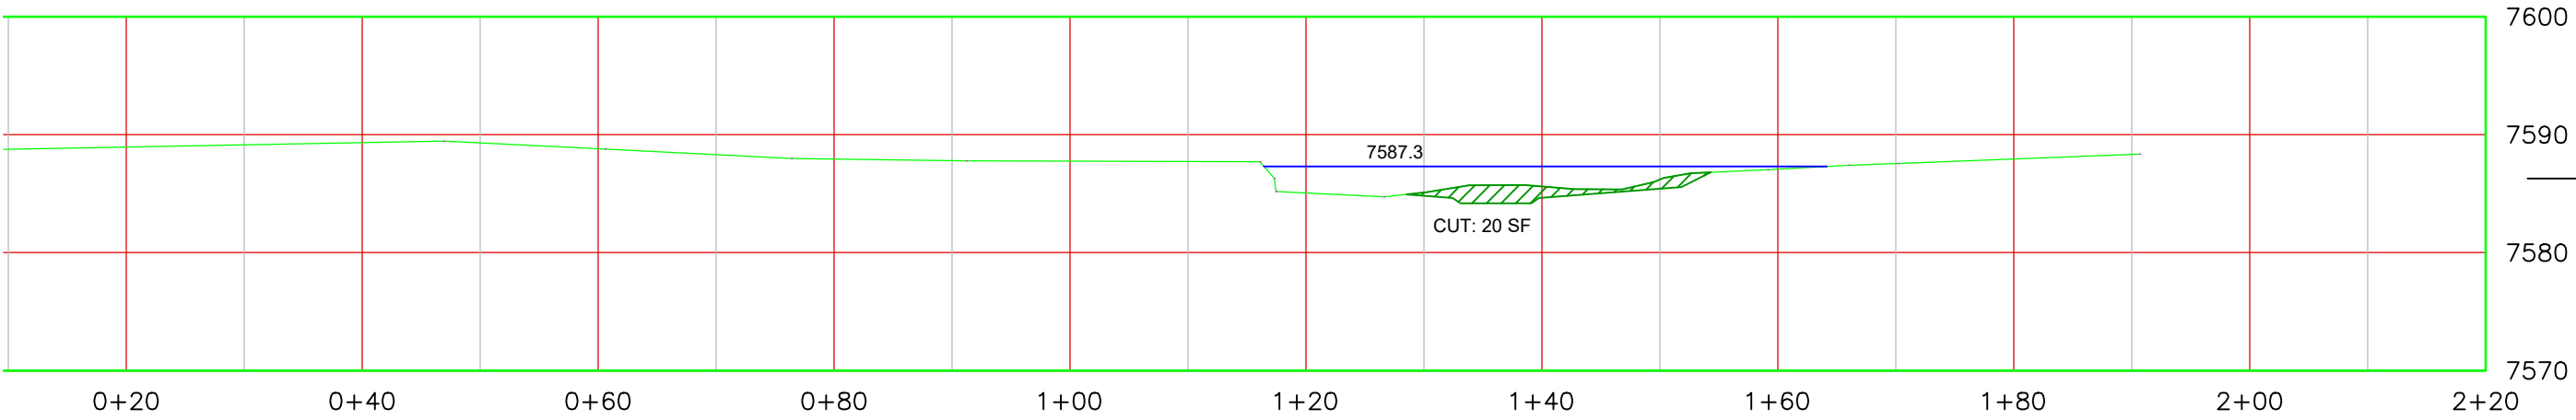

XS0862 - CHANNEL SHAPING

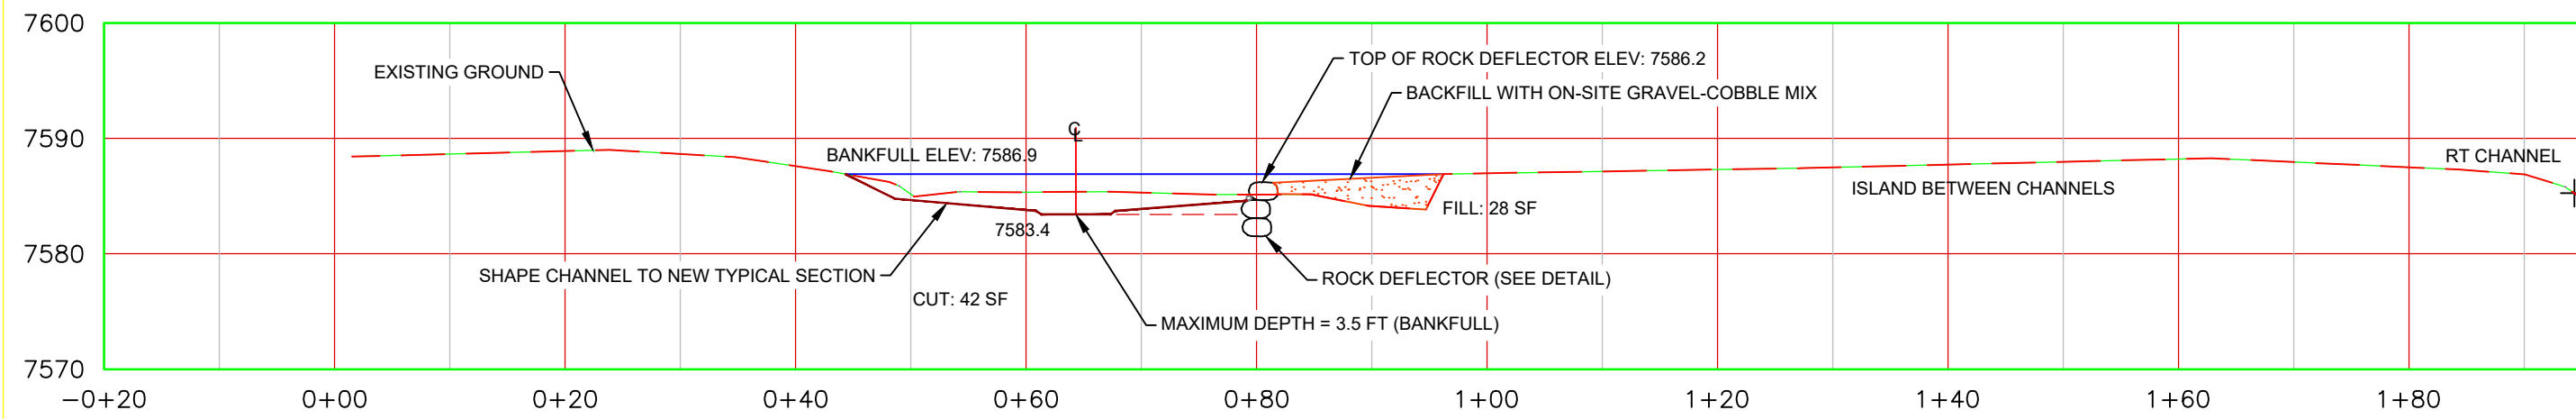


XS0945 - AT ROCK DEFLECTOR IN RIFFLE SECTION

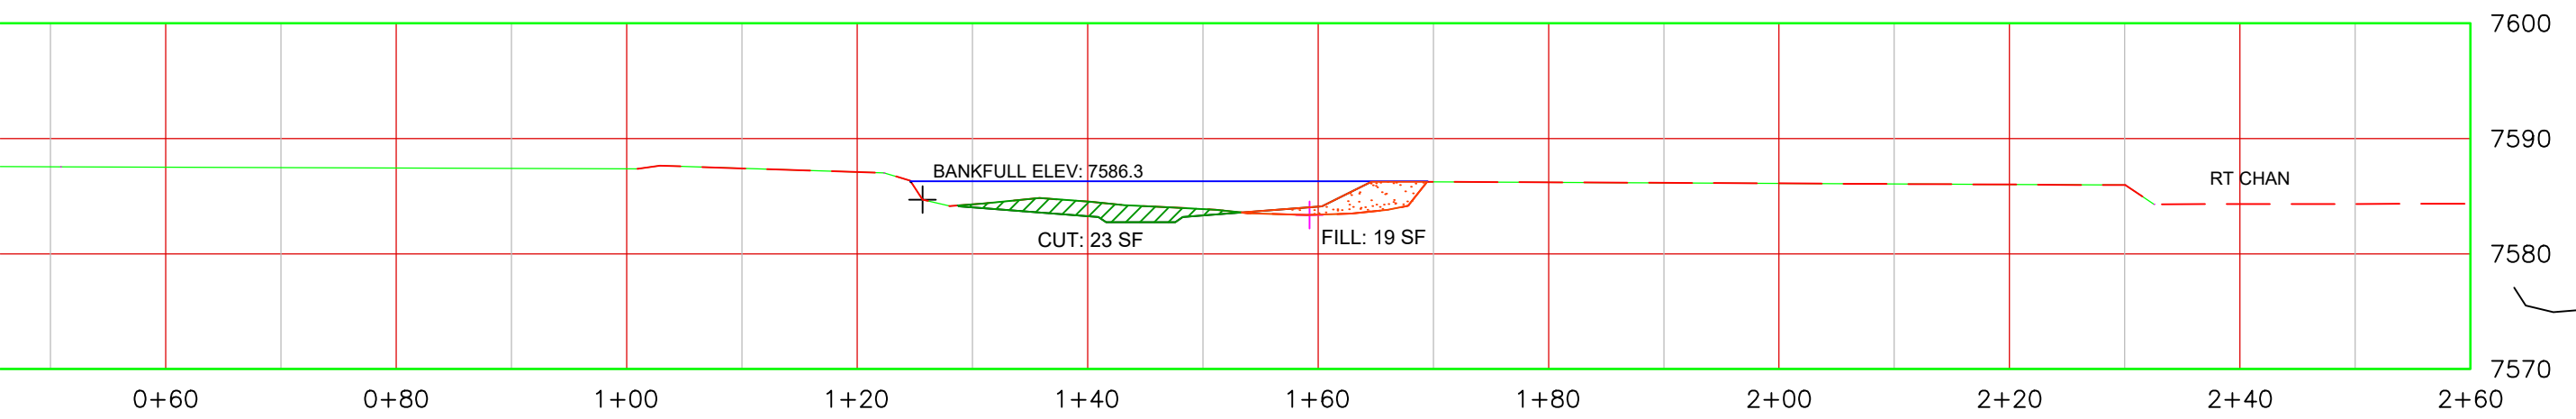

XS1088 - CHANNEL SHAPING

Date	3/3/2021
Designed by:	TJ BURR
Drawn by:	TJ BURR
Checked by:	J. ANDREWS
Approved by:	J. ANDREWS

TOMICHI CREEK WATERSHED
TOMICHI CREEK STREAM RESTORATION - UPPER REACH
GUNNISON COUNTY, CO
CROSS SECTIONS 3



United States
Department of
Agriculture



Natural Resources
Conservation Service

Job Class
V

FILE NO.
Drawings_Tomichi_Upper Reach.dwg

REVISED:
11/16/2021




SHEET 8 OF 14

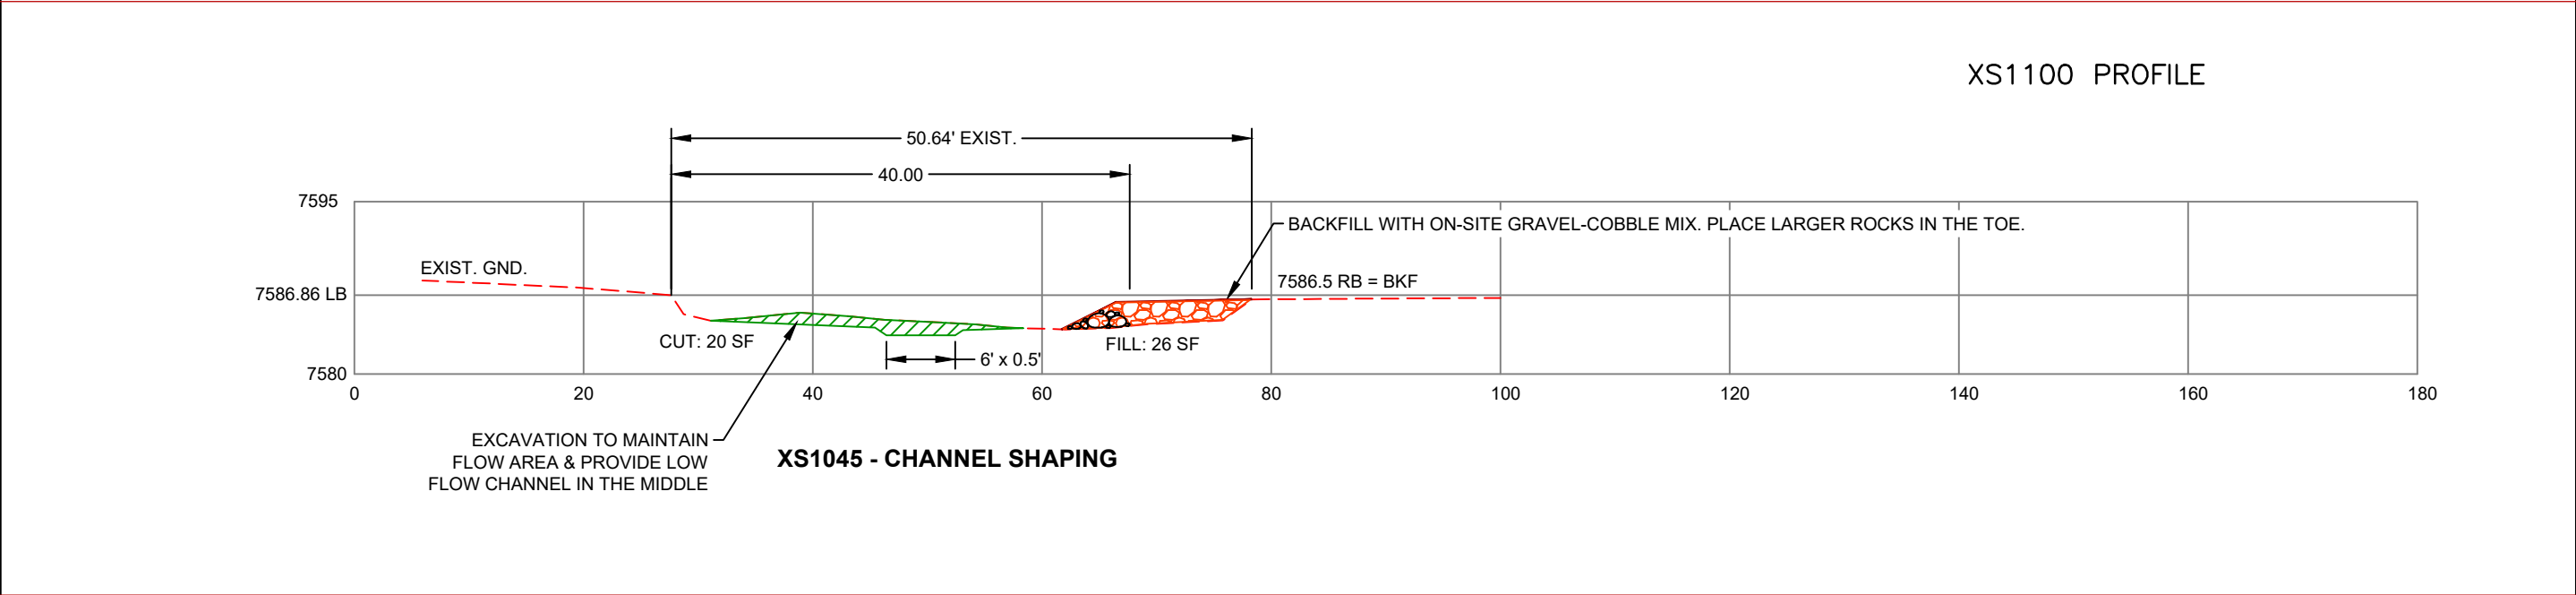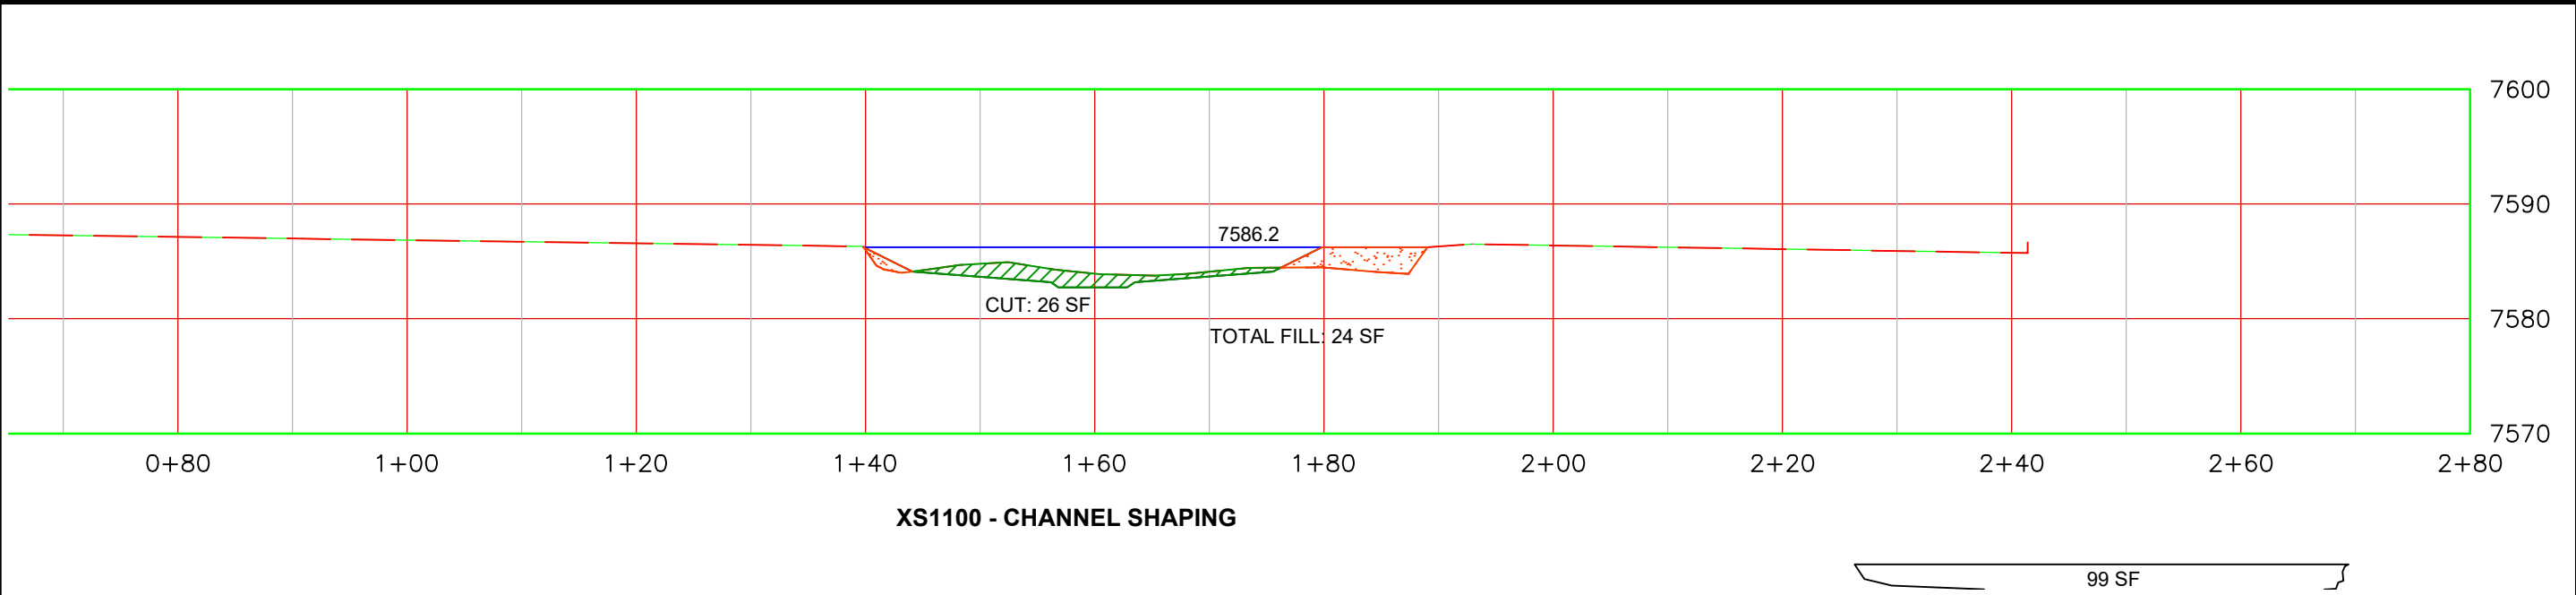

 United States Department of Agriculture Natural Resources Conservation Service	Job Class V
	FILE NO. <i>Drawings_Tomichi_Upper Reach.dwg</i>
	REVISED: 11/16/2021
	SHEET 9 OF 14


TOMICHI CREEK WATERSHED TOMICHI CREEK STREAM RESTORATION - UPPER REACH GUNNISON COUNTY, CO CROSS SECTIONS 4	Designed by: TJ BURR	Date: 3/3/2021
	Drawn by: TJ BURR	3/3/2021
	Checked by: J. ANDREWS	4/5/2021
	Approved by: J. ANDREWS	4/5/2021

DRAWINGS (REV: 11/16/2021)

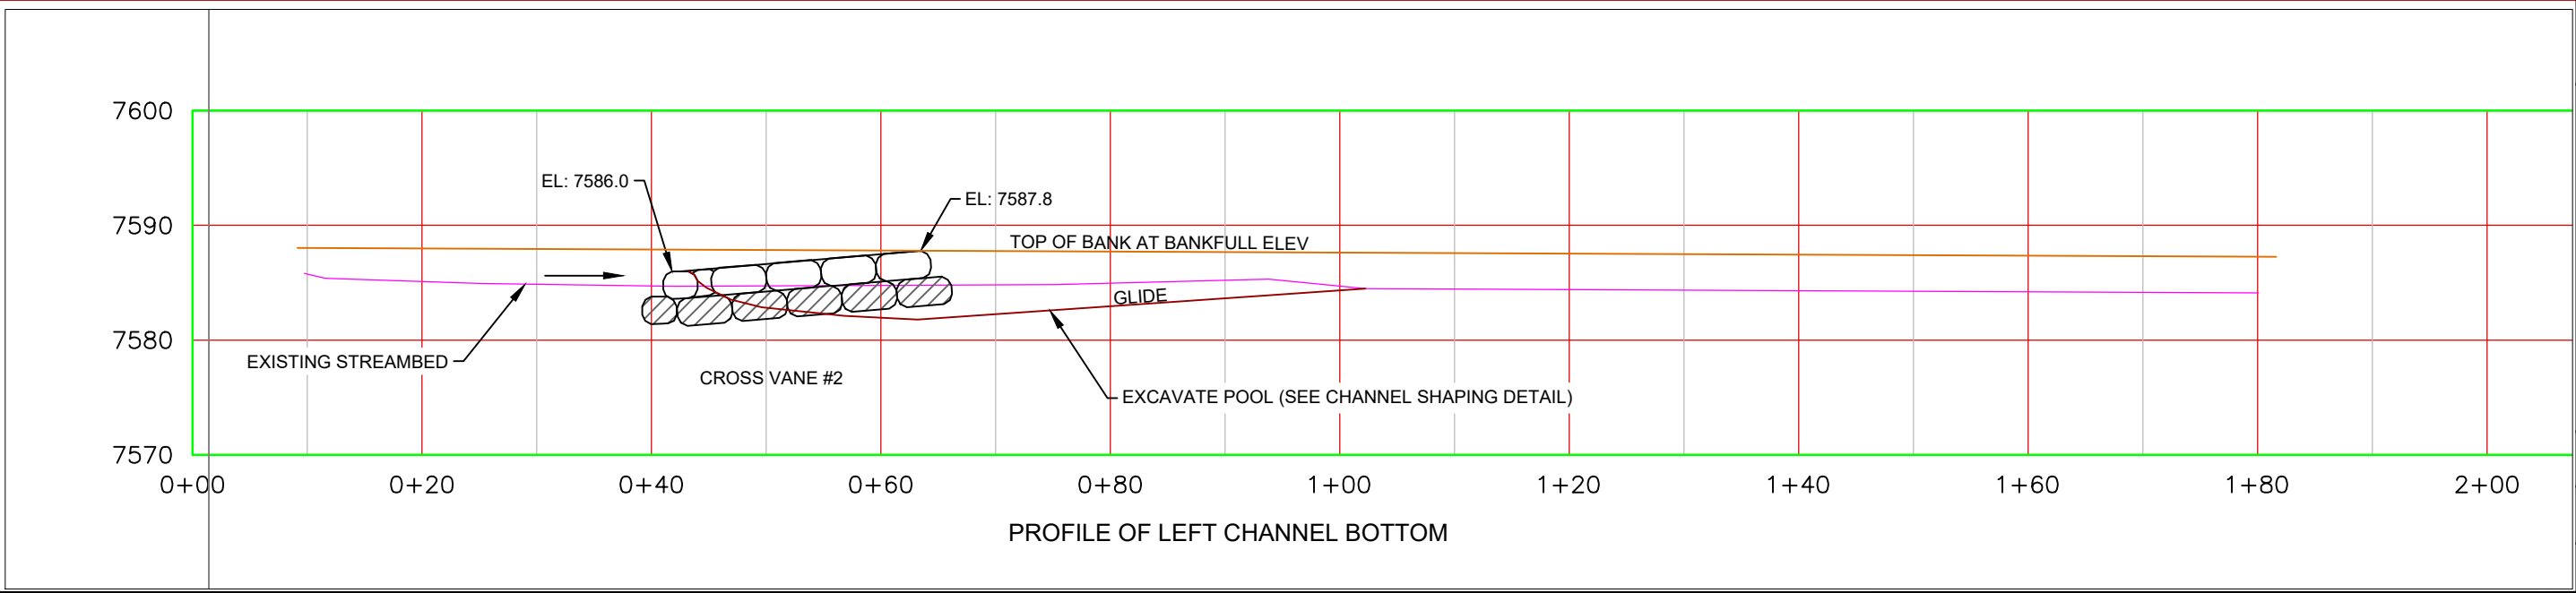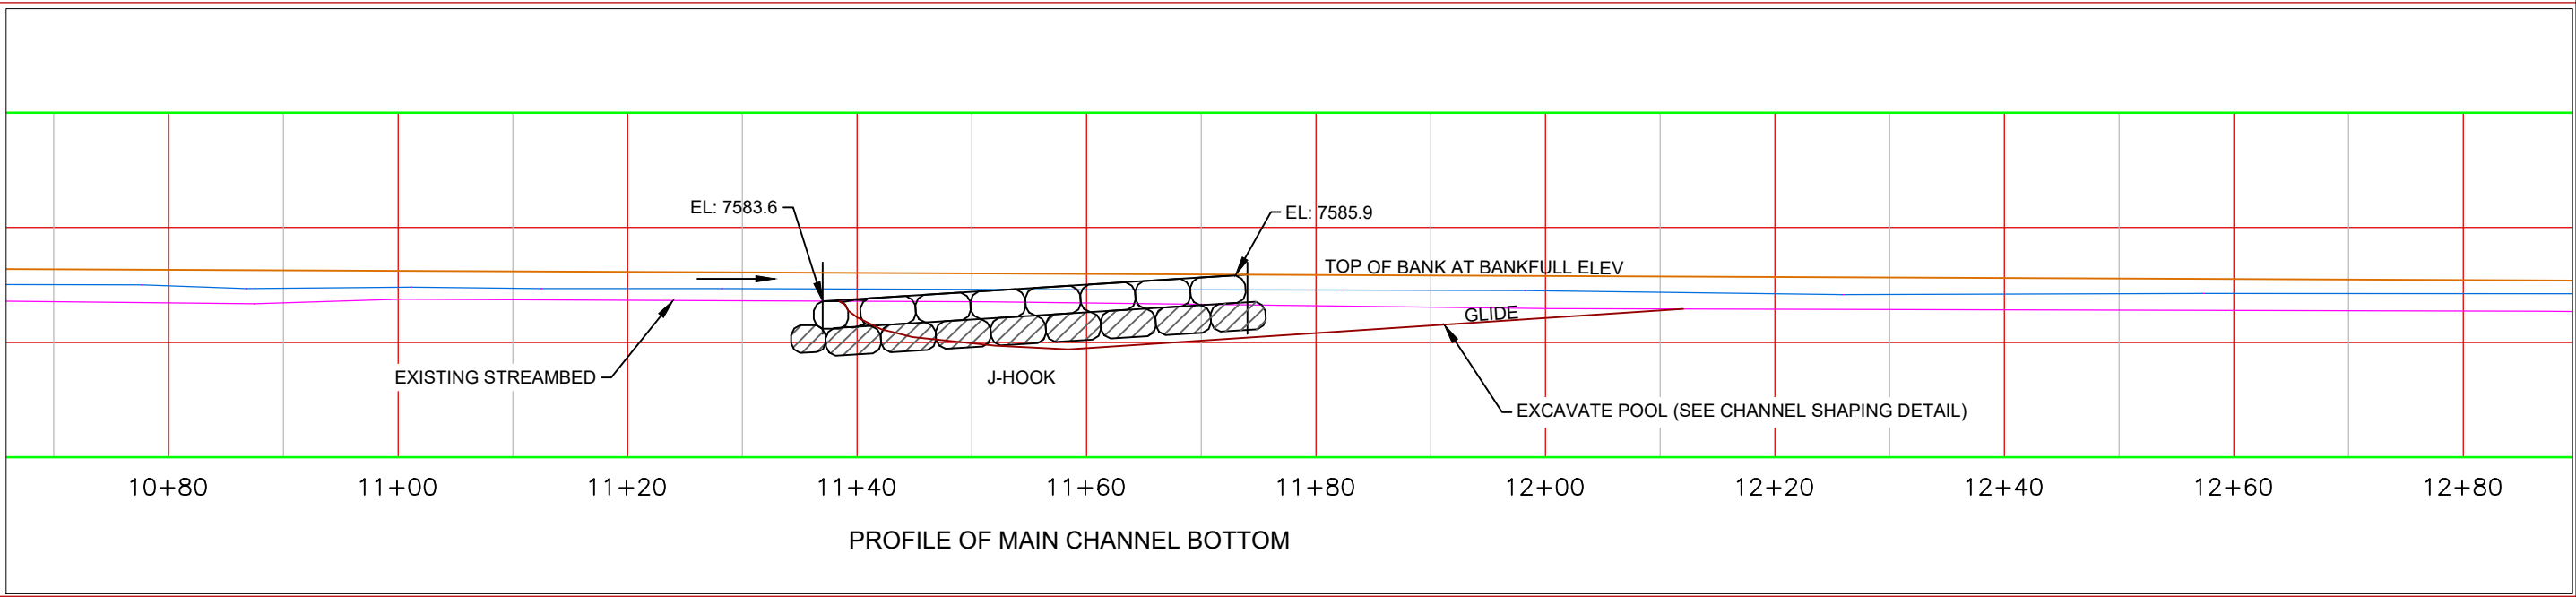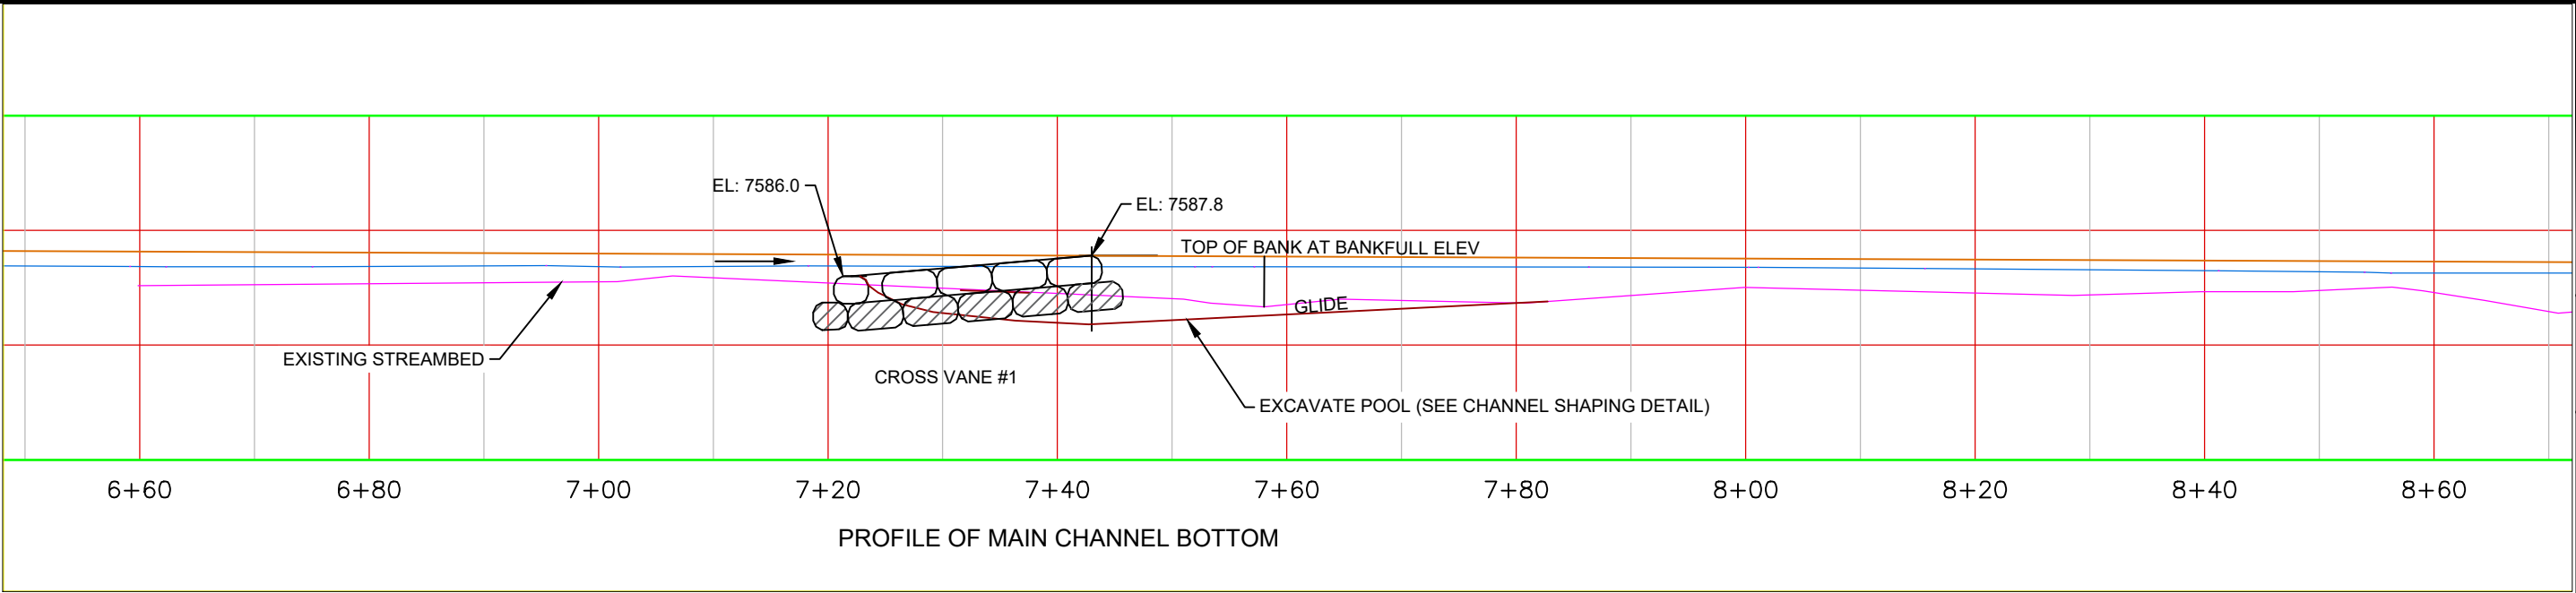


USDA Natural Resources Conservation Service	United States Department of Agriculture	TOMICHI CREEK WATERSHED TOMICHI CREEK UPSTREAM REACH SITE TOMICHI CREEK STREAM RESTORATION - UPPER REACH			
	PROFILES				
	JOB CLASS: V				
	SHEET REVISED: 11/09/2021				

Designed by:	TJ BURR	Date	3/3/2021
Drawn by:	TJ BURR		3/3/2021
Checked by:	J. ANDREWS		4/5/2021
Approved by:	J. ANDREWS		4/5/2021

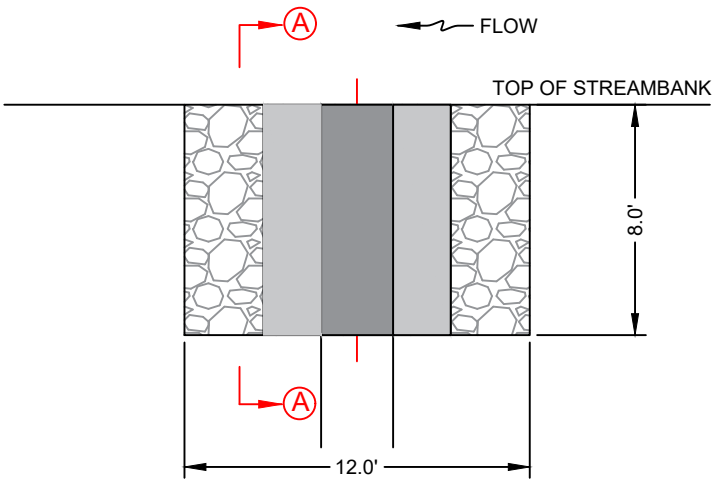


PLAN VIEW

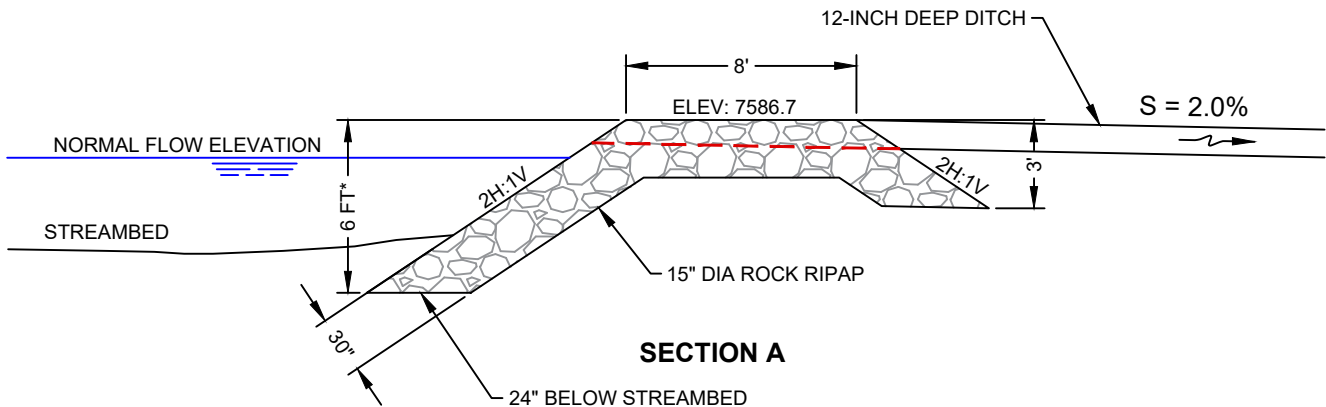

SECTION A


* DEPTH COULD VARY, 6 FT
USED FOR QUANTITY ESTIMATE

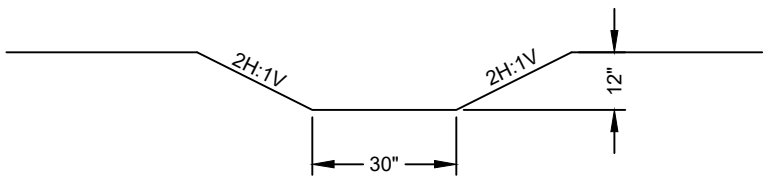


DITCH CROSS-SECTION

HARDENED BANK OVERFLOW DETAIL


(NOT TO SCALE)

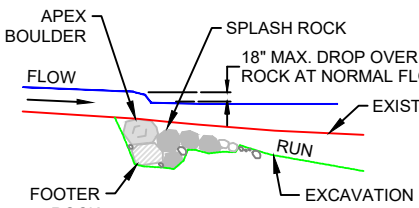


SECTION A
(AT APEX OF HOOK)

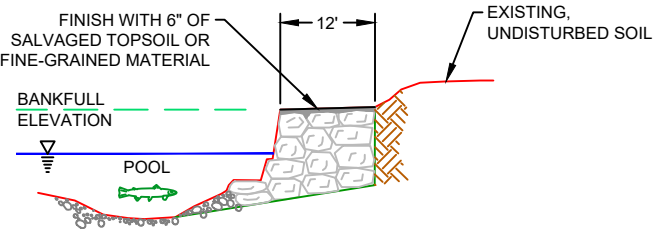

SECTION B
(AT ROCK SILL)

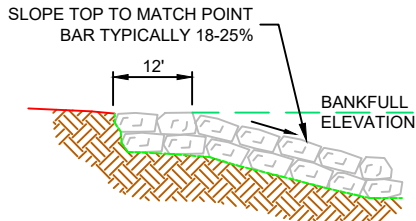

SECTION C
(HOOK CUTOFF SILL)




W: Intermediate Axis (Diameter)
L: Long Axis (Length)
H: Short Axis (Height)

	STRUCTURE ROCK SIZE			
	Representative Size			
	W or Dia (Feet)	Length (Feet)	Height (Feet)	Weight (Ton)
Minimum	2.8	4.2	2.2	1.83
Average (D50)	3.0	4.8	2.4	2.42


Assumed Rock Density: 165 LB/CU-FT

ROCK NOTES:

- A. PROVIDE A RANGE OF ROCK SIZES FOR FLEXIBILITY TO MEET DESIGN GRADES & LINES. AT LEAST 80% OF THE ROCK SHALL MEET OR EXCEED THE AVERAGE SIZE ROCK REQUIREMENTS; UP TO 15% OF ROCK MAY BE IN THE MINIMUM TO AVERAGE SIZE CATEGORY; AND 5% MAY BE SMALLER FRAGMENTS FOR CHINKING USE.
- B. SMALLER HEIGHT ROCKS ARE REQUIRED TO TAPER STRUCTURES AT APEX ON BEDROCK. FOOTER ROCKS SHALL MEET STRUCTURE ROCK REQUIREMENTS.
- C. FOR MAIN STRUCTURE ROCK, SILL, AND FOOTER ROCK, THE ROCK SOURCE SHALL BE FROM AN ACCEPTABLE CDOT QUARRY OR FROM ENGINEER APPROVED SOURCE. USE LARGER ROCK, IF AVAILABLE.
- D. ON-SITE COBBLE AND BOULDERS MAY BE USED TO FILL VOIDS AND FOR SPLASH ROCKS, BUT NOT FOR USE AS ANY MAIN STRUCTURE ROCK.

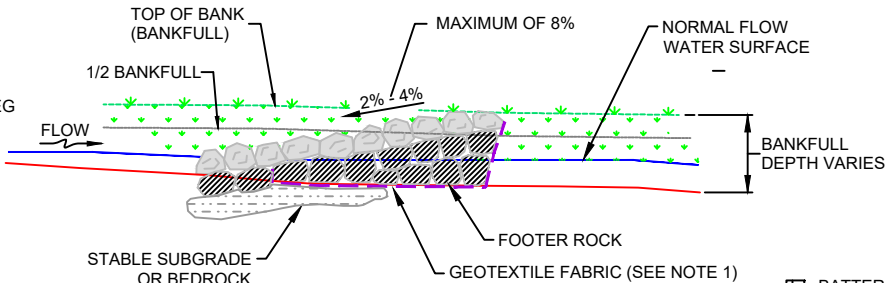

PROFILE
(ALONG VANE ARM)

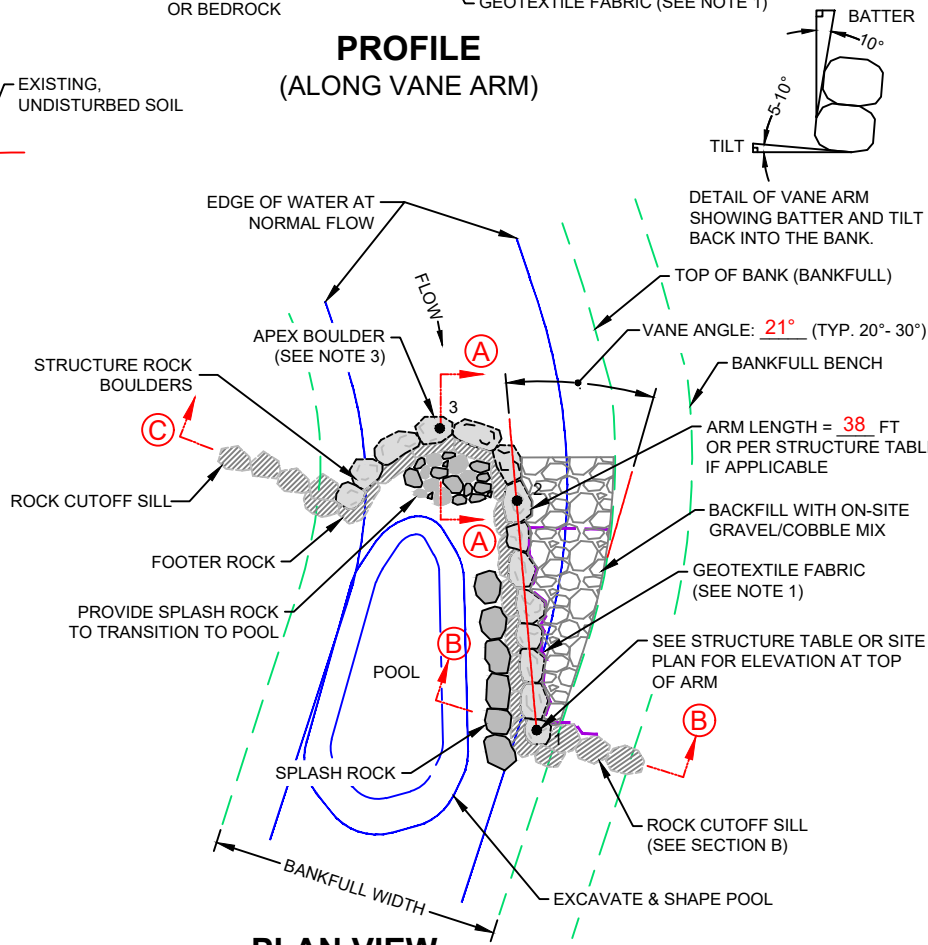

PLAN VIEW

EXAMPLE J-HOOK VANE DETAIL

NOT TO SCALE

NOTES:

1. USE CLASS I, NON-WOVEN GEOTEXTILE FABRIC AS DESCRIBED IN THE SPECIFICATIONS. PLACE GEOTEXTILE BEHIND THE ARM (UPSTREAM SIDE), DRAPED FROM TOP OF ROCK STRUCTURE TO BOTTOM OF FOOTER ROCK AND EXTEND A MINIMUM OF HALF THE TRENCH BOTTOM WIDTH. TRIM EXCESS OR VISIBLE FABRIC.
2. MAXIMUM WATER SURFACE GRADE DROP ACROSS THE APEX OF ROCK HOOK IS 12 INCHES MEASURED ALONG THE STREAM PROFILE. SEE SECTION A.
3. CAREFULLY SELECT THE APEX ROCK TO FIT THE GAP. THE APEX ROCK IS EQUIVALENT TO A KEYSTONE IN AN ARCH. WEDGE THE ROCK INTO PLACE. THE APEX ROCK IS ALSO THE THALWEG OF THE CHANNEL. PLACE SO THE LOW POINT ON TOP OF THE ROCK (PT 3) IS 0.5 FT BELOW THE END OF THE VANE ARM (PT 2).

Date	3/3/2021
Designed by:	TJ BURR
Drawn by:	TJ BURR
Checked by:	J. ANDREWS
Approved by:	J. ANDREWS

TOMICHI CREEK WATERSHED
TOMICHI CREEK STREAM RESTORATION - UPPER REACH

GUNNISON COUNTY, CO

DETAILS 1 - J-HOOK



Job Class

V



FILE NO.

Drawings_Tomichi_Upper Reach.dwg

REVISED:

11/16/2021


SHEET 11 OF 14

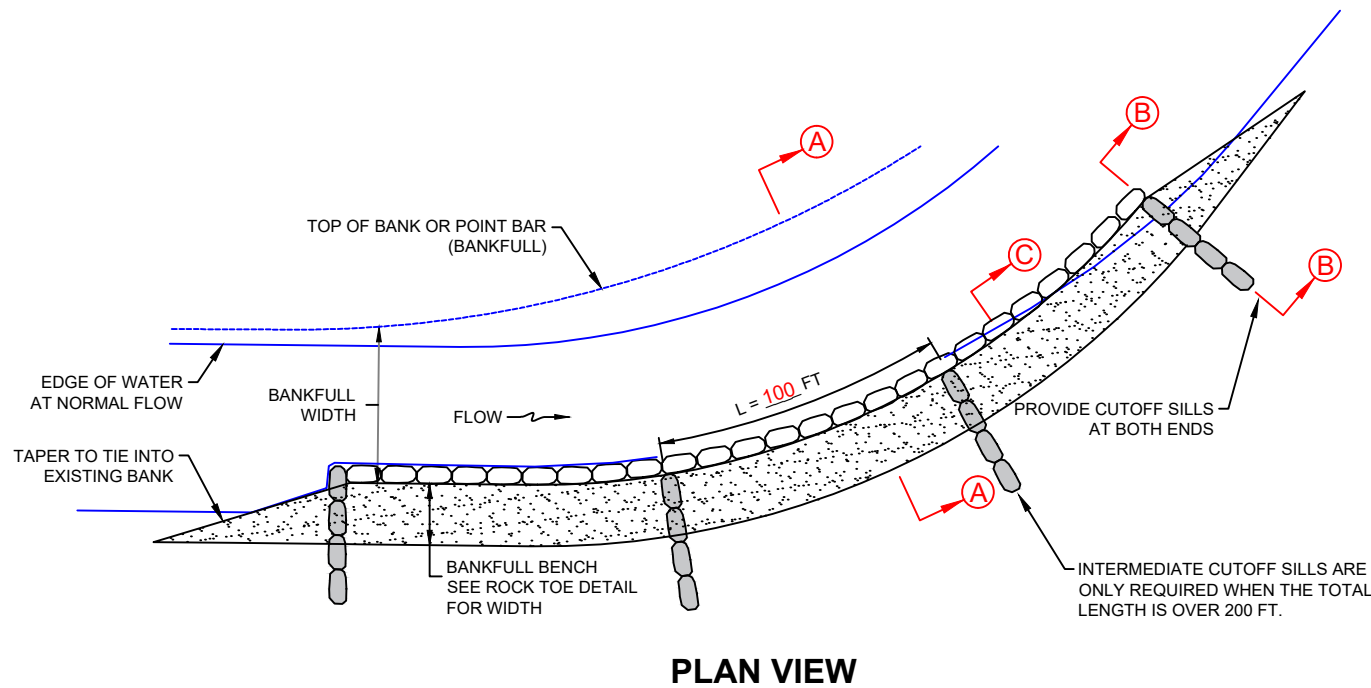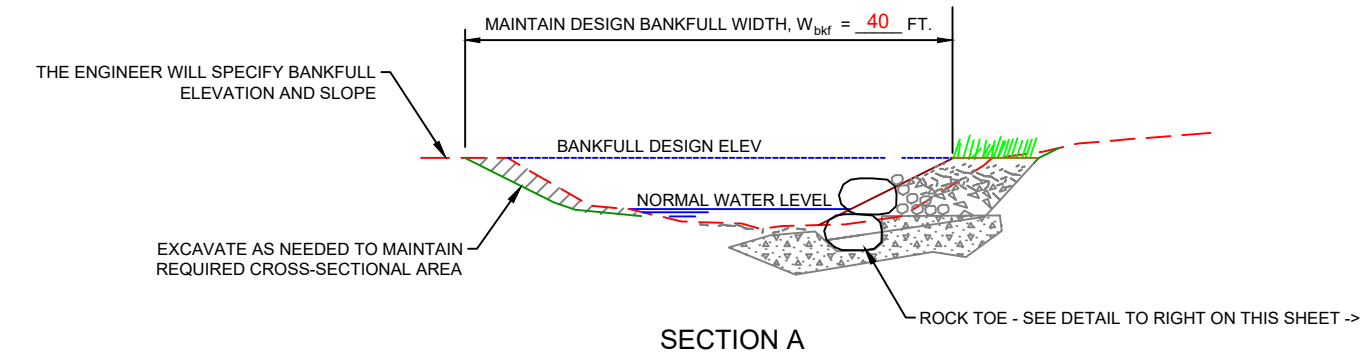


NOTES:

1. FINISH GRADE THE BANKFULL BENCH TO THE SPECIFIED ELEVATION AND SLOPE. THE SLOPE SHOULD MATCH THE BANKFULL FLOW SLOPE.
2. USE ON-SITE MATERIAL OR DESIGNATED BORROW FOR THE BANKFULL BENCH FILL. USE FINER GRAIN MATERIAL ON TOP.
3. COMPACT BANKFULL BENCH IN 12-18 INCH LIFTS USING EQUIPMENT. ADD WATER FROM THE STREAM TO ACHIEVE GOOD COMPACTION.
4. "WASH" THE BENCH FILL USING THE EXCAVATOR BUCKET TO CONSOLIDATE THE MATERIAL.
5. START AND END BENCH IN STABLE BANKS WITH NATURAL ANCHOR POINTS WHEN POSSIBLE.

DETAIL OF BANKFULL BENCH WITH ROCK TOE
NOT TO SCALE

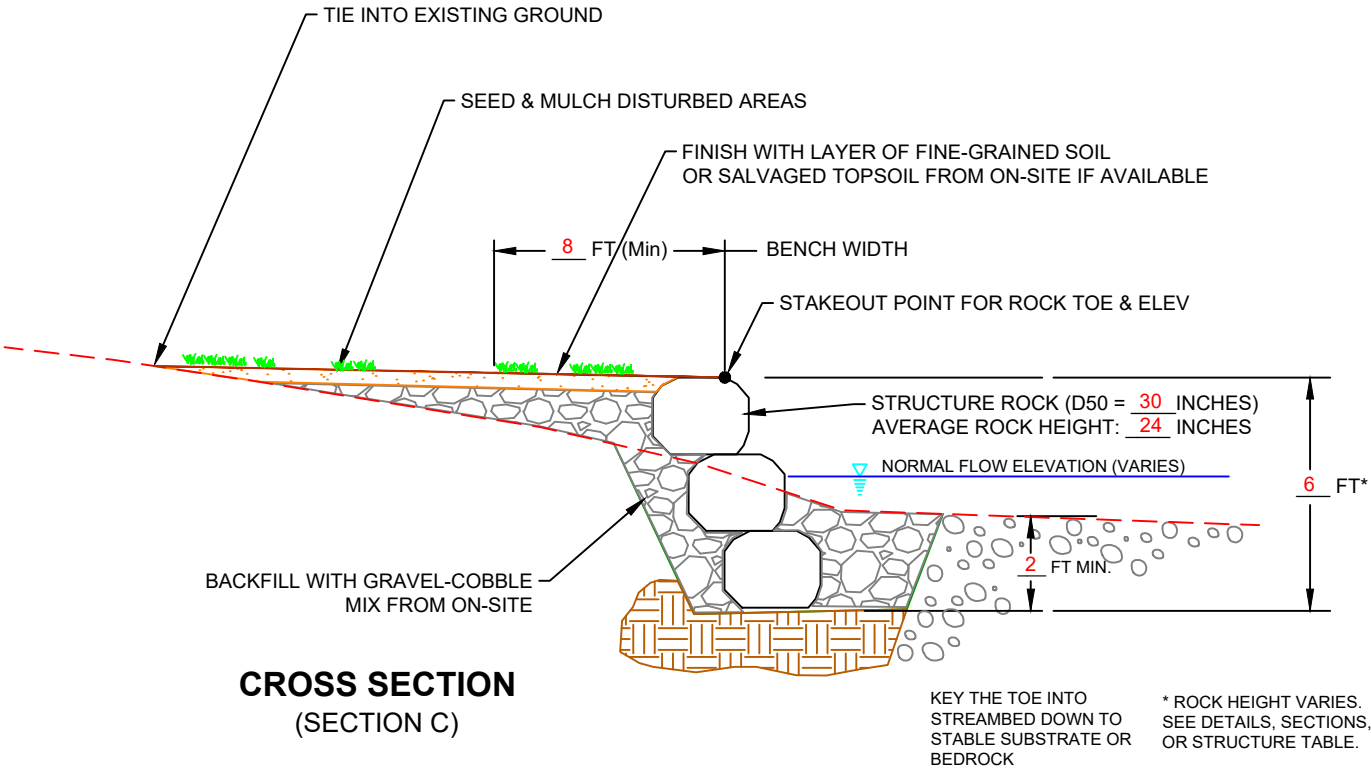


CROSS SECTION
(SECTION C)



NOTES:

1. KEY UPSTREAM AND DOWNSTREAM ENDS INTO STABLE BANKS. SEE SECTION VIEW FOR CUTOFF SILL.
2. PROVIDE STRUCTURE ROCK MEETING THE SPECIFICATIONS FROM A CDOT APPROVED QUARRY OR ENGINEER APPROVED SOURCE.
3. STAGGER THE ROCK JOINTS OF EACH ROW OF ROCK.
4. FILL VOIDS WITH ON-SITE GRAVEL-COBBLE MIX.
5. SCHEDULE IN-STREAM WORK DURING LOW FLOW CONDITIONS.
6. SEED & MULCH ALL DISTURBED EARTH SURFACES ACCORDING TO THE SPECIFICATIONS. PROVIDE EROSION CONTROL FABRIC ON SLOPES STEEPER THAN 3H:1V OR AS SPECIFIED BY THE EROSION CONTROL FABRIC DETAIL.
7. IF NO ON-SITE DISPOSAL AREAS ARE AVAILABLE, THE CONTRACTOR IS RESPONSIBLE FOR REMOVAL AND PROPER DISPOSAL OF EXCESS MATERIAL.

ROCK TOE TYPE 2 DETAIL
(With bench, live stakes, & bank shaping)
(NOT TO SCALE)

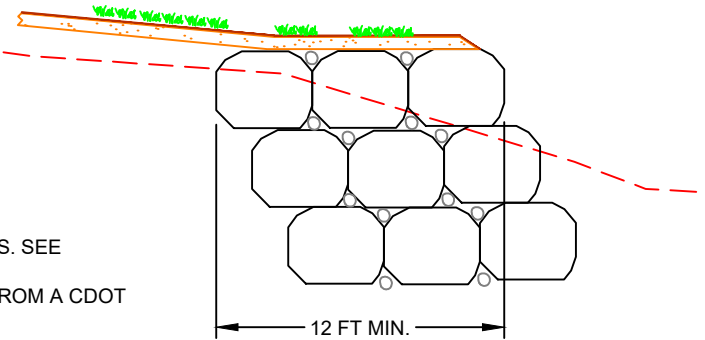

CUTOFF SILL
(SECTION B)


PROVIDE CUTOFF SILLS AT UPSTREAM & DOWNSTREAM ENDS OF ROCK TOE. ONE ROCK WIDTH WIDE BY THREE ROCK LENGTHS PERPENDICULAR TO FLOW. IF TOTAL LENGTH IS 200 FT OR MORE, PROVIDE INTERMEDIATE ROCK SILLS EVERY 100 FT

Designed by:	TJ BURR	Date	3/3/2021
Drawn by:	TJ BURR		3/3/2021
Checked by:	J. ANDREWS		4/5/2021
Approved by:	J. ANDREWS		4/5/2021

TOMICHI CREEK WATERSHED
TOMICHI CREEK STREAM RESTORATION - UPPER REACH
GUNNISON COUNTY, CO
DETAILS 2 - ROCK TOE



Job Class	V
FILE NO.	Drawings_Tomichi_Upper Reach.dwg
REVISED:	3/3/2021
SHEET 12 OF 14	

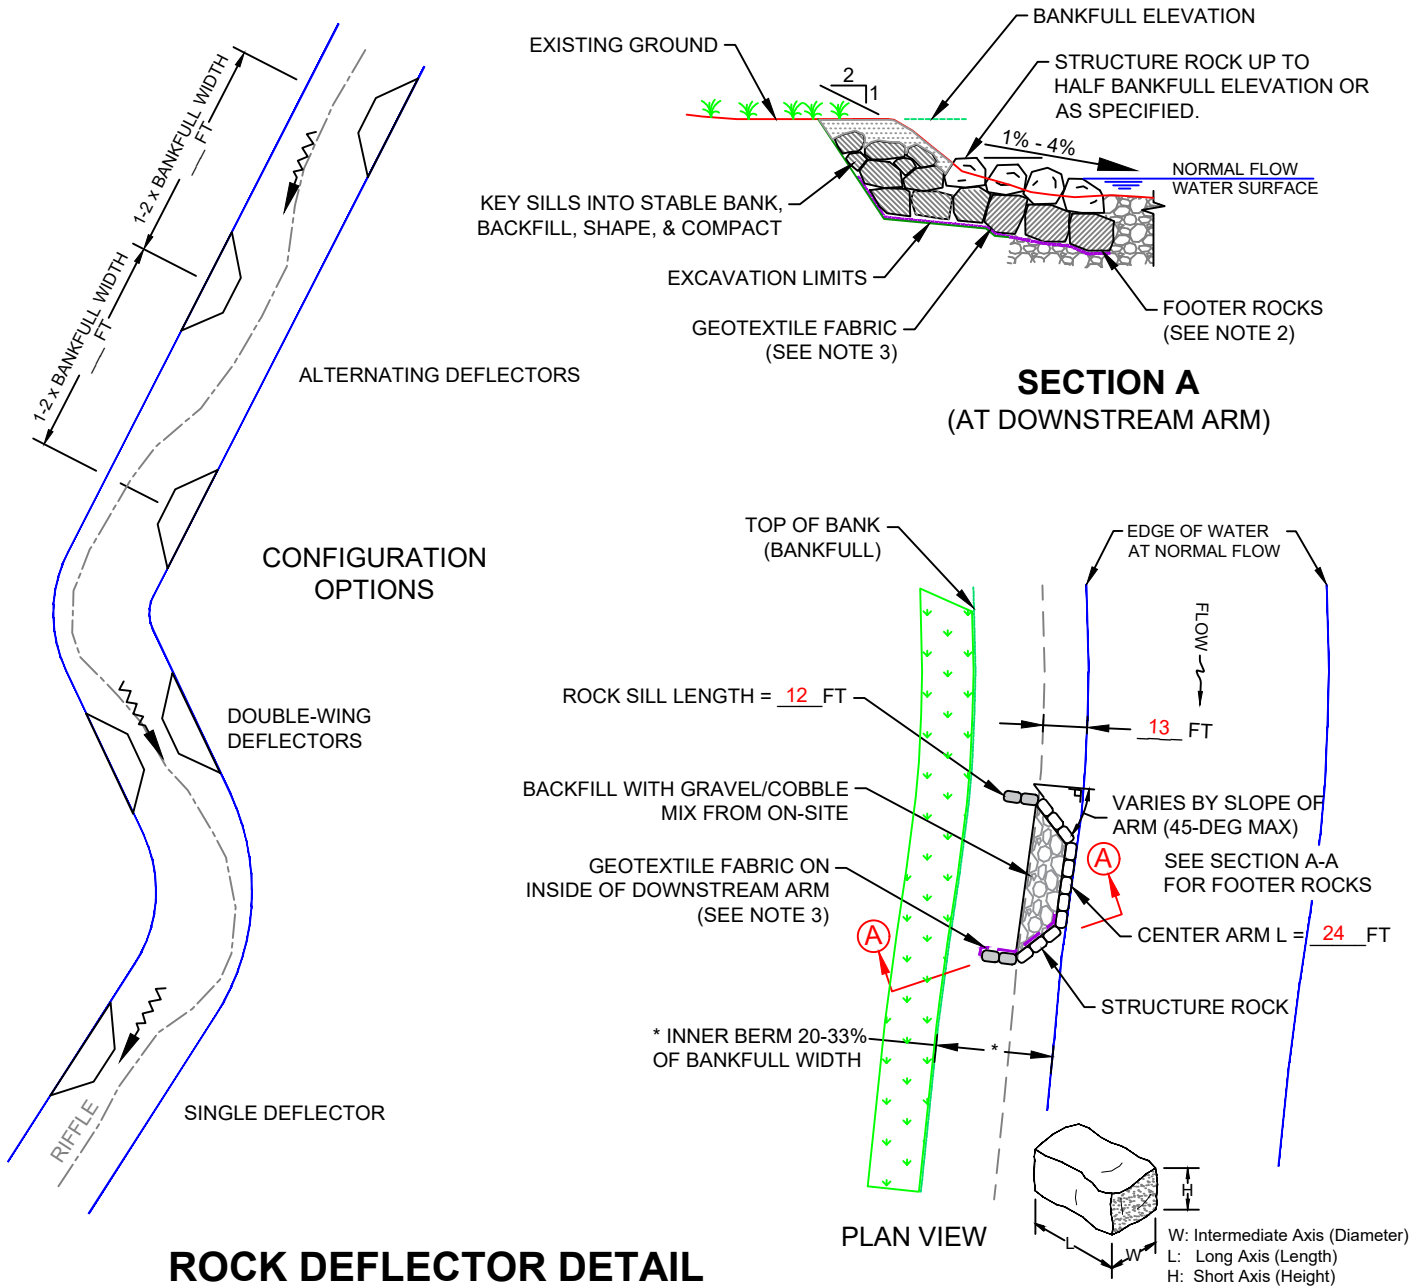

ROCK DEFLECTOR DETAIL

NOT TO SCALE

NOTES:


1. THE EDGE OF WATER AT NORMAL FLOW IS TYPICALLY ALONG INNER BERM FEATURES AT $\frac{1}{3}$ TO $\frac{1}{2}$ BANKFULL DEPTH.
2. EXTEND FOOTER ROCKS TO SCOUR DEPTH OR LOWER. THIS COULD REQUIRE ONE OR MORE ADDITIONAL ROCK LAYERS.
3. USE CLASS I, NON-WOVEN GEOTEXTILE FABRIC PER THE SPECIFICATIONS.
4. BACKFILL SHALL MEET THE REQUIREMENTS OF THE EARTHFILL AND EARTHWORK SPECIFICATIONS.
5. IF SHRUBS AND TREES ARE SPECIFIED FOR SITE RESTORATION, REFER TO THE PLANTING DRAWING AND SPECIFICATIONS.
6. TYPICAL SPACING OF DOUBLE WING DEFLECTORS IS 5-7 TIMES BANKFULL WIDTH.
7. EXTEND CUTOFF SILLS INTO STABLE BANK MATERIAL. HEIGHT OF SILL AT LEAST TWICE THE HEIGHT OF STRUCTURE ROCK.

STRUCTURE ROCK SIZE				
Representative Size				
	W or Dia (Feet)	Length (Feet)	Height (Feet)	Weight (Ton)
Minimum	2.8	4.2	2.2	1.83
Average (D50)	3.0	4.8	2.4	2.42

Assumed Rock Density: 165 LB/CU-FT

ROCK NOTES:



- A. PROVIDE A RANGE OF ROCK SIZES FOR FLEXIBILITY TO MEET DESIGN GRADES & LINES. AT LEAST 80% OF THE ROCK SHALL MEET OR EXCEED THE AVERAGE SIZE ROCK REQUIREMENTS; UP TO 15% OF ROCK MAY BE IN THE MINIMUM TO AVERAGE SIZE CATEGORY; AND 5% MAY BE SMALLER FRAGMENTS FOR CHINKING USE.
- B. SMALLER HEIGHT ROCKS ARE REQUIRED TO TAPER STRUCTURES AT APEX ON BEDROCK. FOOTER ROCKS SHALL MEET STRUCTURE ROCK REQUIREMENTS.
- C. FOR MAIN STRUCTURE ROCK, SILL, AND FOOTER ROCK, THE ROCK SOURCE SHALL BE FROM AN ACCEPTABLE CDOT QUARRY OR FROM ENGINEER APPROVED SOURCE.
- D. ON-SITE COBBLE AND BOULDERS MAY BE USED TO FILL VOIDS AND FOR SPLASH ROCKS, BUT NOT FOR USE AS ANY MAIN STRUCTURE ROCK.

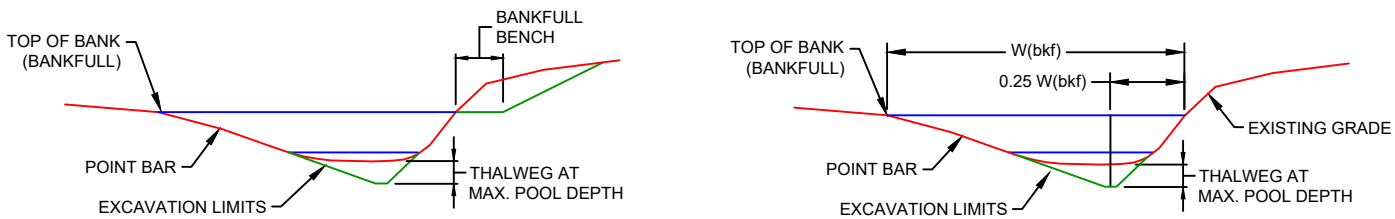

SECTION A (WITH BENCH)

EXCAVATE DEEPEST PART OF POOL TO A MINIMUM DEPTH OF 2 FEET BELOW EXISTING STREAMBED OR DOWN TO BEDROCK. SEE NOTE 6.

SECTION A (WITHOUT BENCH)

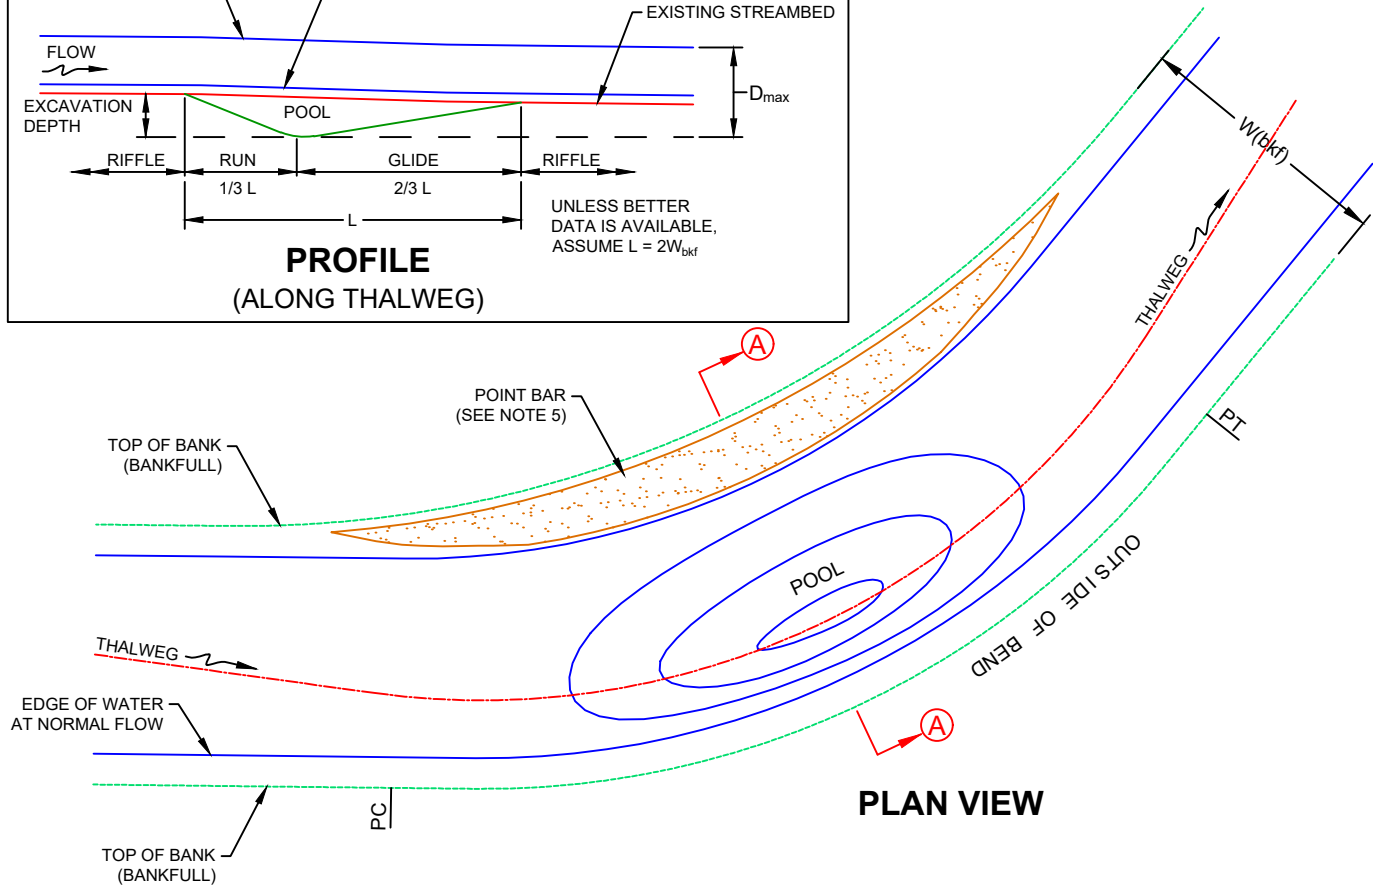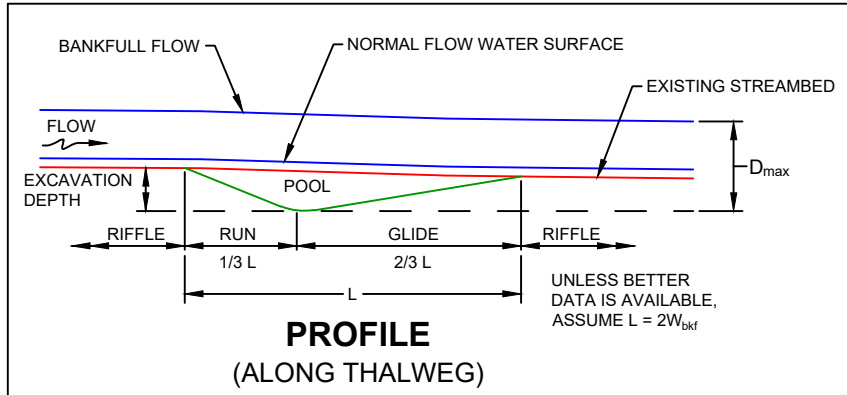

CHANNEL SHAPING AT POOL

EXAMPLE DETAIL
(NOT TO SCALE)

NOTES:





1. USE EXCAVATED MATERIAL TO RE-SHAPE BANKS, BUILD POINT BARS, OR FOR BACKFILL OF OTHER WORK.
2. USE THE "BENCHED OPTION" WHENEVER PRACTICAL BASED ON SITE CONSTRAINTS.
3. TYPICAL POOL-TO-POOL SPACING IS EVERY 5-7 BANKFULL WIDTHS.
4. USE THIS DETAIL WITH OTHER STREAM RESTORATION MEASURES TO SHOW FEATURES OF A NATURAL CHANNEL SHAPE.
5. SHAPE THE POINT BAR TO MATCH EXISTING POINT BAR SLOPE OR NEARBY POINT BAR SLOPES. IF NO SLOPE IS AVAILABLE OR SPECIFIED, USE 4H:1V. THE FINISH GRADE OF THE POINT BAR SHOULD BE ROUGH, NOT SMOOTH AND COMPACTED.
6. NOTE THE ELEVATION OF EXISTING STREAMBED BEFORE STARTING EXCAVATION TO GET THE CORRECT FINISH POOL DEPTH.

Date	3/3/2021
Designed by:	TJ BURR
Drawn by:	TJ BURR
Checked by:	J. ANDREWS
Approved by:	J. ANDREWS

TOMICHI CREEK WATERSHED
TOMICHI CREEK STREAM RESTORATION - UPPER REACH
GUNNISON COUNTY, CO
DETAILS 3 - DEFLECTOR



Job Class	V
FILE NO.	Drawings_Tomichi_Upper_Reach.dwg
REVISED:	7/15/2021
SHEET 13 OF 14	

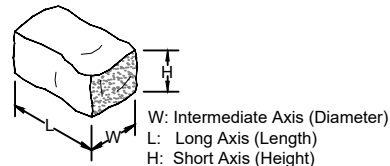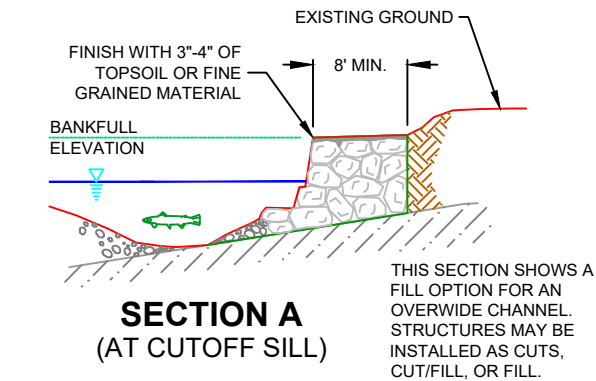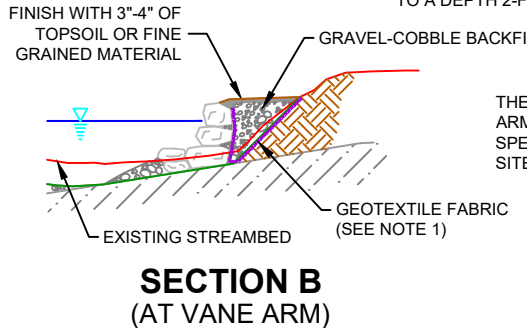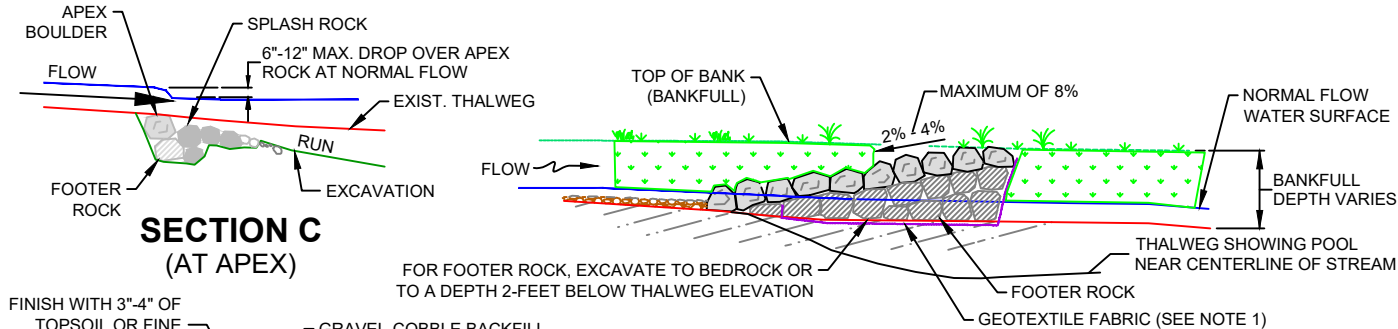

	STRUCTURE ROCK SIZE			
	Representative Size			
	W or Dia (Feet)	Length (Feet)	Height (Feet)	Weight (Ton)
Minimum	2.0	3.2	1.6	0.7
Average (D50)	3.0	4.8	2.4	2.4

Assumed Rock Density: 165 LB/CU-FT

ROCK NOTES:

- PROVIDE A RANGE OF ROCK SIZES FOR FLEXIBILITY TO MEET DESIGN GRADES & LINES. AT LEAST 80% OF THE ROCK SHALL MEET OR EXCEED THE AVERAGE SIZE ROCK REQUIREMENTS; UP TO 15% OF ROCK MAY BE MINIMUM TO AVERAGE SIZE; AND 5% MAY BE SMALLER FRAGMENTS USED TO FILL GAPS.
- SMALLER HEIGHT ROCKS ARE REQUIRED TO TAPER STRUCTURES AT APEX ON BEDROCK. FOOTER ROCKS SHALL MEET STRUCTURE ROCK REQUIREMENTS.
- FOR MAIN STRUCTURE ROCK, SILL, AND FOOTER ROCK, THE ROCK SOURCE SHALL BE FROM AN ACCEPTABLE CDOT QUARRY OR FROM ENGINEER APPROVED SOURCE.
- ON-SITE COBBLE AND BOULDERS MAY BE USED TO FILL VOIDS AND FOR SPLASH ROCKS, BUT NOT FOR USE AS ANY MAIN STRUCTURE ROCK.


NOTES:

- USE CLASS I, NON-WOVEN GEOTEXTILE FABRIC AS DESCRIBED IN THE SPECIFICATIONS. PLACE GEOTEXTILE BEHIND THE ARM (UPSTREAM SIDE), DRAPED FROM TOP OF ROCK STRUCTURE TO BOTTOM OF FOOTER ROCK AND EXTEND A MINIMUM OF HALF THE TRENCH BOTTOM WIDTH. TRIM EXCESS OR VISIBLE FABRIC.
- FOR STEEP STREAM SLOPES OR WHERE ADDITIONAL GRADE DROP IS REQUIRED, STEPS MAY BE ADDED ACCORDING TO THE CROSS VANE (WITH STEP) DETAIL.
- BOULDER VANE ARMS MAY NOT BE SYMMETRICAL. ARM LENGTHS MAY BE SKEWED TO MATCH EXISTING SITE CONDITIONS OR STREAM ALIGNMENT.
- THE APEX BOULDER IS THE EQUIVALENT OF A KEYSTONE IN AN ARCH STRUCTURE. PLACE IT SO IT IS WEDGED IN PLACE BY THE FORCE OF THE WATER. IT SHOULD BE THE LOWEST BOULDER.
- THE NUMBER OF ROCK COURSES VARIES BY BANK HEIGHT AND DEPTH TO STABLE SUBSTRATE.
- USE THE EXCAVATOR BUCKET TO DUMP ("WASH") WATER ACROSS THE BACKFILL TO CONSOLIDATE IT.

TYPICAL CROSS VANE DETAIL

NOT TO SCALE

PROFILE
(ALONG ARM)

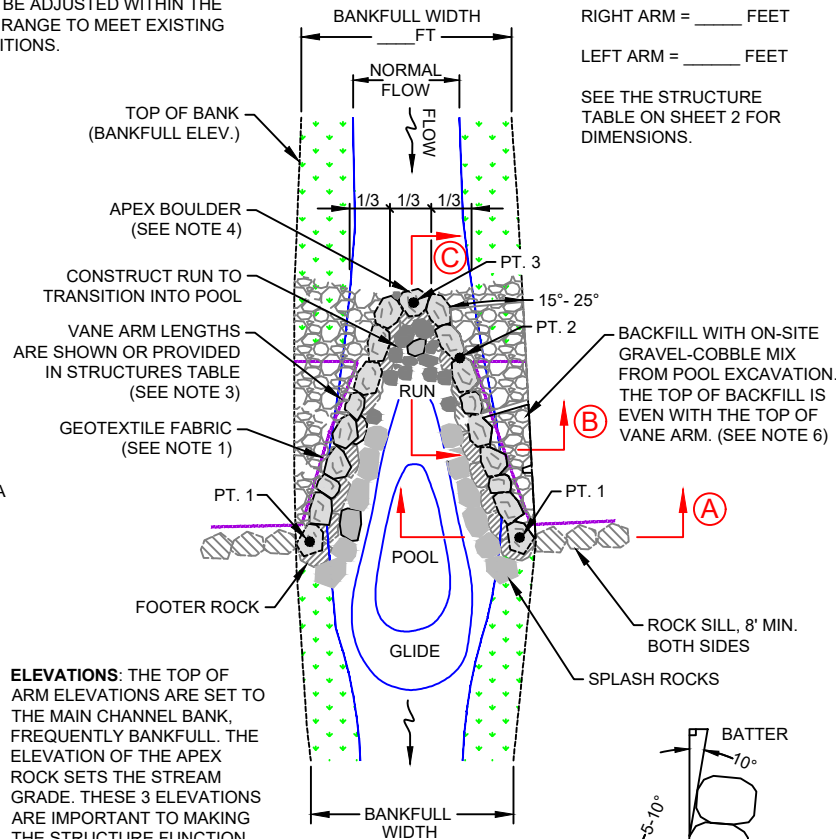


PLAN VIEW

LENGTHS

RIGHT ARM = ____ FEET

LEFT ARM = ____ FEET

SEE THE STRUCTURE TABLE ON SHEET 2 FOR DIMENSIONS.



DETAIL OF VANE ARM SHOWING BATTER AND TILT BACK INTO THE BANK.

Date	3/3/2021
Designed by:	TJ BURR
Drawn by:	TJ BURR
Checked by:	J. ANDREWS
Approved by:	J. ANDREWS

TOMICHI CREEK WATERSHED
TOMICHI CREEK STREAM RESTORATION - UPPER REACH
GUNNISON COUNTY, CO
DETAILS 4 - CROSS VANE



Job Class
V

FILE NO.
Drawings_Tomichi_Upper Reach.dwg

REVISED:
11/09/2021


SHEET 14 OF 14

Conservation Plan Map

Client(s): L & P RANCH INC
Gunnison County, Colorado
Approximate Acres: 187.0

Assisted By: DANIEL OLSON
NATURAL RESOURCES CONSERVATION SERVICE
GUNNISON SERVICE CENTER
GUNNISON CONSERVATION DISTRICT

Land Units: Tract 5, Fields 1,2

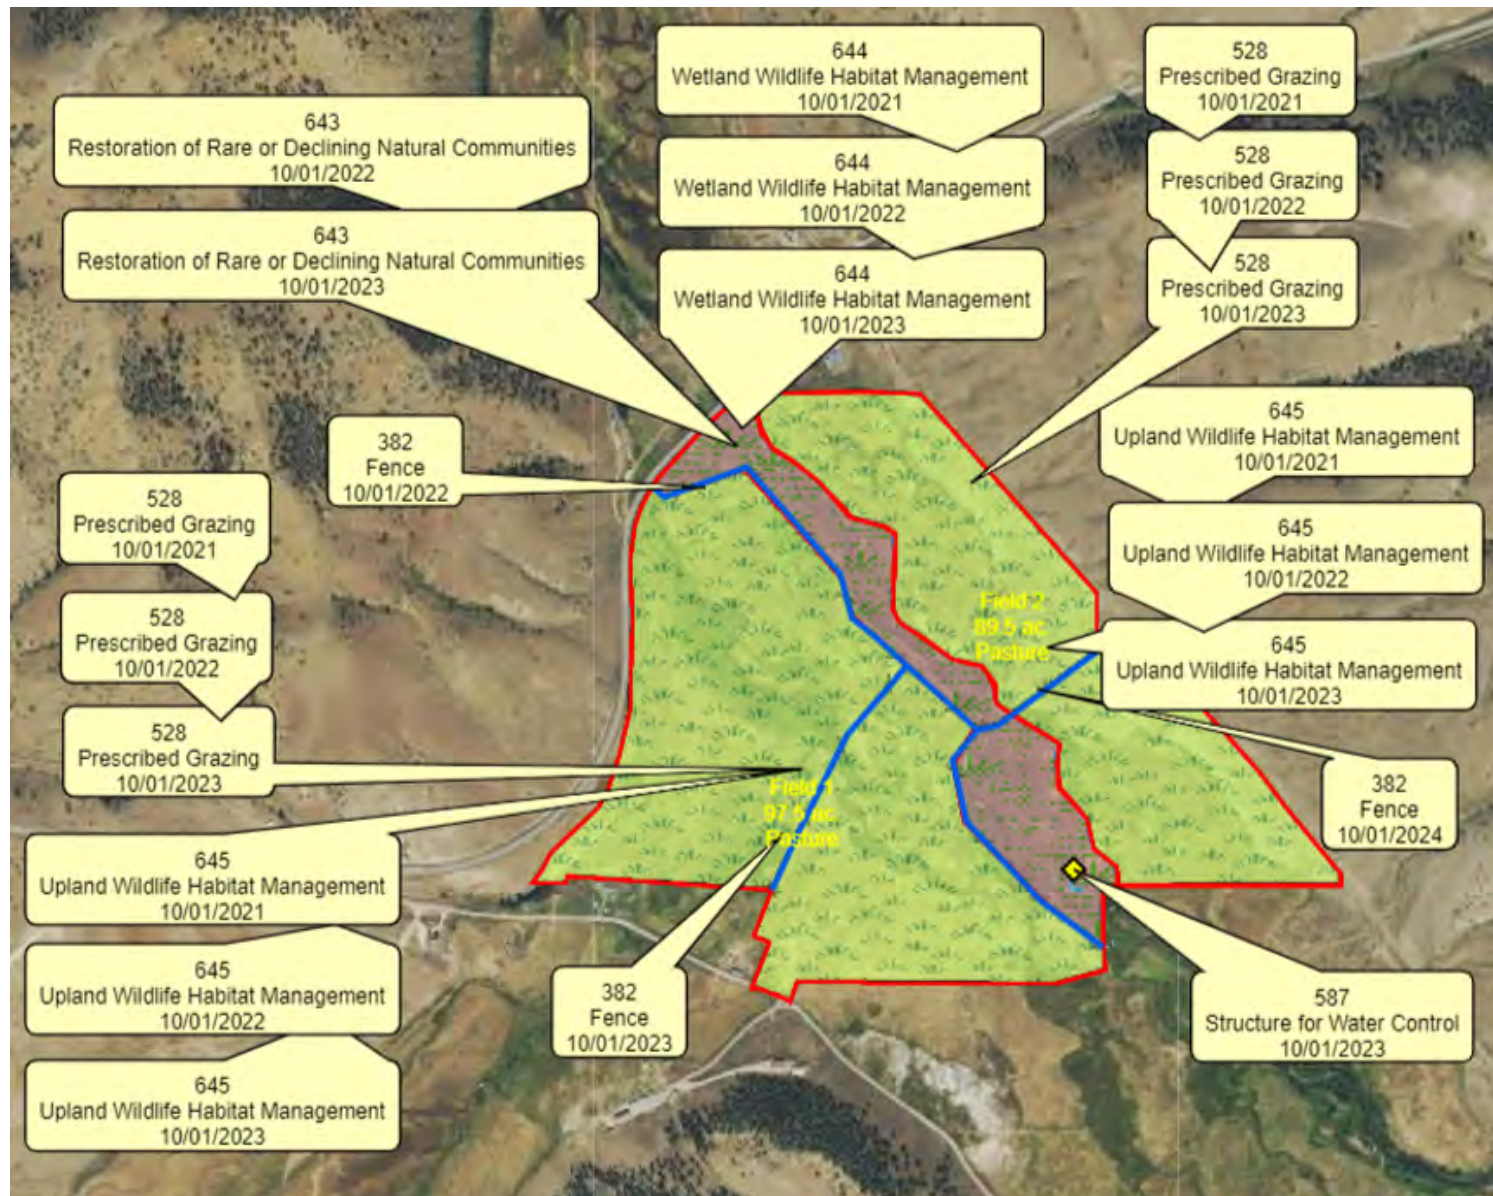

USDA-NRCS-NGCE & USDA-FSA-APFO

Prepared with assistance from USDA-Natural Resources Conservation Service

0 750
Feet



Practice Schedule
PLUs

Conservation Practice
Points

Structure for Water
Control (587)

Conservation
Practice Lines

Fence (382)

Conservation Practice
Polygons

Restoration of Rare or
Declining Natural
Communities (643)

Wetland Wildlife
Habitat Management
(644)

Upland Wildlife
Habitat Management
(645)


Prescribed Grazing
(528)



Tomichi Preserve



November 30, 2021



Source: Esri, Maxar, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AeroGRID, IGN, and the GIS User Community, Esri, HERE

Jesse Kruthaupt
Maxar | Esri, HERE, Garmin, iPC



Gunnison Service Center
216 North Colorado Street
Gunnison, CO 81230
(970) 707-3045

November 30, 2021

To whom it may concern,

The proposed L&P Ranch project in the Powderhorn Valley has an obligated interest from the Natural Resources Conservation Service (NRCS). The NRCS holds a contract with the L&P Ranch for instream improvements, irrigation water control structures, and fencing to facilitate grazing management improvements. Low tech restoration techniques will be implemented on the ranch in Cebolla Creek and Powderhorn Creek in order to improve stream processes and hydrologic function. Structures will include bank attached and mid-channel PALS and wicker weirs. The fencing will split the property from one field into four and allow for grazing to be implemented in a way that benefits long term production of forage and wildlife habitat. This cross fencing will also limit the duration of livestock access to Cebolla and Powderhorn Creeks. IN this project phase, one structure for water control will be installed to more effectively control and manage irrigation water from the MB and A Ditch. The structure will be a simple steel structure with stack boards that allow for irrigation water to be applied or to pass by to gain the desired soil moisture of approximately 10 acres. Additional irrigation improvements are planned, some needing immediate attention as issues are causing erosion that jeopardizes the integrity of the ditch system and pasture and hay fields. The development of this project has been successful due to the effective collaborative effort from cooperative landowners, US Fish and Wildlife Service, Trout Unlimited, Gunnison Conservation District, Colorado Parks and Wildlife, and the NRCS. Thank you for your consideration in the support of the L&P Ranch conservation project that will offer a suite of ecosystem services benefits for years to come.

Sincerely,

A handwritten signature in blue ink, appearing to read "Daniel Olson".

Daniel Olson – NRCS Resource Conservationist
Gunnison Field Office