

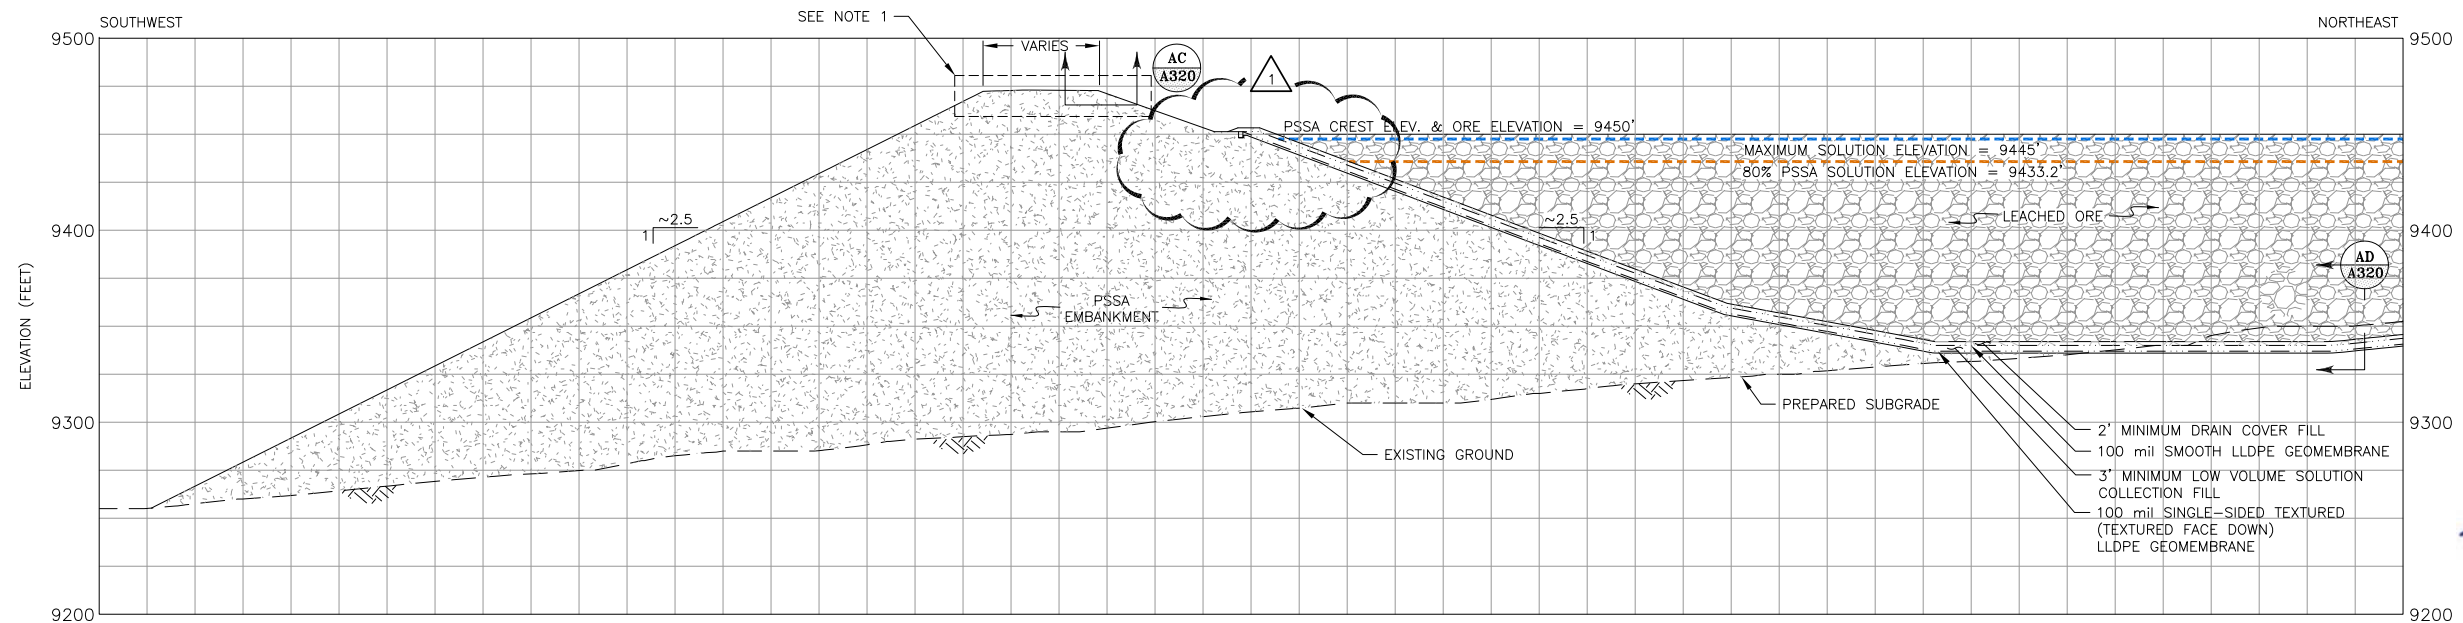


X
A300 TYPICAL PSSA VALLEY SECTION



Y
A300 PSSA EMBANKMENT



NOTE:

1. TOP 2 FEET OF EMBANKMENT FILL SHALL HAVE A RESISTANCE (R) VALUE OF 40. SEE STATE HIGHWAY 67 RELOCATION DRAWINGS.

1	02/13/14	REVISED LINER LIMITS/RE-ISSUED FOR CONSTRUCTION	MEN
0	01/07/13	ISSUED FOR CONSTRUCTION	JNM

DISCLAIMER

AMEC PRODUCED THE INFORMATION PRESENTED ON THIS DRAWING THROUGH THE USE OF TECHNICAL INFORMATION AND PRACTICAL EXPERIENCE SPECIFIC TO ITS EFFORTS. RECEIVING THIS DRAWING DOES NOT GUARANTEE ANY RIGHTS TO SUCH TECHNICAL INFORMATION AND PRACTICAL EXPERIENCE. ANY ALTERATION OR ADAPTATION OF THE DATA OR CONTENTS OF THIS DRAWING SHALL BE AT USER'S SOLE RISK AND WITHOUT ANY LIABILITY OR LEGAL RESPONSIBILITY TO AMEC.

CLIENT	CRIPPLE CREEK & VICTOR GOLD MINING COMPANY		
PROJECT	SQUAW GULCH VLF		
TITLE	PSSA SECTIONS AND DETAILS SHEET 1 OF 4		
DESIGNED BY	JNM	CHECKED BY	JNM
DRAWN BY	DS	APPROVED BY	KFM
FILENAME	1125GD30	DRAWING No.	A310
		REV	1